Order No. MD0103054C2

Service Manual

AV Control Stereo Receiver

*DOLBY DIGITAL

**DIGITAL dts SURROUND

SA-DX850

Color

(K) ... Black Type

E ... Europe

EB ... Great Britain

EG ... Germany and Italy

SPECIFICATIONS

■ FM Tuner Section

Frequency range	**87.5-108 MHz**
Sensitivity	
S/N 30 dB	**1.5 μV/75 Ω**
S/N 26 dB	**1.3 μV/75 Ω**
S/N 20 dB	**1.2 μV/75 Ω**
IHF usable sensitivity (IHF'58)	**1.5 μV/75 Ω**
IHF 46 dB stereo quieting sensitivity	**22 μV/75 Ω**
Total harmonic distortion	
MONO	**0.2%**
STEREO	**0.3%**
S/N	
MONO	**60 dB (73 dB, IHF)**
STEREO	**58 dB (67 dB, IHF)**
Frequency response	
20 Hz-15 kHz	**+1 dB, -2 dB**
Alternate channel selectivity	
±400 kHz	**65 dB**
Capture ratio	**1.5 dB**
Image rejection at 98 MHz	**40 dB**
IF rejection at 98 MHz	**70 dB**
Spurious response rejection at 98 MHz	**70 dB**
AM suppression	**50 dB**
Stereo separation	
1 kHz	**40 dB**
Carrier leak	
19 kHz	**-30 dB (-35 dB, IHF)**
38 kHz	**-50 dB (-55 dB, IHF)**
Channel balance (250 Hz-6.3 kHz)	**±1.5 dB**
Limiting point	**1.2 μV**
Bandwidth	
IF amplifier	**180 kHz**
FM demodulator	**1000 kHz**
Antenna terminal	**75 Ω (unbalanced)**

■ AM Tuner Section

Frequency range	**522-1611 kHz (9 kHz steps)** **530-1620 kHz (10 kHz steps)**
Sensitivity	**20 μV, 330 μV/m**
Selectivity (at 999 kHz)	**55 dB**
IF rejection (at 1000 kHz)	**50 dB**

■ Video Section

Output voltage at 1 V input (unbalanced)	**1±0.1 Vp-p**
Maximum input voltage	**1.5 Vp-p**
Input/output impedance	**75 Ω (unbalanced)**

■ Amplifier Section

Power output

Power output

(at 230 V for Continental Europe)	
(at 240 V for the United Kingdom)	
DIN 1 kHz (T.H.D. 1%)	**2 x 80 W (6 Ω)**
40 Hz-20 kHz continuous power output	
both channels driven	**2 x 60 W (6 Ω)**
Total harmonic distortion	
rated power at 40 Hz-20 kHz	**0.9% (6 Ω)**
half power at 1 kHz	**0.07% (6 Ω)**
Power output at 1 kHz each channel driven	
DIN 1 kHz (T.H.D. 1%)	
Front	**2 x 80 W (6 Ω)**
Center	**80 W (6 Ω)**
Surround	**2 x 80 W (6 Ω)**
Power bandwidth	
both channels driven, -3 dB	**10 Hz-40 kHz (6 Ω)**
Damping factor	**30 (6 Ω)**
Load impedance	**2 x 100 W (6 Ω)**
Front	
(A or B)	**4-16 Ω**
(A and B)	**8-16 Ω**
Center	**6-16 Ω**
Surround	**6-16 Ω**
Frequency response	
PHONO	**RIAA standard curve (30 Hz -15 kHz) ±0.8 dB**
CD, TAPE/MD, DVD, TV, VCR	**10 Hz-40 kHz, ±3 dB**
Input sensitivity and impedance	
PHONO	**3 mV/47 k Ω**
CD, TAPE/MD, DVD, TV, VCR	**200 mV/22 k Ω**
S/N at rated power (6 Ω)	
PHONO	**70 dB (IHF, A: 80 dB)**
CD, TAPE/MD, DVD, TV, VCR	**75 dB (IHF, A: 85 dB)**
Tone controls	
BASS	**50 Hz, +10 to -10 dB**
TREBLE	**20 kHz, +10 to -10 dB**
Output voltage	
TAPE/MD REC (OUT), VCR OUT	**200 mV**
Channel balance (250 Hz-6.3 kHz)	**±1 dB**
Channel separation	**55 dB**
Headphones output level and impedance	**430 mV/330 Ω**
Subwoofer frequency response (-6 dB)	**7-200 Hz**
Digital input	
Optical	**2**
Coaxicial	**1**
■ **General**	
Power supply	
For Continental Europe	**AC 230 V, 50 Hz**
For the United Kingdom	**AC 230-240 V, 50 Hz**
Power consumption	**220 W**
Dimensions (W x H x D)	**430 x 158 x 375 mm**

Mass	**9.3 kg**
Power consumption in standby mode	**2 W**

:

Notes:

1. Specifications are subject to change without notice. / Mass and dimensions are approximate.

2. Total harmonic distortion is measured by the digital spectrum analyzer.

*** Manufactured under license from Dolby Laboratories. "Dolby", "Pro Logic" and the double-D symbol are trademarks of Dolby Laboratories.**

**** Manufactured under license from Digital Theater System. "DTS" and "DTS Digital Surround" are trademarks of Digital Theater System.**

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Technics®

1. Before Repair and Adjustment

Disconnect AC power, discharge Power Supply Capacitors C1702 through a 10 Ω, 5 W resistor to ground. DO NOT SHORT-CIRCUIT DIRECTLY (with a screw driver blade, for instance), as this may destroy solid state devices.

After repairs are completed, restore power gradually using a variac, to avoid over current. Current consumption at AC 230 V-240 V, 50 Hz (EB), 230V, 50 Hz (E/EG) in NO SIGNAL mode should be 200~500 mA.

2. Protection Circuitry

The protection circuitry may have operated if either of the following conditions are noticed:

- No sound is heard when the power is turned on.

- Stops during a performance.

The function of this circuitry is to prevent circuitry damage if, for example, the positive and negative speaker connection wires are "shorted", or if speaker systems with an impedance less than the indicated rated impedance of the amplifier are used.

If this occurs, follow the procedure outlines below:

1. Turn off the power.

2. Determine the cause of the problem and correct it.

3. Turn on the power once again after one minute.

Note:

When the protection circuitry functions, the unit will not operate unless the power is first turned off and then on again.

3. Accessories

AC power supply cord (E/EG)... 1 pc.

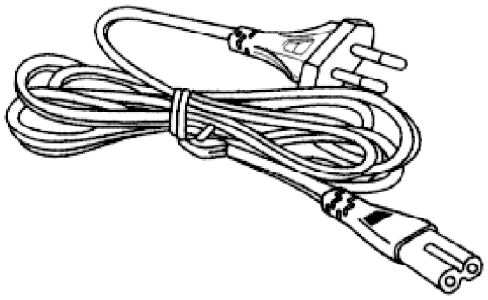

AC power supply cord (EB)... 1pc.

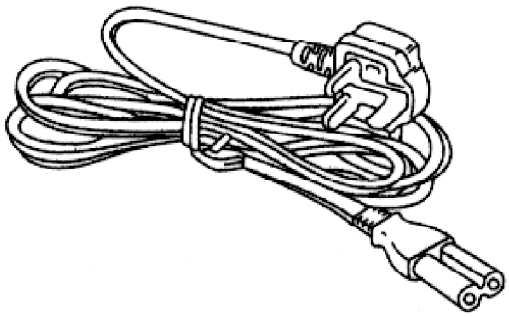

AM Loop Antenna Set... 1 set.

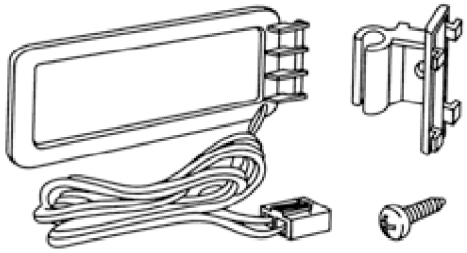

FM indoor antenna... 1pc.

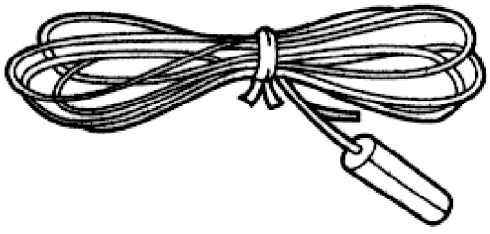

Remote Control Transmitter... 1 pc.

Antenna Plug (EB)... 1 set.



4. Caution of AC Mains Lead

(For "EB" area code model only.)

For your safety, please read the following text carefully.

This appliance is supplied with a moulded three pin mains plug for your safety and convenience.
A 5-ampere fuse is fitted in this plug.
Should the fuse need to be replaced please ensure that the replacement fuse has a rating of 5-ampere and that it is approved by ASTA or BSI to BS1362.

Check for the ASTA mark or the BSI mark on the body of the fuse.

If the plug contains a removable fuse cover you must ensure that it is refitted when the fuse is replaced.
If you lose the fuse cover, the plug must not be used until a replacement cover is obtained.
A replacement fuse cover can be purchased from your local dealer.

CAUTION!
IF THE FITTED MOULDED PLUG IS UNSUITABLE FOR THE SOCKET OUTLET IN YOUR HOME THEN THE FUSE SHOULD BE REMOVED AND THE PLUG CUT OFF AND DISPOSED OFF SAFELY.
THERE IS A DANGER OF SEVERE ELECTRICAL SHOCK IF THE CUT OFF PLUG IS INSERTED INTO ANY 13-AMPERE SOCKET.

If a new plug is to be fitted, please observe the wiring code as shown below.
If in any doubt please consult a qualified electrician.

IMPORTANT
The wires in this mains lead are coloured in accordance with the following code:

Blue:	Neutral
Brown:	Live

As these colours may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:
The wire which is coloured Blue must be connected to the terminal which is marked with the letter N or coloured Black or Blue.

The wire which is coloured Brown must be connected to the terminal which is marked with the letter L or coloured Brown or Red.

WARNING: DO NOT CONNECT EITHER WIRE TO THE EARTH TERMINAL WHICH IS MARKED WITH THE LETTER E, BY THE EARTH SYMBOL ⏚ OR COLOURED GREEN OR GREEN/YELLOW.

THIS PLUG IS NOT WATERPROOF—KEEP DRY.

Before use
Remove the connector cover.

How to replace the fuse
The location of the fuse differ according to the type of AC mains plug (figures A and B). Confirm the AC mains plug fitted and follow the instructions below.
Illustrations may differ from actual AC mains plug.

1. Open the fuse cover with a screwdriver.

Figure A



Figure B



2. Replace the fuse and close or attach the fuse cover.

Figure A



Figure B

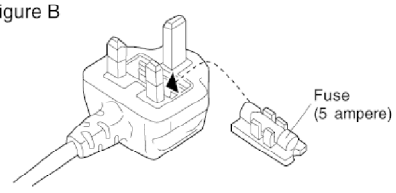

5. Front Panel Controls

5.1. Front Panel

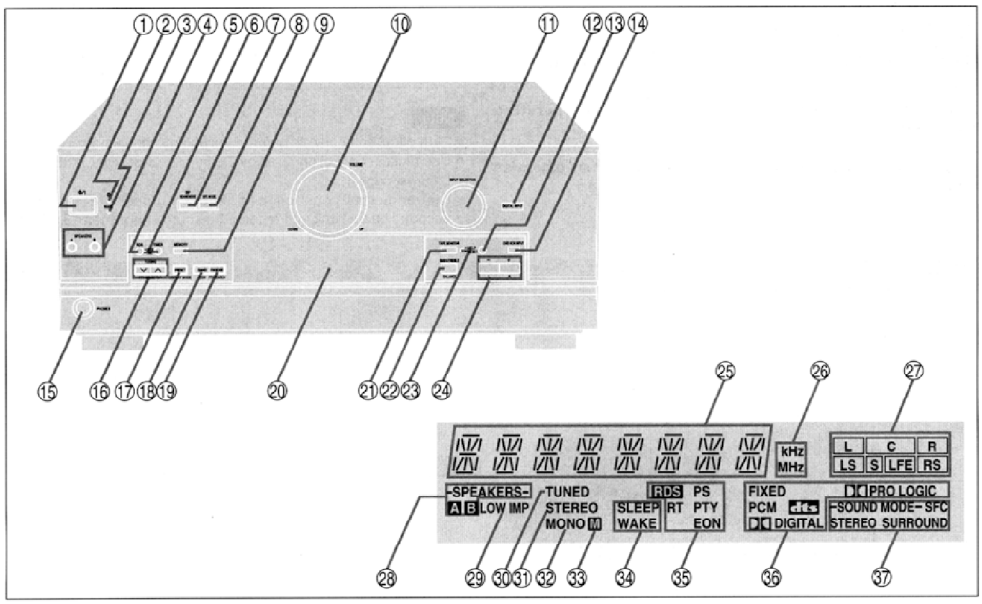

Main unit

① **Standby/on switch** [⏻/I]
Press to switch the unit from on to standby mode or vice versa.
In standby mode, the unit is still consuming a small amount of power.
② **Standby indicator** [⏻]
When the unit is connected to the AC mains supply, this indicator lights up in standby mode and goes out when the unit is turned on.
③ **Wake indicator [WAKE]**
④ **Speaker select buttons [SPEAKERS, A, B]**
⑤ **RDS button [RDS]**
⑥ **Timer button [TIMER, -MODE, –TIME]**
⑦ **DSP sound mode select button [DSP SOUND MODE]**
⑧ **SFC mode select button [SFC MODE]**
⑨ **Memory button [MEMORY]**
⑩ **Volume control [VOLUME]**
⑪ **Input selector [INPUT SELECTOR]**
⑫ **Digital input select button/indicator [DIGITAL INPUT]**
⑬ **Help/reset button [-HELP, –RESET]**
⑭ **DVD 6ch input select button/indicator [DVD 6CH INPUT]**
⑮ **Headphone jack [PHONES]**
⑯ **Tuning/PTY select buttons [TUNING, PTY SELECTOR, ∨, ∧]**
⑰ **Preset channel/display mode button [PRESET, DISPLAY MODE]**
⑱ **Band select/EON button [BAND, EON]**
⑲ **FM mode select/PTY search button [FM MODE, PTY SEARCH]**
⑳ **Display section**
㉑ **Tape monitor button [TAPE MONITOR]**
㉒ **Tone and balance select button [BASS/TREBLE, BALANCE]**
㉓ **Tape monitor indicator**
㉔ **Tone and balance adjust buttons [–, +, L, R]**

Display section

㉕ **Display**
㉖ **Frequency unit indicators [kHz, MHz]**
㉗ **Program format indicators [L, C, R, LS, S, LFE, RS]**
㉘ **Front speaker indicators [-SPEAKERS-, A, B]**
㉙ **Low impedance indicator [LOW IMP]**
㉚ **Tuned indicator [TUNED]**
㉛ **Stereo indicator [STEREO]**
㉜ **Monaural indicator [MONO]**
㉝ **Memory indicator [M]**
㉞ **Timer indicators [SLEEP, WAKE]**
㉟ **RDS indicators [RDS, PS, RT, PTY, EON]**
㊱ **Signal format indicators [FIXED, PCM, DIGITAL, PRO LOGIC]**
㊲ **DSP sound mode indicators [-SOUND MODE-, SFC, STEREO, SURROUND]**

5.2. Remote Control

Buttons ❼, ❾ and ⓮ function in the same way as the controls on the main unit.

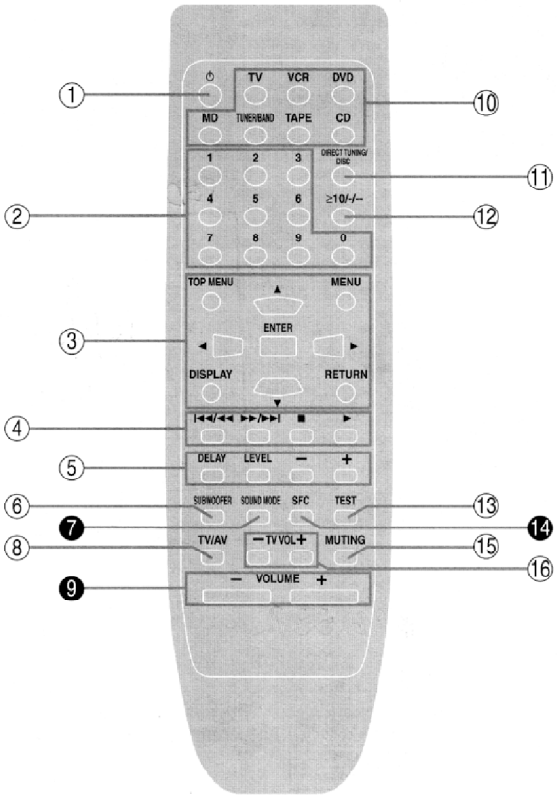

① [⏻]
for turning the equipment on and off
..... RCVR, DISC, TV, VCR, TAPE

② [1, 2, 3, 4, 5, 6, 7, 8, 9, 0]
for selecting numbers ..... RCVR, DISC, TV, VCR

③ [TOP MENU, MENU, DISPLAY, RETURN, ENTER, ▲, ▼, ◀, ▶]
for operating a DVD player ..... DISC

④ [⏮/◀◀, ▶▶/⏭, ■, ▶]
for controlling disc and tape play ..... DISC, VCR, TAPE

⑤ [DELAY, LEVEL, –, +]
for adjusting speaker delay time and output level ..... RCVR

⑥ [SUBWOOFER]
for adjusting subwoofer output level ..... RCVR

❼ [SOUND MODE]
for selecting the DSP sound mode ..... RCVR

⑧ [TV/AV]
for selecting the television's input mode ..... TV

❾ [– VOLUME +]
for adjusting the volume ..... RCVR

⑩ [TV, VCR, DVD, MD (except Australia and New Zealand), TUNER/BAND, TAPE, CD]
for selecting input source and switching the remote control mode ..... RCVR, DISC, TV, VCR, TAPE

⑪ [DIRECT TUNING/DISC]
for selecting radio stations by frequency and disc number
..... RCVR, DISC

⑫ [≥10/-/--]
for entering two digit numbers
..... RCVR, DISC, TV, VCR

⑬ [TEST]
for starting the speaker test signal ..... RCVR

⓮ [SFC]
for selecting SFC mode ..... RCVR

⑮ [MUTING]
for muting the volume ..... RCVR

⑯ [– TV VOL +]
for adjusting the television's volume ..... TV

6. Disassembly and Main Component Replacement Procedures

"ATTENTION SERVICER"
Some chassis components maybe have sharp edges. Be careful when diassembling and servicing.

1. **This section describes procedures for checking the operation of the major printed circuit boards and replacing the main components.**
2. **For reassembly after operation checks or replacement, reverse the respective procedures. / Special reassembly procedures are described only when required.**
3. **Select items from the following index when checks or replacement are required.**

Content

- Disassembly Procedure for each major P.C.B. ..... P.g. 7~9

- Main Component Replacement Procedures

1. **Replacement of the Power IC and Regulator Transistor..... P.g. 10**
2. **Installation of the bottom cover after replacement..... ..... P.g. 11**

6.1. Disassembly Procedure for each major P.C.B.

Step 1 & 2 Unscrew and remove top cabinet as shown.

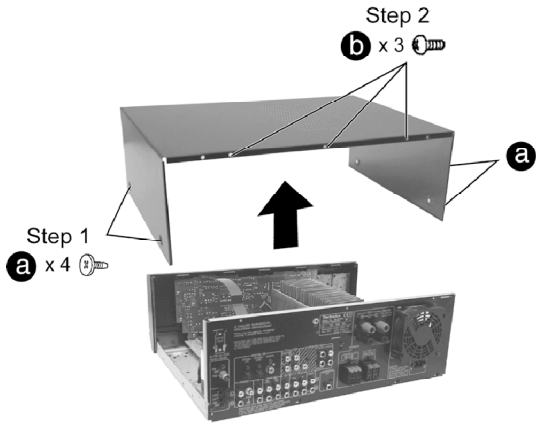

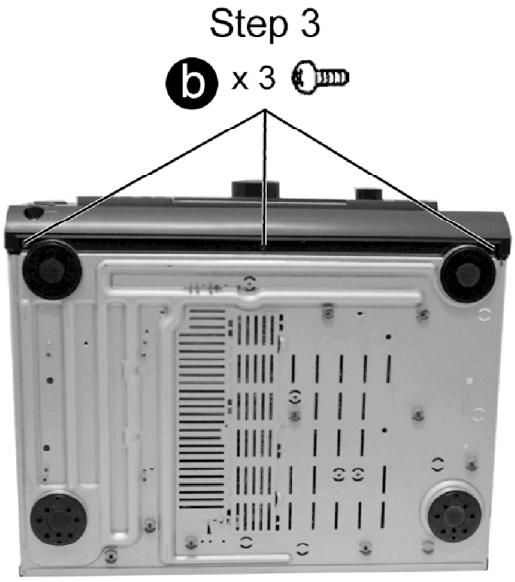

Step 3 Remove all the screws.

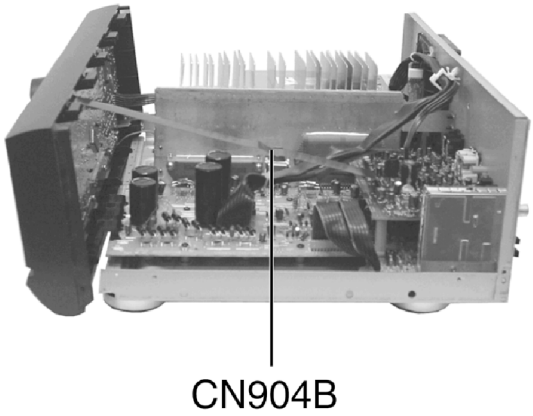

Step 4 Release the connector CN904B.

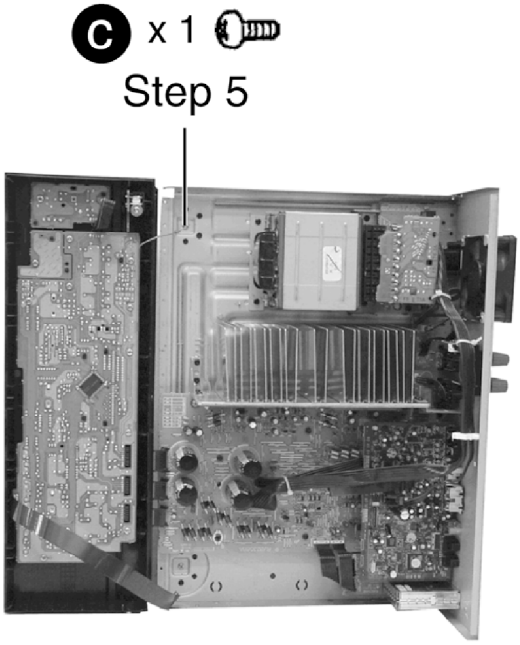

Step 5 Remove the screw.

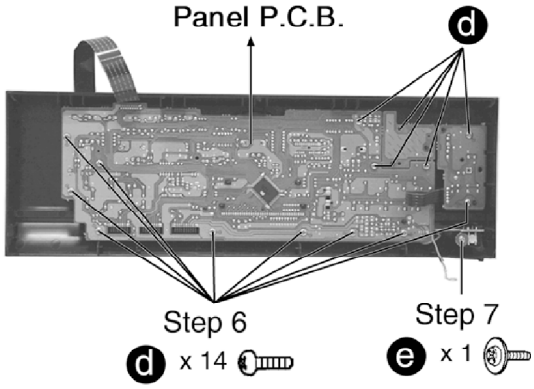

Step 6 & 7 Remove all the screws.

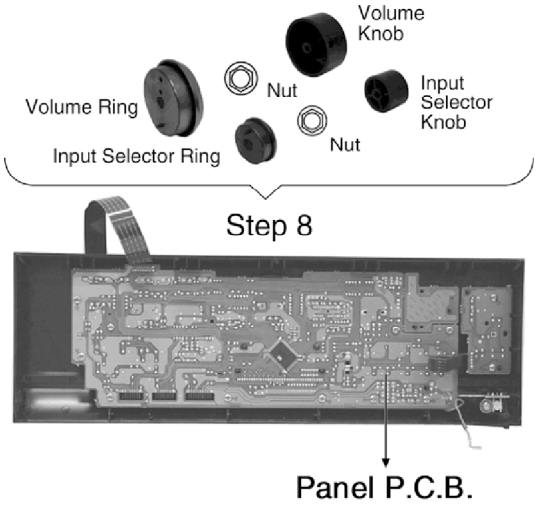

Step 8 Remove all the Selector knob and Volume knob, Unscrew the nut and remove all the Selector ring and Volume ring.

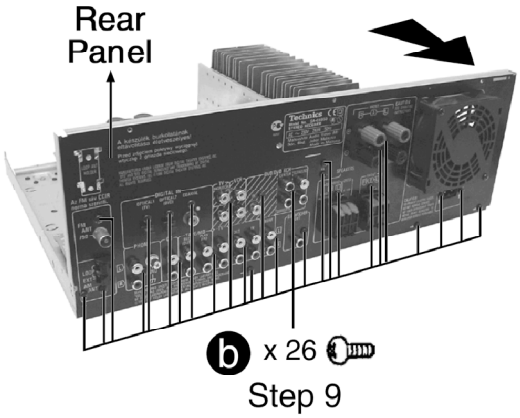

Step 9 Remove all the screws.

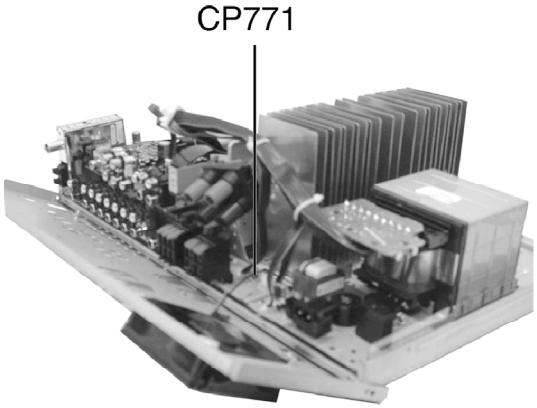

Step 10 Release the connector CP771.

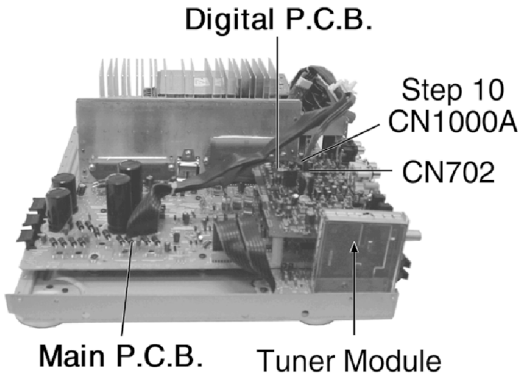

Step 11 Release the connectors CN702 and CN1000A. Pull up the Digital P.C.B. as shown.

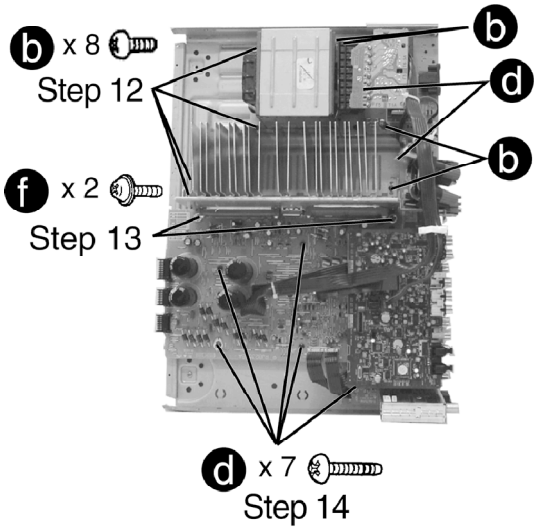

Step 12, 13 & 14 Remove all the screws.

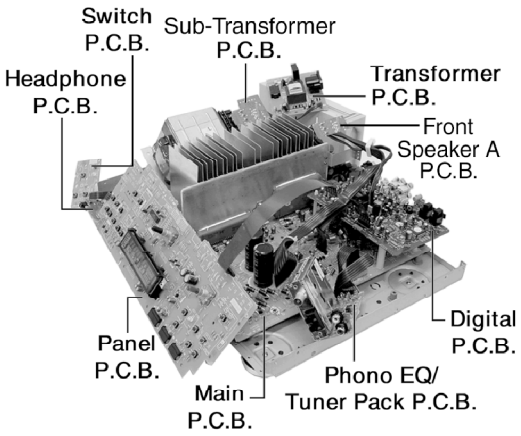

Reconnect all wires and connectors to test all P.C.B..

6.2. Main Component Replacement Procedures

6.2.1. Replacement of the Power IC and Regulator Transistor

Step 1 Remove the top cabinet.

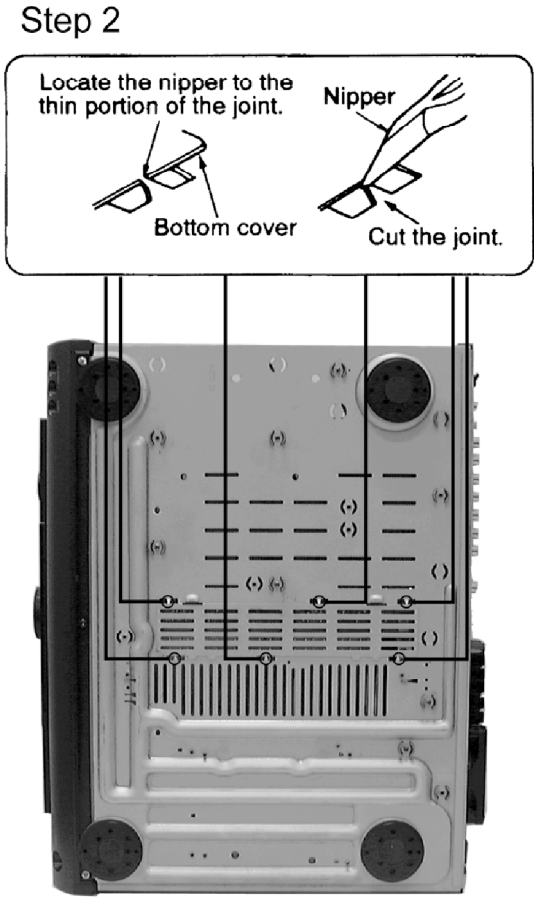

Step 2 Cut the joints as shown below. (6 joints)

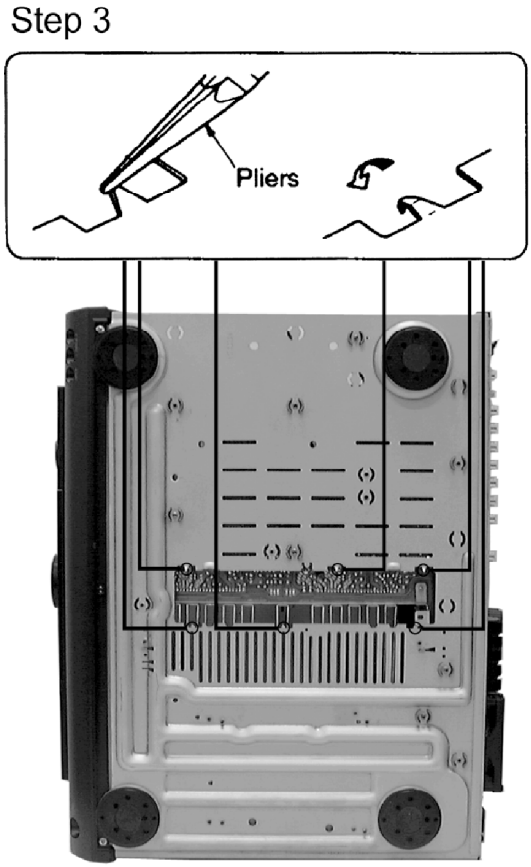

Step 3 Fold the joints. (6 joints)

Step 4 Desolder the terminals of Power IC and Regulator Transistor.

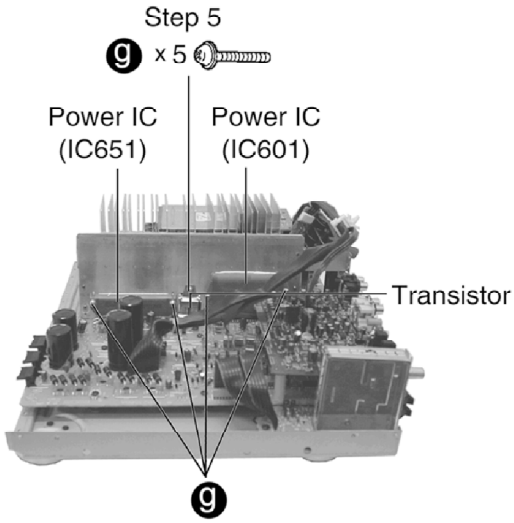

Step 5 Remove all the screws.

6.2.2. Installation of the bottom cover after replacement

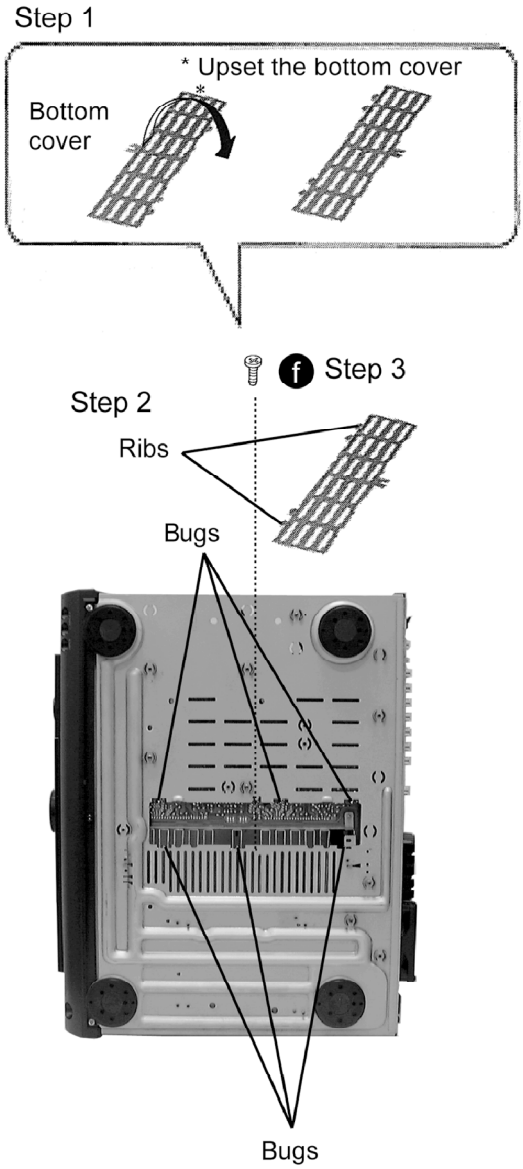

Step 1 Upset the bottom cover.
Step 2 Align the ribs of bottom cover into the bugs.
Step 3 Prepare the screws to fix the bottom cover.

7. Block Diagram

8. Schematic Diagram

(All schematic diagrams may be modified at any time with the development of new technology.)
Notes:

S950	Power Switch
S951	Speaker A Switch
S953	SFC Mode Swtich
S954	Timer Swtich
S955	Memory Switch
S956	FM Mode Switch
S957	Band Switch
S958	Reset Switch
S959	Tuning Up Switch
S960	Tuning Down Switch
S961	Speaker B Switch
S962	Help/RDS Switch
S964	Sound Mode Switch
S965	Digital Switch
S966	DVD 6CH Switch
S967	+/Right Switch
S968	-/Left Switch
S969	Tone/Balance Switch
S970	Tape Monitor Switch
S971	Sub. Woofer Level Switch
VR901	Input Selector Knob
VR902	Volume Knob

- The voltage value and waveforms are the reference voltage of this unit measured by DC electronic voltmeter (high impedance) and oscilloscope on the basis of chassis. Accordingly, there may arise some error in voltage values and waveforms depending upon the internal impedance of the tester or the measuring unit.

< > ...FM

- Importance safety notice:

Components identifed by ⚠ mark have special characteristics important for safety. Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used. When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.

Caution!

IC, LSI and VLSI are sensitive to static electricity.
Secondary trouble can be prevented by taking care during repair.

- Cover the parts boxes made of plastics with aluminium foil.

- Put a conductive mat on the work table.
- Ground the soldering iron.
- Do not touch the pins of IC, LSI or VLSI with fingers directly.

9. Printed Circuit Board

10. Wiring Connection Diagram

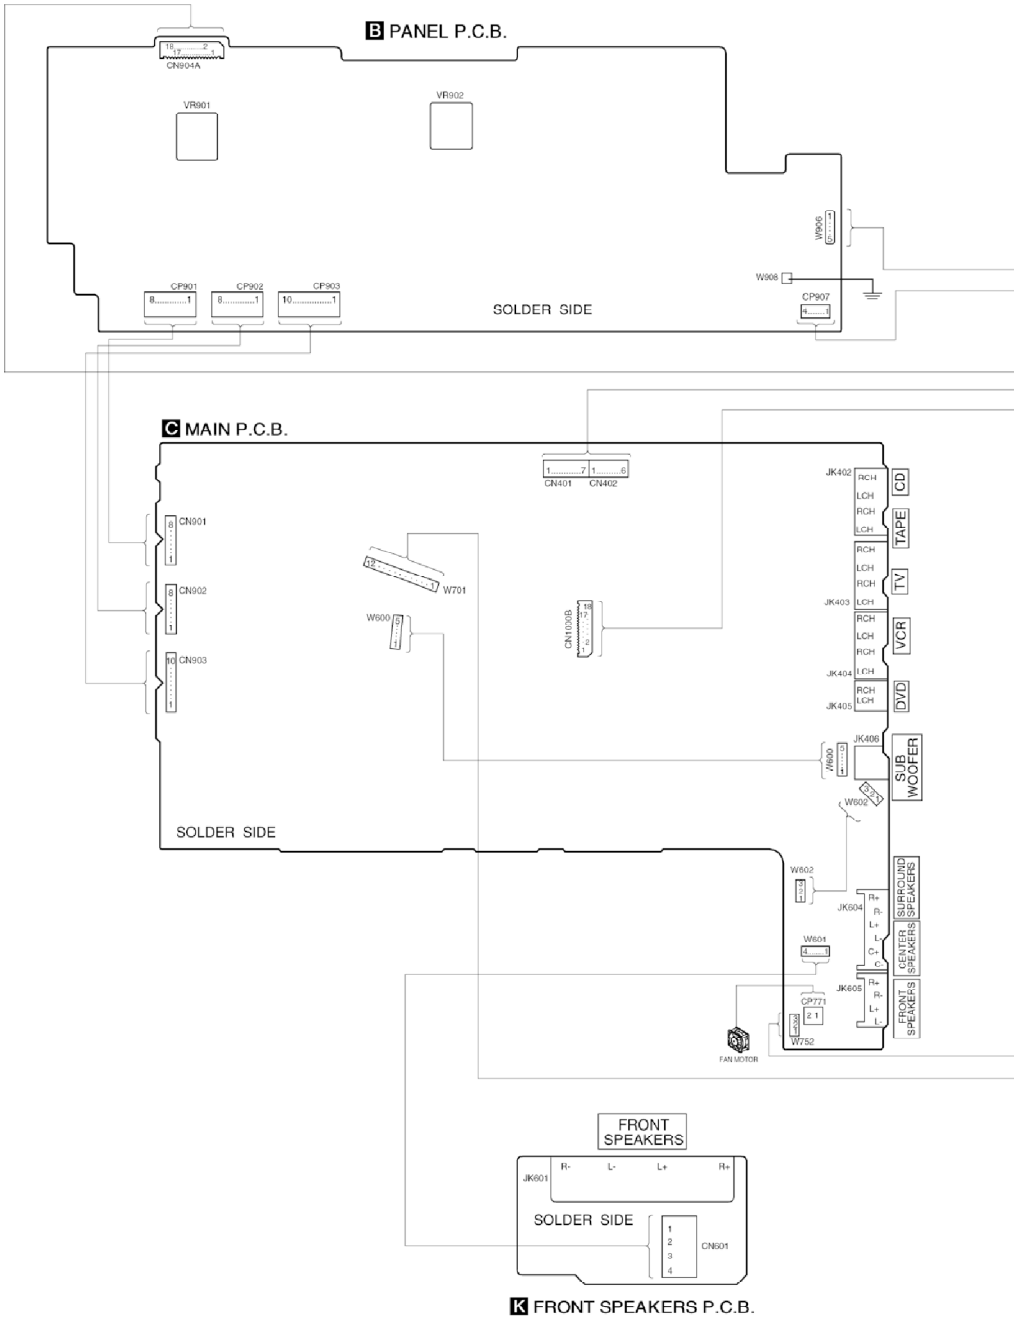
B PANEL P.C.B.
CN904A
VR901
VR902
W906
W908
CP907
CP901
CP902
CP903
SOLDER SIDE
C MAIN P.C.B.
CN401
CN402
CN901
CN902
CN903
W701
W600
CN1030B
JK402
CD
TAPE
TV
JK403
VCR
JK404
JK405
DVD
JK406
SUB WOOFER
W602
SOLDER SIDE
JK604
SURROUND SPEAKERS
CENTER SPEAKERS
JK605
FRONT SPEAKERS
CP771
W752
FAN MOTOR
FRONT SPEAKERS
JK601
R- L- L+ R+
SOLDER SIDE
CN501
K FRONT SPEAKERS P.C.B.

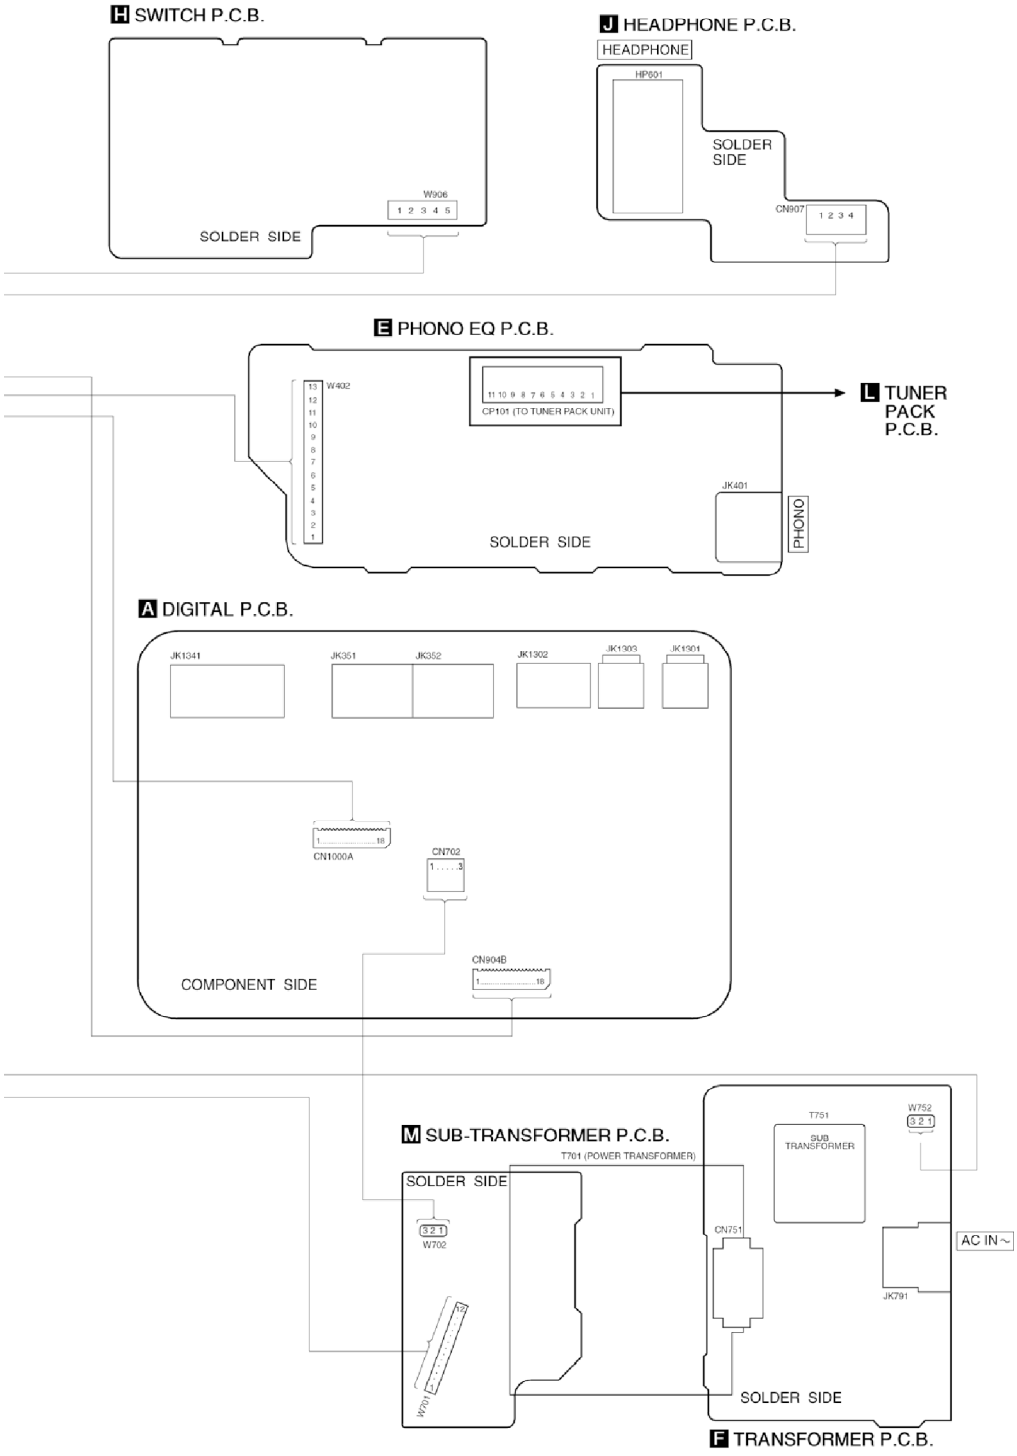

11. Type Illustrations of ICs, Transistors & Diodes

12. Terminal Functions of ICs

- IC901 (C2BBGF000262) MICRO COMPUTER

Pin No.	Mark	I/O	Function
1~2	KEY2~KEY1	I	Key Input 1~2
3	RDS_CLK	-	RDS Data IC CLOCK
4	RDS_DO	-	RDS Data IC - DATA OUT
5	RDS_DI	-	RDS Data IC - DATA IN
6	RDS_CE	-	Control of RDS IC(Not used, open)
7	THRM/OVLD1	I	Thermal/Over load input 1
8	THRM/OVLD2	I	Thermal/Over load input 2
9	SD	I	SD signal detect input
10	IF DATA	I	IF DATA input
11	TNR_CE	O	Tuner control (CE) chip enable signal
12	SFC_ENCD_1	I	SFC mode encoder input 1
13	SFC_ENCD_2	I	SFC mode encoder input 2
14	TC9482_CLK	O	Volume control - CLK
15	TC9482_DT	O	Volume control - DT
16	TC9482_ST	O	Volume control - ST
17	CNVSS	-	-
18	RESET	-	Reset detect terminal
19	DSP_PASS / DSP_OFF	O	DSP signal selector
20	MOS_FET_LED	O	MOS FET LED
21	VSS	I	Ground
22	XIN	I	Crystal oscillator terminal (4 MHz)
23	XOUT	O	Crystal oscillator terminal (4 MHz)
24	VCC	I	Power supply terminal
25	VOL_ENCD_1	O	Volume encoder input 1
26	VOL_ENCD_2	O	Volume encoder input 2
27	CS4226_CDOUT	I	CS4226 serial data input
28	CS4226_CS	I	CS4226 chip selector
29	CS4226_ OVLERR	I	CS4226 overload error input
30	CS49326_ INTREQ	I	CS49326 input request
31	REMOTE	I	Remote control terminal
32	HOLD	I	Blackout detection terminal
33	FRONT_VCR	I	Encoder of surround mode selector input1
34	SEL_ENCD_1	I	Selector encoder for input 1
35	SEL_ENCD_2	I	Selector encoder for input 2

			Z
36	TAPE_LED	O	Tape Selector LED
37	VCR_LED	O	VCR Selector LED
38	TV_LED	O	TV Selector LED
39	DVD_LED	O	DVD Selector LED
40	CD_LED	O	CD Selector LED
41	TUNER_LED	O	TUNER Selector LED
42	PHONO_LED	O	PHONO Selector LED
43	DIGITAL_LED	O	DIGITAL INPUT LED
44	DVD_6CH_LED	O	DVD 6CH LED
45	LIMITTER	O	Power limitter control output
46	TC916x_STB	O	Selector/Tuner (CK) clock signal
47	TC916x_ TNR_CK	O	Selector/Tuner/DVD 6CH SW-CK
48	TC916x_ TNR_DT	O	Selector/Tuner/DVD 6CH SW-DT
49	S/C SP	O	Surround/Center speaker control output
50	SP B	O	Speaker B control output
51	SP A	O	Speaker A control output
52	RELAY	O	Relay control output
53	AF_MUTE	O	Muting control output
54	SUBW_MUTE	O	Subwoofer muting
55	WAKE_LED	-	Wake up timer LED (Not used, open)
56	VCR_MUTE	O	VCR RECORD MUTE
57~59	NOT USED	-	NOT USED
60~78	SEG19~ SEG1	O	FL segment signal output
79~88	DEG1~ DEG10	O	FL digit signal output
89	VEE	-	Power supply for FL driver
90	CS49326_ SCDOUT	O	CS49326 serial data power output
91	CS49326_CDIN	I	CS49326 serial data power input
92	CS49326_CCLK	I	CS49326 serial clock
93	CS49326_CS	I	CS49326 chip selector
94	CS4226_RESET	I	CS4226 reset
95	CS49326_ RESET	I	CS49326 reset
96	INIT_IN	I	Diode input intial settings
97	AVSS	-	Ground
98	VREF	-	Reference voltage
99	VIDEO_B	O	Video selector control output B

100	VIDEO_A	O	Video selector control output A

13. Parts Location and Replacement Parts List

Notes:

- Important safety notice:
Components identified by ⚠ mark have special characteristics important for safety.
Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.
When replacing any of these components, be sure to use only manufacturers's specified parts shown in the parts list.

- The parenthesized indications in the Remarks column specify the areas or color. (Refer to the cover page for area or color.)
Parts without these indications can be used for all areas.

- Capacitor values are in microfarad (μ F) unless specified otherwise, P=Pico-farads(pF); Farads.

- Resistance values are in ohms, unless specified otherwise, 1K= 1,000(ohms).

- The marking (RTL) indicates that the Retention Time is limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws govening part and product retention. After the end of this period, the assembly will no longer be available.

- [M] indicates in the Remarks columns indicates parts that are supplied by MESA.

- The "(SF)" mark denotes the standard part.

- Remote Control Unit: Supply period for three years from terminal of production.

- Reference for O/I book languages are as follows :

Ar : Arabic	Cf : Canadian French	Cz : Czech	Da : Danish
Du : Dutch	En : English	Fr : French	Ge : German
It : Italian	Ko : Korean	Po : Polish	Ru : Russian
Sp : Spanish	Sw : Swedish	Co : Traditional Chinese	Cn : Simplified Chi

13.1. Cabinet

13.1.1. Cabinet Parts Location

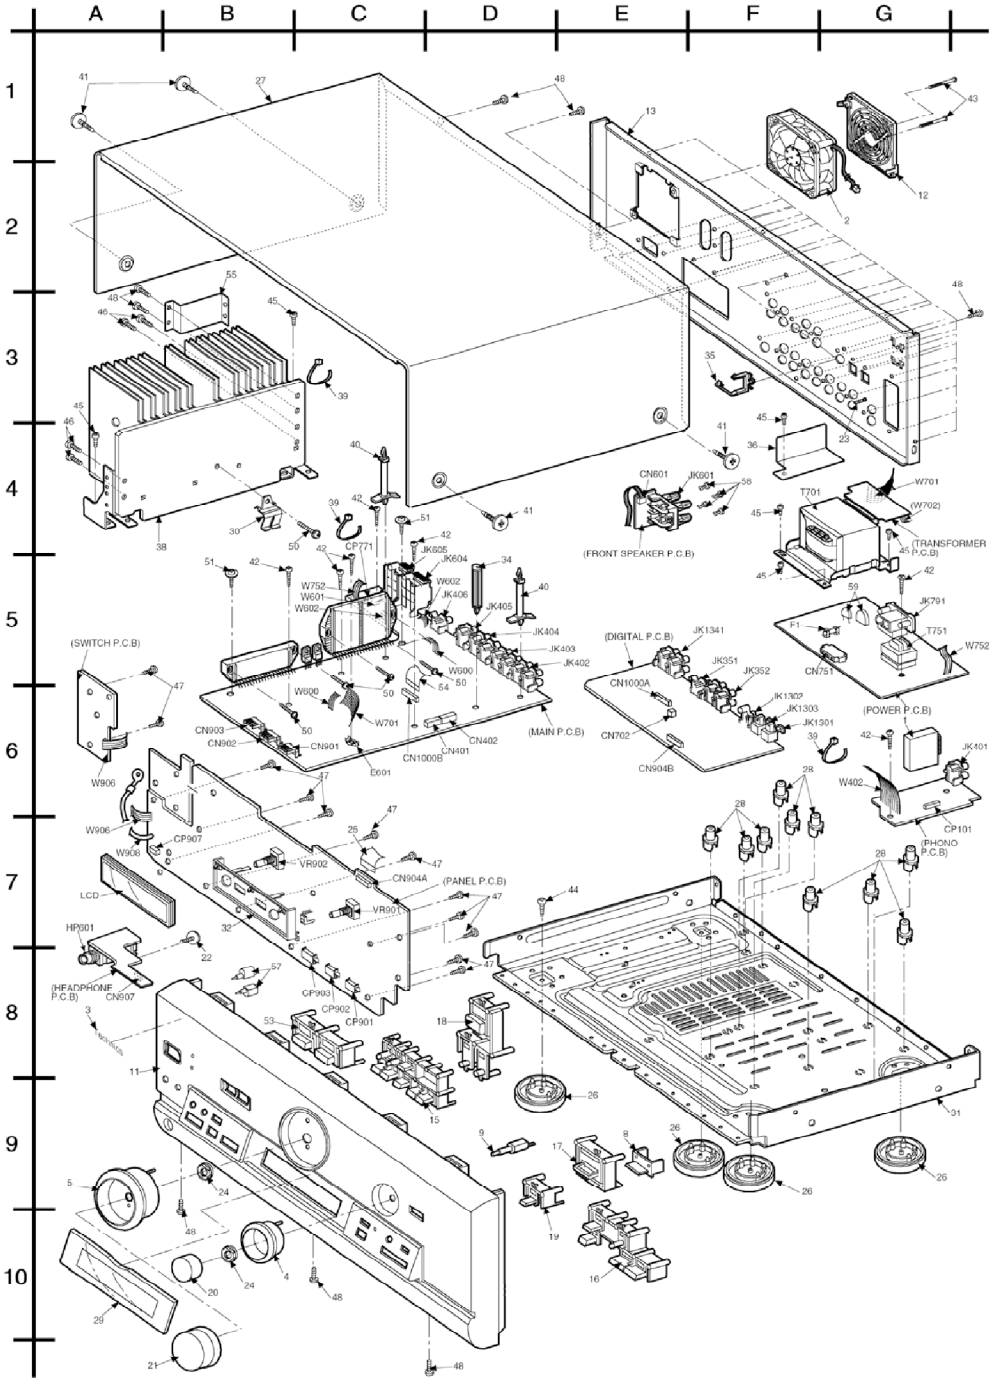

13.1.2. Cabinet Parts List

Ref. No.	Part No.	Part Name & Description	Remarks
		CABINET AND CHASSIS	
1	RAN0002EM	TUNER MODULE	[M]
2	REM0080B	FAN UNIT	[M]
3	RGB0031-A1L	TECH BADGE	[M]
4	RGK0995-2S	SELECTOR RING	[M]
5	RGK1337-S	VOLUME RING	[M]
8	RGL0533-Q	DIGITAL LIGHT GUIDE	[M]
9	RGL0534-Q	MONITOR LIGHT GUIDE	[M]
11	RGP0842A-K	FRONT PANEL	[M]
12	RGQ0231-K	FAN COVER	[M]
13	RGR0306E-A	REAR PANEL	[M]EG E
13	RGR0306E-B	REAR PANEL	[M]EB
15	RGU1941B-K	MODE BUTTON	[M]
16	RGU1942-K	TONE BUTTON	[M]
17	RGU1945-K	DIGITAL BUTTON	[M]
18	RGU1946-K	POWER BUTTON	[M]
19	RGU1947-Q	6CH BUTTON	[M]
20	RGW0280-K	SELECTOR KNOB	[M]
21	RGW0359-K	VOLUME KNOB	[M]
22	RHD26016	SCREW (PHONE JACK)	[M]
23	RHD30070	EARTH TERMINAL	[M]
24	RHN90001	M9 NUT	[M]
25	REE1071	FCC1 (PANEL-DIGITAL)	[M]
26	RKA0079A-A	LEG UNIT	[M]
27	RKM0373C-K	CABINET	[M]
28	RKQ0089A	PCB SUPPORT	[M]
29	RKW0634-Q	FL WINDOW	[M]
30	RMC0158-S	TRANSISTOR HOLDER	[M]
31	RMK0320-1	BOTTOM CHASSIS	[M]
32	RMN0628	FL HOLDER	[M]
34	RMN0648	PCB SUPPORT 2	[M]
35	RMN0649	WIRE CLAMPER	[M]
36	RMV0219	BARRIER	[M]
38	RXX0233	HEAT SINK UNIT	[M]
39	SHR301	WIRE CRAMPER	[M]
40	SHR9683	PCB SUPPORT 1	[M]
41	SNE2129-3	SCREW (CABINET)	[M]
42	XTB3+20JFZ	SCREW	[M]
43	XTB3+35JFZ	SCREW (FAN)	[M]
44	XTB3+6G	SCREW	[M]
45	XTB3+8FFZ	SCREW	[M]
46	XTB3+8JFZ	SCREW	[M]
47	XTBS26+10J	SCREW	[M]
48	XTBS3+8JFZ1	SCREW	[M]
50	XTW3+15T	SCREW	[M]
51	XTWS3+8T	SCREW	[M]
53	RGU1944-S	SFC BUTTON	[M]
54	REE1072	FCC2 (MAIN-DIGITAL)	[M]
55	RMQ1030	HEAT SINK ANGLE	[M]
57	RGL0537-Q	STANDBY LIGHT GUIDE	[M]
58	RMR1165-K	SPEAKER COVER	[M]
59	RMZ0339	ZNR COVER	[M]

13.2. Components Parts List

Ref. No.	Part No.	Part Name & Description	Remarks
		P.C.B.	
	REP3109C-M	MAIN P.C.B./TRANSFORMER P.C.B./SUB-TRANSFORMER P.C.B./ PHONO EQ P.C.B.	[M]RTL / E/EG
	REP3109D-M	MAIN P.C.B./TRANSFORMER P.C.B./SUB-TRANSFORMER P.C.B./ PHONO EQ P.C.B.	[M]RTL / EB
	REP3104E-S	HEADPHONES P.C.B./PANEL P.C.B./SWITCH P.C.B./FRONT SPEAKERS P.C.B.	[M]RTL
	RAN0002EM	TUNER PACK P.C.B.	[M]RTL
	REP3107D-T	DIGITAL P.C.B.	[M]RTL
		INTEGRATED CIRCUITS	
IC351	NJM2279MTE1	IC VIDEO SELECTOR	[M]
IC401	TC9163AN	IC SELECTOR	[M]
IC402	NJM4580DD	IC OP AMP	[M]
IC451	AN6558F	IC OP AMP	[M]
IC601	RSN310R36A-P	IC HIC	[M] ⚠
IC651	RSN313H25-P	IC HIC	[M] ⚠
IC901	C2BBGF000262	IC MICOM	[M]
IC970	LC72720N	IC RDS	[M]
IC1001	CS49326-CLR	IC AC-3/DTS DECODER	[M]
IC1002	CS4226-KQG	IC DIR/DAC/VOL	[M]
IC1003	SN74LV244APW	IC CONVERTER	[M]
IC1004	SN7AHCT244PW	IC CONVERTER	[M]
IC1005	SN74HCU04APW	IC INVERTER	[M]
IC1006	SNAHC1U04DBV	IC OSCILLATOR	[M]
IC1201	NJM2060MTE1	IC OP AMP	[M]
IC1203	NJM4580MTE1	IC OP AMP	[M]
IC1230	NJM2060MTE1	IC OP AMP	[M]
IC1231	NJM4580MTE1	IC OP AMP	[M]
IC1301	NJM2060MTE1	IC OP AMP	[M]
IC1302	NJM2060MTE1	IC OP AMP	[M]
IC1401	TC9162AF	IC SELECTOR	[M]
IC1402	TC9482F	IC VOLUME	[M]
IC1451	NJM4580MTE1	IC OP AMP	[M]
IC1452	NJM2060MTE1	IC OP AMP	[M]
IC1521	NJM2115MTE1	IC OP AMP	[M]
IC1522	NJM2115MTE1	IC OP AMP	[M]
IC1701	BA25BC0FP	IC REGULATOR	[M] ⚠
		TRANSISTORS	
Q351	2SD592AQSTA	TRANSISTOR	[M] ⚠
Q352	2SB621AQSTA	TRANSISTOR	[M] ⚠
Q401	2SK2880CTA	TRANSISTOR	[M]
Q402	2SK2880CTA	TRANSISTOR	[M]
Q551	2SD1915FTA	TRANSISTOR	[M]
Q552	2SD1915FTA	TRANSISTOR	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
Q553	2SD1915FTA	TRANSISTOR	[M]
Q554	2SD1915FTA	TRANSISTOR	[M]
Q555	2SD1915FTA	TRANSISTOR	[M]
Q556	2SD1915FTA	TRANSISTOR	[M]
Q557	2SD1915FTA	TRANSISTOR	[M]
Q560	RVTDTA114EST	TRANSISTOR	[M] ⚠
Q601	RVTDTA143XST	TRANSISTOR	[M]
Q602	RVTDTA143XST	TRANSISTOR	[M]
Q603	RVTDTA143XST	TRANSISTOR	[M]
Q604	RVTDTA114EST	TRANSISTOR	[M] ⚠
Q605	RVTDTA114EST	TRANSISTOR	[M] ⚠
Q651	RVTDTA143XST	TRANSISTOR	[M]
Q652	RVTDTA143XST	TRANSISTOR	[M]
Q701	2SD2374PQAU	TRANSISTOR	[M]EG E ⚠
Q703	2SC1740SQSTA	TRANSISTOR	[M] ⚠
Q704	2SC1740SQSTA	TRANSISTOR	[M] ⚠
Q706	2SC3940AQSTA	TRANSISTOR	[M] ⚠
Q707	2SA1534AQRTA	TRANSISTOR	[M] ⚠
Q708	2SB1548PQAU	TRANSISTOR	[M] ⚠
Q723	RVTDTA114EST	TRANSISTOR	[M] ⚠
Q724	RVTDTC114EST	TRANSISTOR	[M] ⚠
Q725	RVTDTC114YST	TRANSISTOR	[M] ⚠
Q751	RVTDTC143ZST	TRANSISTOR	[M]
Q752	2SC3940AQSTA	TRANSISTOR	[M] ⚠
Q753	2SK2880CTA	TRANSISTOR	[M] ⚠
Q754	RVTDTC114EST	TRANSISTOR	[M] ⚠
Q771	2SA933SQRSTA	TRANSISTOR	[M]
Q772	2SC1740SQSTA	TRANSISTOR	[M]
Q773	2SB621AQSTA	TRANSISTOR	[M]
Q774	RVTDTA113ZST	TRANSISTOR	[M]
Q775	RVTDTA114EST	TRANSISTOR	[M]
Q776	2SC1740SQSTA	TRANSISTOR	[M]
Q777	2SA933SQRSTA	TRANSISTOR	[M]
Q778	2SA933SQRSTA	TRANSISTOR	[M]
Q779	2SA933SQRSTA	TRANSISTOR	[M]
Q780	2SA933SQRSTA	TRANSISTOR	[M]
Q781	2SC1740SQSTA	TRANSISTOR	[M]
Q901	RVTDTC114YST	TRANSISTOR	[M]
Q902	2SA933SQRSTA	TRANSISTOR	[M]
Q903	RVTDTA114EST	TRANSISTOR	[M]
Q1001	DTA114YETL	TRANSISTOR	[M]
Q1681	2SD1915FTA	TRANSISTOR	[M]
Q1682	2SD1915FTA	TRANSISTOR	[M]
Q1701	2SD2137PQTA	TRANSISTOR	[M] ⚠
Q1702	2SD2374PQAU	TRANSISTOR	[M] ⚠
Q1703	2SC1740SSTA	TRANSISTOR	[M] ⚠
		DIODES	

Ref. No.	Part No.	Part Name & Description	Remarks
D351	UDZSTE175R6B	DIODE	[M]
D352	UDZSTE175R6B	DIODE	[M]
D353	1SS355TE17	DIODE	[M]
D354	1SS355TE17	DIODE	[M]
D401	MTZJ7R5CTA	DIODE	[M]
D403	RVD1SS133TA	DIODE	[M]
D404	RVD1SS133TA	DIODE	[M]
D501	RVD1SS133TA	DIODE	[M]
D601	RK306LFU1	DIODE	[M]
D602	RK306LFU1	DIODE	[M]
D605	RVD1SS133TA	DIODE	[M]
D611	RVD1SS133TA	DIODE	[M]
D612	RVD1SS133TA	DIODE	[M]
D613	RVD1SS133TA	DIODE	[M]
D614	RVD1SS133TA	DIODE	[M]
D617	RVD1SS133TA	DIODE	[M]
D618	MTZJ7R5CTA	DIODE	[M]
D651	1N5402BM21	DIODE	[M]
D652	1N5402BM21	DIODE	[M]
D701	1N5402BM21	DIODE	[M] ⚠
D702	1N5402BM21	DIODE	[M] ⚠
D703	1N5402BM21	DIODE	[M] ⚠
D704	1N5402BM21	DIODE	[M] ⚠
D705	MTZJ6R2BTA	DIODE	[M]
D707	MTZJ33DTA	DIODE	[M]
D708	MTZJ16CTA	DIODE	[M]
D721	1N5402BM21	DIODE	[M] ⚠
D722	1N5402BM21	DIODE	[M] ⚠
D723	1N5402BM21	DIODE	[M] ⚠
D724	1N5402BM21	DIODE	[M] ⚠
D725	1N5402BM21	DIODE	[M] ⚠
D726	1N5402BM21	DIODE	[M] ⚠
D727	1N5402BM21	DIODE	[M] ⚠
D728	1N5402BM21	DIODE	[M] ⚠
D731	RVD1SS133TA	DIODE	[M]
D732	RVD1SS133TA	DIODE	[M]
D741	1SR35400V	DIODE	[M] ⚠
D742	1SR35400V	DIODE	[M] ⚠
D743	1SR35400V	DIODE	[M] ⚠
D744	1SR35400V	DIODE	[M] ⚠
D751	1SR35400V	DIODE	[M] ⚠
D752	1SR35400V	DIODE	[M] ⚠
D753	1SR35400V	DIODE	[M] ⚠
D754	1SR35400V	DIODE	[M] ⚠
D755	RVD1SS133TA	DIODE	[M]
D756	MTZJ6R8BTA	DIODE	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
D757	MTZJ16CTA	DIODE	[M]
D768	MTZJ3R3ATA	DIODE	[M]
D769	RVD1SS133TA	DIODE	[M]
D770	RVD1SS133TA	DIODE	[M]
D771	RB721Q40T77	DIODE	[M] ⚠
D772	RB721Q40T77	DIODE	[M] ⚠
D773	MTZJ8R2CTA	DIODE	[M]
D774	RB721Q40T77	DIODE	[M]
D781	RB721Q40T77	DIODE	[M] ⚠
D782	RB721Q40T77	DIODE	[M] ⚠
D901	1SS291TA	DIODE	[M]
D902	RVD1SS133TA	DIODE	[M]
D903	MTZJ5R6BTA	DIODE	[M]
D904	MTZJ3R9ATA	DIODE	[M]
D905	MA167ATA	DIODE	[M]
D908	MA167ATA	DIODE	[M]
D909	MA167ATA	DIODE	[M]
D911	RVD1SS133TA	DIODE	[M]
D912	RVD1SS133TA	DIODE	[M]
D913	RVD1SS133TA	DIODE	[M]
D914	1SS291TA	DIODE	[M]
D938	SLR325MCT31	DIODE	[M]
D939	SLR325MCT31	DIODE	[M]
D940	SLR325YCT31	DIODE	[M]
D942	SLR325YCT31	DIODE	[M]
D943	SLR325VCT31	DIODE	[M]
D944	SLR325MCT31	DIODE	[M]
D970	RVD1SS133TA	DIODE	[M]
D1705	UDZSTE176R2B	DIODE	[M]
		VARIABLE RESISTORS	
VR901	K9AA012A0002	VR INPUT	[M]
VR902	RRV16B24104G	VR VOLUME	[M]
		SWITCHES	
S950	EVQ21405R	SW POWER	[M]
S951	EVQ21405R	SW SPEAKER A	[M]
S953	EVQ21405R	SW SFC MODE	[M]
S954	EVQ21405R	SW TIMER	[M]
S955	EVQ21405R	SW MEMORY	[M]
S956	EVQ21405R	SW FM MODE	[M]
S957	EVQ21405R	SW BAND	[M]
S958	EVQ21405R	SW RESET	[M]
S959	EVQ21405R	SW TUNING UP	[M]
S960	EVQ21405R	SW TUNING DOWN	[M]
S961	EVQ21405R	SW SPEAKER B	[M]
S962	EVQ21405R	SW HELP / RDS	[M]
S964	EVQ21405R	SW SOUND MODE	[M]
S965	EVQ21405R	SW DIGITAL	[M]
S966	EVQ21405R	SW DVD 6CH	[M]
S967	EVQ21405R	SW + / RIGHT	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
S968	EVQ21405R	SW - / LEFT	[M]
S969	EVQ21405R	SW TONE/BALANCE	[M]
S970	EVQ21405R	SW TAPE MONITOR	[M]
S971	EVQ21405R	SW SUB. WOOFER LEVEL	[M]
		CONNECTORS	
CN401	RJS1A6607T1	7P TAPING CONNECTOR	[M]
CN402	RJS1A6606T1	6P TAPING CONNECTOR	[M]
CN601	RJS4T6ZA	4P CONNECTOR	[M]
CN702	RJS1A6603T1	3P TAPING CONNECTOR	[M]
CN751	SJS305-1	3P CONNECTOR	[M]
CN901	RJU003K008M1	BOAD IN CONNECTOR	[M]
CN902	RJU003K008M1	BOAD IN CONNECTOR	[M]
CN903	RJU003K010M1	10P B/B CONNECTOR	[M]
CN904A	RJS2A5618	18P FFC CONNECTOR	[M]
CN904B	RJS2A5618	18P FFC CONNECTOR	[M]
CN907	RJU100W04	4P CONNECTOR	[M]
CN1000A	RJS2A5618	18P FFC CONNECTOR	[M]
CN1000B	RJS2A5618	18P FFC CONNECTOR	[M]
CP101	RJT100W11	11P CONNECTOR	[M]
CP771	SJT3213	CONNECTOR (FAN)	[M]
CP901	RJT003K008M1	8P CONNECTOR	[M]
CP902	RJT003K008M1	8P CONNECTOR	[M]
CP903	RJT003K010M1	10P CONNECTOR	[M]
CP907	RJT100W04	4P CONNECTOR	[M]
		COILS & TRANSFORMERS	
L602	RLQYR73MW-E	CHOKE COIL	[M]
L603	RLQYR73MW-E	CHOKE COIL	[M]
L604	RLQYR73MW-E	CHOKE COIL	[M]
L651	RLQYR73MW-E	CHOKE COIL	[M]
L652	RLQYR73MW-E	CHOKE COIL	[M]
L701	RLQT801M-W	CHOKE COIL	[M] ⚠
L751	RLQB101KTA-Y	CHOKE COIL	[M]
L901	RLQB101KTA-Y	CHOKE COIL	[M]
L970	RLQZP101KT-Y	AXIAL COIL	[M]
L971	RLQZP101KT-Y	AXIAL COIL	[M]
L1001	RLQM2R2KT2-W	CHIP INDUCTOR	[M]
L1002	RLQM2R2KT2-W	CHIP INDUCTOR	[M]
L1003	RLQM2R2KT2-W	CHIP INDUCTOR	[M]
L1004	RLQM2R2KT2-W	CHIP INDUCTOR	[M]
L1303	VLQ0855M1R0T	CHIP INDUCTOR	[M]
L1304	RLQZ150M-0	CHOKE COIL	[M]
T701	RTP1P5B012-V	POWER TRANSFORMER	[M] ⚠
T751	RTP1H5B001	STANDBY TRANSFORMER	[M] ⚠
		COMPONENT COMBINATION	
Z751	ERZV10V511CS	ZENER	[M] ⚠
Z901	B3RAD0000028	REMOTE SENSOR	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
Z1304	BL02RN2R62T4	EMI BEAD CORE	[M]
Z1308	BL02RN2R62T4	EMI BEAD CORE	[M]
		CERAMIC FILTERS	
CF901	RVBCST4R00MT	CERAMIC OSCILLATOR	[M]
		RELAY	
RL601	RSY0013M-0	RELAY	[M] ⚠
RL602	RSY0013M-0	RELAY	[M] ⚠
RL603	RSY0013M-0	RELAY	[M] ⚠
RL604	RSY0013M-0	RELAY	[M] ⚠
RL751	RSY0040M-0	RELAY	[M] ⚠
		OSCILLATORS	
X970	RSXC4M33S02T	CRYSTAL OSCILLATOR	[M]
X1001	RSXB12M2S01T	CRYSTAL OSCILLATOR	[M]
		DISPLAY TUBE	
FL901	RSL0312-F	FL DISPLAY	[M]
		FUSES	
F1	XBA2C25TB0	FUSE	[M] ⚠
F3	XBA2C63TB0	FUSE	[M] ⚠
F4	XBA2C63TB0	FUSE	[M] ⚠
F5	XBA2C10TB0	FUSE	[M] ⚠
		FUSE HOLDERS	
FC701	RJR0169T	FUSE HOLDER	[M]
FC702	RJR0169T	FUSE HOLDER	[M]
FC705	RJR0169T	FUSE HOLDER	[M]
FC706	RJR0169T	FUSE HOLDER	[M]
FC707	RJR0169T	FUSE HOLDER	[M]
FC708	RJR0169T	FUSE HOLDER	[M]
FC709	RJR0169T	FUSE HOLDER	[M]
FC710	RJR0169T	FUSE HOLDER	[M]
		JACKS	
HP601	RJJ63TS01	JK HEADPHONES	[M]
JK351	K4BK01H00001	JK 1P RCA	[M]
JK352	K4BK04H00002	JK 4P RCA	[M]
JK401	K4BK02H00001	JK 2P RCA	[M]
JK402	K4BK04H00001	JK 4P RCA	[M]
JK403	K4BK04H00001	JK 4P RCA	[M]
JK404	K4BK04H00001	JK 4P RCA	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
JK405	K4BK02H00002	JK 2P RCA	[M]
JK406	K2HA101B0003	JK 1P RCA	[M]
JK601	RJH4410	JK SPEAKER	[M]
JK604	RJH5603-8	JK SPEAKER TERMINAL	[M]
JK605	RJR0054-J	JK SPEAKER TERMINAL	[M]
JK791	SJS9236-1	JK AC INLET	[M] ⚠
JK1301	GP1FA550RZ	JK OPTICAL MODULE	[M]
JK1302	SJFD7-9	JK 1P RCA	[M]
JK1303	GP1FA550RZ	JK OPTICAL MODULE	[M]
JK1341	K4BK04H00004	JK RCA TERMINAL	[M]
		EARTH TERMINAL	
E401	SNE1004-2	EARTH TERMINAL	[M]
E601	SNE1004-2	EARTH TERMINAL	[M]
E1301	RSC0551	EARTH ANGLE	[M]
		WIRES	
W402	RWJ1813120SX	WIRE	[M]
W600	RWJ1805250SS	WIRE	[M]
W601	RWJ1804150SX	WIRE	[M]
W602	RWJ1803090SS	WIRE	[M]
W701	RWJ1812520SS	WIRE	[M]
W702	RWJ1803320SX	WIRE	[M]
W752	RWJ1803180SS	WIRE	[M]
W906	RWJ1805150SS	WIRE	[M]
W908	REZ1372	EARTH WIRE	[M]
		RESISTORS	
R351	ERJ3GEYJ750V	75 1/16W	[M]
R352	ERJ3GEYJ750V	75 1/16W	[M]
R353	ERJ3GEYJ750V	75 1/16W	[M]
R354	ERJ3GEYJ750V	75 1/16W	[M]
R355	ERJ3GEYJ103V	10K 1/16W	[M]
R356	ERJ3GEYJ103V	10K 1/16W	[M]
R357	ERJ3GEYJ103V	10K 1/16W	[M]
R358	ERJ3GEYJ102V	1K 1/16W	[M]
R359	ERJ3GEYJ102V	1K 1/16W	[M]
R360	ERD2FCVG220T	22 1/4W	[M]
R361	ERJ3GEYJ182V	1.8K 1/16W	[M]
R362	ERJ3GEYJ182V	1.8K 1/16W	[M]
R363	ERD2FCVG220T	22 1/4W	[M]
R364	ERJ3GEYJ750V	75 1/16W	[M]
R401	ERDS2TJ102T	1K 1/4W	[M]
R402	ERDS2TJ102T	1K 1/4W	[M]
R403	ERDS2TJ102T	1K 1/4W	[M]
R404	ERDS2TJ102T	1K 1/4W	[M]
R405	ERDS2TJ102T	1K 1/4W	[M]
R406	ERDS2TJ102T	1K 1/4W	[M]
R407	ERDS2TJ102T	1K 1/4W	[M]
R408	ERDS2TJ102T	1K 1/4W	[M]
R409	ERDS2TJ102T	1K 1/4W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R410	ERDS2TJ102T	1K 1/4W	[M]
R411	ERDS2TJ102T	1K 1/4W	[M]
R412	ERDS2TJ102T	1K 1/4W	[M]
R413	ERDS2TJ102T	1K 1/4W	[M]
R414	ERDS2TJ102T	1K 1/4W	[M]
R415	ERDS2TJ102T	1K 1/4W	[M]
R416	ERDS2TJ102T	1K 1/4W	[M]
R417	ERDS2TJ473T	47K 1/4W	[M]
R418	ERDS2TJ473T	47K 1/4W	[M]
R419	ERDS2TJ104T	100K 1/4W	[M]
R420	ERDS2TJ104T	100K 1/4W	[M]
R421	ERDS2TJ104T	100K 1/4W	[M]
R422	ERDS2TJ104T	100K 1/4W	[M]
R423	ERDS2TJ102T	1K 1/4W	[M]
R424	ERDS2TJ102T	1K 1/4W	[M]
R425	ERDS2TJ103T	10K 1/4W	[M]
R426	ERDS2TJ103T	10K 1/4W	[M]
R427	ERDS2TJ103T	10K 1/4W	[M]
R435	ERDS2TJ473T	47K 1/4W	[M]
R436	ERDS2TJ102T	1K 1/4W	[M]
R449	ERDS1FVJ560T	56 1/2W	[M]
R450	ERDS1FVJ560T	56 1/2W	[M]
R451	ERDS2TJ224T	220K 1/4W	[M]
R452	ERDS2TJ224T	220K 1/4W	[M]
R453	ERDS2TJ391T	390 1/4W	[M]
R454	ERDS2TJ391T	390 1/4W	[M]
R455	ERDS2TJ563T	56K 1/4W	[M]
R456	ERDS2TJ563T	56K 1/4W	[M]
R457	ERDS2TJ271T	270 1/4W	[M]
R458	ERDS2TJ271T	270 1/4W	[M]
R459	ERDS2TJ680T	68 1/4W	[M]
R460	ERDS2TJ680T	68 1/4W	[M]
R461	ERDS2TJ184T	180K 1/4W	[M]
R462	ERDS2TJ184T	180K 1/4W	[M]
R463	ERDS2TJ123T	12K 1/4W	[M]
R464	ERDS2TJ123T	12K 1/4W	[M]
R465	ERDS2TJ563T	56K 1/4W	[M]
R466	ERDS2TJ563T	56K 1/4W	[M]
R467	ERDS2TJ473T	47K 1/4W	[M]
R468	ERDS2TJ473T	47K 1/4W	[M]
R469	ERDS2TJ102T	1K 1/4W	[M]
R470	ERDS2TJ102T	1K 1/4W	[M]
R485	ERDS2TJ104T	100K 1/4W	[M]
R486	ERDS2TJ102T	1K 1/4W	[M]
R544	ERDS2TJ104T	100K 1/4W	[M]
R545	ERDS2TJ684T	680K 1/4W	[M]
R546	ERDS2TJ104T	100K 1/4W	[M]
R547	ERDS2TJ684T	680K 1/4W	[M]
R548	ERDS2TJ822T	8.2K 1/4W	[M]
R549	ERDS2TJ822T	8.2K 1/4W	[M]
R550	ERDS2TJ822T	8.2K 1/4W	[M]
R551	ERDS2TJ102T	1K 1/4W	[M]
R552	ERDS2TJ102T	1K 1/4W	[M]
R553	ERDS2TJ102T	1K 1/4W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R554	ERDS2TJ102T	1K 1/4W	[M]
R555	ERDS2TJ102T	1K 1/4W	[M]
R556	ERDS2TJ102T	1K 1/4W	[M]
R557	ERDS2TJ102T	1K 1/4W	[M]
R581	ERDS2TJ473T	47K 1/4W	[M]
R582	ERDS2TJ473T	47K 1/4W	[M]
R583	ERDS2TJ473T	47K 1/4W	[M]
R584	ERDS2TJ473T	47K 1/4W	[M]
R585	ERDS2TJ473T	47K 1/4W	[M]
R586	ERDS2TJ473T	47K 1/4W	[M]
R591	ERDS2TJ272T	2.7K 1/4W	[M]
R592	ERDS2TJ272T	2.7K 1/4W	[M]
R593	ERDS2TJ272T	2.7K 1/4W	[M]
R594	ERDS2TJ272T	2.7K 1/4W	[M]
R595	ERDS2TJ272T	2.7K 1/4W	[M]
R596	ERDS2TJ272T	2.7K 1/4W	[M]
R603	ERDS2TJ182T	1.8K 1/4W	[M]
R604	ERDS2TJ182T	1.8K 1/4W	[M]
R605	ERDS2TJ221T	220 1/4W	[M]
R606	ERDS2TJ221T	220 1/4W	[M]
R607	ERDS2TJ563T	56K 1/4W	[M]
R608	ERDS2TJ563T	56K 1/4W	[M]
R609	ERDS2TJ470T	47 1/4W	[M]
R610	ERDS2TJ470T	47 1/4W	[M]
R611	ERDS1FVJ100T	10 1/2W	[M]
R612	ERDS1FVJ100T	10 1/2W	[M]
R613	ERDS2TJ152T	1.5K 1/4W	[M]
R614	ERDS2TJ152T	1.5K 1/4W	[M]
R615	ERDS2TJ681T	680 1/4W	[M]
R616	ERD25FVJ820T	82 1/4W	[M]
R617	ERD25FVJ820T	82 1/4W	[M]
R618	ERD25FVJ820T	82 1/4W	[M]
R619	ERD25FVJ820T	82 1/4W	[M]
R621	ERDS2TJ682T	6.8K 1/4W	[M]
R622	ERDS2TJ682T	6.8K 1/4W	[M]
R623	ERDS2TJ682T	6.8K 1/4W	[M]
R624	ERD25FVJ4R7T	4.7 1/4W	[M]
R625	ERG1SJ101E	100 1W	[M]
R626	ERG1SJ101E	100 1W	[M]
R627	ERG1SJ101E	100 1W	[M]
R628	ERG1SJ101E	100 1W	[M]
R629	ERDS2TJ102T	1K 1/4W	[M]
R630	ERDS2TJ124T	120K 1/4W	[M]
R631	ERDS2TJ154T	150K 1/4W	[M]
R632	ERDS2TJ184T	180K 1/4W	[M]
R633	ERDS2TJ473T	47K 1/4W	[M]
R634	ERDS2TJ274T	270K 1/4W	[M]
R635	ERDS2TJ154T	150K 1/4W	[M]
R637	ERDS2TJ154T	150K 1/4W	[M]
R638	ERDS2TJ154T	150K 1/4W	[M]
R639	ERDS2TJ104T	100K 1/4W	[M]
R640	ERDS2TJ681T	680 1/4W	[M]
R642	ERDS2TJ182T	1.8K 1/4W	[M]
R643	ERDS2TJ563T	56K 1/4W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R644	ERDS1FVJ100T	10 1/2W	[M]
R645	ERDS2TJ470T	47 1/4W	[M]
R647	ERDS2TJ221T	220 1/4W	[M]
R653	ERDS2TJ182T	1.8K 1/4W	[M]
R654	ERDS2TJ182T	1.8K 1/4W	[M]
R655	ERDS2TJ221T	220 1/4W	[M]
R656	ERDS2TJ221T	220 1/4W	[M]
R657	ERDS2TJ563T	56K 1/4W	[M]
R658	ERDS2TJ563T	56K 1/4W	[M]
R661	ERDS1FVJ100T	10 1/2W	[M]
R662	ERDS1FVJ100T	10 1/2W	[M]
R663	ERDS2TJ470T	47 1/4W	[M]
R664	ERDS2TJ470T	47 1/4W	[M]
R671	ERD25FVJ820T	82 1/4W	[M]
R672	ERD25FVJ470T	47 1/4W	[M]
R674	ERD25FVJ4R7T	4.7 1/4W	[M]
R679	ERDS2TJ682T	6.8K 1/4W	[M]
R681	ERDS2TJ184T	180K 1/4W	[M]
R682	ERDS2TJ224T	220K 1/4W	[M]
R683	ERDS2TJ473T	47K 1/4W	[M]
R684	ERDS2TJ274T	270K 1/4W	[M]
R685	ERDS2TJ154T	150K 1/4W	[M]
R687	ERDS2TJ154T	150K 1/4W	[M]
R688	ERDS2TJ154T	150K 1/4W	[M]
R698	ERDS2TJ152T	1.5K 1/4W	[M]
R699	ERDS2TJ152T	1.5K 1/4W	[M]
R705	ERDS2TJ472T	4.7K 1/4W	[M]
R706	ERDS2TJ102T	1K 1/4W	[M]
R707	ERD25FVJ221T	220 1/4W	[M]
R708	ERDS2TJ152T	1.5K 1/4W	[M]
R711	ERDS2TJ752T	7.5K 1/4W	[M]
R712	ERDS2TJ682T	6.8K 1/4W	[M]
R713	ERDS2TJ390T	39 1/4W	[M]
R714	ERDS2TJ390T	39 1/4W	[M]
R720	ERDS2TJ103T	10K 1/4W	[M]
R721	ERDS1FVJ221T	220 1/2W	[M]
R722	ERDS2TJ123T	12K 1/4W	[M]
R723	ERDS1FVJ1R2T	1.2 1/2W	[M]
R724	ERDS1FVJ1R2T	1.2 1/2W	[M]
R725	ERDS2TJ152T	1.5K 1/4W	[M]
R726	ERD25FVJ151T	150 1/4W	[M]
R727	ERD25FVJ151T	150 1/4W	[M]
R728	ERDS2TJ684T	680K 1/4W	[M]
R729	ERDS2TJ684T	680K 1/4W	[M]
R730	ERDS1FVJ100T	10 1/2W	[M]
R755	ERDS2TJ222T	2.2K 1/4W	[M]
R766	ERDS2TJ473T	47K 1/4W	[M]
R767	ERDS2TJ154T	150K 1/4W	[M]
R768	ERDS2TJ102T	1K 1/4W	[M]
R769	ERDS2TJ103T	10K 1/4W	[M]
R770	ERDS2TJ104T	100K 1/4W	[M]
R771	ERDS2TJ104T	100K 1/4W	[M]
R773	ERDS2TJ103T	10K 1/4W	[M]
R774	ERDS2TJ155T	1.5M 1/4W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R775	ERDS2TJ331T	330 1/4W	[M]
R776	ERDS1FVJ220T	22 1/2W	[M]
R777	ERDS2TJ154T	150K 1/4W	[M]
R778	ERDS2TJ472T	4.7K 1/4W	[M]
R779	ERDS2TJ103T	10K 1/4W	[M]
R780	ERDS1FVJ3R9T	3.9 1/2W	[M]
R782	ERDS2TJ390T	39 1/4W	[M]
R784	ERDS2TJ154T	150K 1/4W	[M]
R786	ERDS2TJ154T	150K 1/4W	[M]
R791	ERDS2TJ123T	12K 1/4W	[M]
R792	ERDS2TJ123T	12K 1/4W	[M]
R793	ERDS2TJ123T	12K 1/4W	[M]
R794	ERDS2TJ123T	12K 1/4W	[M]
R795	ERDS2TJ223T	22K 1/4W	[M]
R797	ERDS2TJ223T	22K 1/4W	[M]
R798	ERDS2TJ223T	22K 1/4W	[M]
R799	ERDS2TJ682T	6.8K 1/4W	[M]
R901	ERDS2TJ102T	1K 1/4W	[M]
R902	ERDS2TJ472T	4.7K 1/4W	[M]
R903	ERDS2TJ103T	10K 1/4W	[M]
R904	ERDS2TJ102T	1K 1/4W	[M]
R905	ERDS2TJ104T	100K 1/4W	[M]
R906	ERDS2TJ271T	270 1/4W	[M]
R907	ERDS2TJ121T	120 1/4W	[M]
R908	ERDS2TJ223T	22K 1/4W	[M]
R909	ERDS2TJ223T	22K 1/4W	[M]
R910	ERDS2TJ222T	2.2K 1/4W	[M]
R911	ERDS2TJ222T	2.2K 1/4W	[M]
R912	ERDS2TJ104T	100K 1/4W	[M]
R915	ERDS2TJ101T	100 1/4W	[M]
R916	ERDS2TJ101T	100 1/4W	[M]
R917	ERDS2TJ102T	1K 1/4W	[M]
R918	ERDS2TJ103T	10K 1/4W	[M]
R919	ERDS2TJ103T	10K 1/4W	[M]
R920	ERDS2TJ103T	10K 1/4W	[M]
R921	ERDS2TJ472T	4.7K 1/4W	[M]
R922	ERDS2TJ104T	100K 1/4W	[M]
R923	ERDS2TJ103T	10K 1/4W	[M]
R924	ERDS2TJ103T	10K 1/4W	[M]
R927	ERDS2TJ101T	100 1/4W	[M]
R928	ERDS2TJ101T	100 1/4W	[M]
R929	ERDS2TJ822T	8.2K 1/4W	[M]
R938	ERDS2TJ151T	150 1/4W	[M]
R939	ERDS2TJ271T	270 1/4W	[M]
R940	ERDS2TJ271T	270 1/4W	[M]
R942	ERDS2TJ271T	270 1/4W	[M]
R943	ERDS2TJ271T	270 1/4W	[M]
R946	ERDS2TJ151T	150 1/4W	[M]
R950	ERDS2TJ102T	1K 1/4W	[M]
R951	ERDS2TJ222T	2.2K 1/4W	[M]
R952	ERDS2TJ152T	1.5K 1/4W	[M]
R953	ERDS2TJ182T	1.8K 1/4W	[M]
R954	ERDS2TJ222T	2.2K 1/4W	[M]
R955	ERDS2TJ332T	3.3K 1/4W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R956	ERDS2TJ472T	4.7K 1/4W	[M]
R957	ERDS2TJ682T	6.8K 1/4W	[M]
R958	ERDS2TJ123T	12K 1/4W	[M]
R960	ERDS2TJ102T	1K 1/4W	[M]
R961	ERDS2TJ122T	1.2K 1/4W	[M]
R962	ERDS2TJ152T	1.5K 1/4W	[M]
R963	ERDS2TJ182T	1.8K 1/4W	[M]
R964	ERDS2TJ222T	2.2K 1/4W	[M]
R965	ERDS2TJ332T	3.3K 1/4W	[M]
R966	ERDS2TJ472T	4.7K 1/4W	[M]
R967	ERDS2TJ682T	6.8K 1/4W	[M]
R968	ERDS2TJ123T	12K 1/4W	[M]
R971	ERDS2TJ102T	1K 1/4W	[M]
R972	ERDS2TJ102T	1K 1/4W	[M]
R973	ERDS2TJ102T	1K 1/4W	[M]
R974	ERDS2TJ102T	1K 1/4W	[M]
R975	ERDS2TJ103T	10K 1/4W	[M]
R976	ERDS2TJ104T	100K 1/4W	[M]
R991	ERDS2TJ104T	100K 1/4W	[M]
R992	ERDS2TJ104T	100K 1/4W	[M]
R993	ERDS2TJ104T	100K 1/4W	[M]
R994	ERDS2TJ104T	100K 1/4W	[M]
R1012	ERJ3GEYJ103V	10K 1/16W	[M]
R1013	ERJ3GEYJ103V	10K 1/16W	[M]
R1014	ERJ3GEYJ103V	10K 1/16W	[M]
R1015	ERJ3GEYJ103V	10K 1/16W	[M]
R1016	ERJ3GEYJ103V	10K 1/16W	[M]
R1017	ERJ3GEYJ103V	10K 1/16W	[M]
R1018	ERJ3GEYJ103V	10K 1/16W	[M]
R1019	ERJ3GEYJ103V	10K 1/16W	[M]
R1020	ERJ3GEYJ103V	10K 1/16W	[M]
R1021	ERJ3GEYJ103V	10K 1/16W	[M]
R1022	ERJ3GEYJ472V	4.7K 1/16W	[M]
R1023	ERJ3GEYJ103V	10K 1/16W	[M]
R1024	ERJ3GEYJ472V	4.7K 1/16W	[M]
R1025	ERJ3GEYJ103V	10K 1/16W	[M]
R1026	ERJ3GEYJ330V	33 1/16W	[M]
R1027	ERJ3GEYJ472V	4.7K 1/16W	[M]
R1028	ERJ3GEYJ333V	33K 1/16W	[M]
R1029	ERJ3GEYJ472V	4.7K 1/16W	[M]
R1030	ERJ3GEYJ105V	1M 1/16W	[M]
R1031	ERJ3GEYJ102V	1K 1/16W	[M]
R1032	ERJ3GEYJ330V	33 1/16W	[M]
R1033	ERJ3GEYJ102V	1K 1/16W	[M]
R1034	ERJ3GEYJ102V	1K 1/16W	[M]
R1035	ERJ3GEYJ102V	1K 1/16W	[M]
R1036	ERJ3GEYJ102V	1K 1/16W	[M]
R1037	ERJ3GEYJ104V	100K 1/16W	[M]
R1038	ERJ3GEYJ102V	1K 1/16W	[M]
R1039	ERJ3GEYJ104V	100K 1/16W	[M]
R1040	ERJ3GEYJ102V	1K 1/16W	[M]
R1041	ERJ3GEYJ330V	33 1/16W	[M]
R1042	ERJ3GEYJ330V	33 1/16W	[M]
R1043	ERJ3GEYJ470V	47 1/16W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R1044	ERJ3GEYJ470V	47 1/16W	[M]
R1045	ERJ3GEYJ470V	47 1/16W	[M]
R1046	ERJ3GEYJ102V	1K 1/16W	[M]
R1047	ERJ3GEYJ1R5V	1.5 1/16W	[M]
R1048	ERJ3GEYJ104V	100K 1/16W	[M]
R1049	ERJ3GEYJ102V	1K 1/16W	[M]
R1050	ERJ3GEYJ102V	1K 1/16W	[M]
R1051	ERJ3GEYJ102V	1K 1/16W	[M]
R1052	ERJ3GEYJ102V	1K 1/16W	[M]
R1053	ERJ3GEYJ102V	1K 1/16W	[M]
R1054	ERJ3GEYJ102V	1K 1/16W	[M]
R1055	ERJ3GEYJ102V	1K 1/16W	[M]
R1056	ERJ3GEYJ102V	1K 1/16W	[M]
R1057	ERJ3GEYJ102V	1K 1/16W	[M]
R1058	ERJ3GEYJ102V	1K 1/16W	[M]
R1059	ERJ3GEYJ102V	1K 1/16W	[M]
R1060	ERJ3GEYJ102V	1K 1/16W	[M]
R1061	ERJ3GEYJ102V	1K 1/16W	[M]
R1062	ERJ3GEYJ102V	1K 1/16W	[M]
R1063	ERJ3GEYJ102V	1K 1/16W	[M]
R1064	ERJ3GEYJ331V	330 1/16W	[M]
R1065	ERJ3GEYJ331V	330 1/16W	[M]
R1066	ERJ3GEYJ331V	330 1/16W	[M]
R1067	ERJ3GEYJ331V	330 1/16W	[M]
R1068	ERJ3GEYJ473V	47K 1/16W	[M]
R1069	ERJ3GEYJ100V	10 1/16W	[M]
R1201	ERJ3GEYJ102V	1K 1/16W	[M]
R1202	ERJ3GEYJ473V	47K 1/16W	[M]
R1203	ERJ3GEYJ222V	2.2K 1/16W	[M]
R1204	ERJ3GEYJ183V	18K 1/16W	[M]
R1205	ERJ3GEYJ102V	1K 1/16W	[M]
R1206	ERJ3GEYJ473V	47K 1/16W	[M]
R1207	ERJ3GEYJ473V	47K 1/16W	[M]
R1208	ERJ3GEYJ102V	1K 1/16W	[M]
R1209	ERJ3GEYJ222V	2.2K 1/16W	[M]
R1210	ERJ3GEYJ183V	18K 1/16W	[M]
R1211	ERJ3GEYJ183V	18K 1/16W	[M]
R1212	ERJ3GEYJ332V	3.3K 1/16W	[M]
R1213	ERJ3GEYJ152V	1.5K 1/16W	[M]
R1214	ERJ3GEYJ332V	3.3K 1/16W	[M]
R1215	ERJ3GEYJ332V	3.3K 1/16W	[M]
R1216	ERJ3GEYJ152V	1.5K 1/16W	[M]
R1217	ERJ3GEYJ473V	47K 1/16W	[M]
R1218	ERJ3GEYJ473V	47K 1/16W	[M]
R1219	ERJ3GEYJ332V	3.3K 1/16W	[M]
R1225	ERJ3GEYJ222V	2.2K 1/16W	[M]
R1231	ERJ3GEYJ473V	47K 1/16W	[M]
R1232	ERJ3GEYJ473V	47K 1/16W	[M]
R1233	ERJ3GEYJ473V	47K 1/16W	[M]
R1234	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1235	ERJ3GEYJ102V	1K 1/16W	[M]
R1236	ERJ3GEYJ472V	4.7K 1/16W	[M]
R1237	ERJ3GEYJ101V	100 1/16W	[M]
R1238	ERJ3GEYJ183V	18K 1/16W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R1239	ERJ3GEYJ222V	2.2K 1/16W	[M]
R1240	ERJ3GEYJ102V	1K 1/16W	[M]
R1241	ERJ3GEYJ102V	1K 1/16W	[M]
R1242	ERJ3GEYJ183V	18K 1/16W	[M]
R1243	ERJ3GEYJ222V	2.2K 1/16W	[M]
R1244	ERJ3GEYJ222V	2.2K 1/16W	[M]
R1245	ERJ3GEYJ183V	18K 1/16W	[M]
R1247	ERJ3GEYJ102V	1K 1/16W	[M]
R1248	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1249	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1250	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1251	ERJ3GEYJ182V	1.8K 1/16W	[M]
R1252	ERJ3GEYJ473V	47K 1/16W	[M]
R1260	ERJ3GEYJ104V	100K 1/16W	[M]
R1261	ERJ3GEYJ104V	100K 1/16W	[M]
R1301	ERJ3GEYJ332V	3.3K 1/16W	[M]
R1302	ERJ3GEYJ102V	1K 1/16W	[M]
R1303	ERJ3GEYJ470V	47 1/16W	[M]
R1304	ERJ3GEYJ332V	3.3K 1/16W	[M]
R1305	ERJ3GEYJ102V	1K 1/16W	[M]
R1306	ERJ3GEYJ470V	47 1/16W	[M]
R1307	ERJ3GEYJ151V	150 1/16W	[M]
R1308	ERJ3GEYJ100V	10 1/16W	[M]
R1309	ERJ3GEYJ470V	47 1/16W	[M]
R1310	ERJ3GEYJ100V	10 1/16W	[M]
R1341	ERJ3GEYJ102V	1K 1/16W	[M]
R1342	ERJ3GEYJ102V	1K 1/16W	[M]
R1343	ERJ3GEYJ102V	1K 1/16W	[M]
R1344	ERJ3GEYJ102V	1K 1/16W	[M]
R1345	ERJ3GEYJ104V	100K 1/16W	[M]
R1346	ERJ3GEYJ104V	100K 1/16W	[M]
R1347	ERJ3GEYJ104V	100K 1/16W	[M]
R1348	ERJ3GEYJ104V	100K 1/16W	[M]
R1349	ERJ3GEYJ473V	47K 1/16W	[M]
R1350	ERJ3GEYJ473V	47K 1/16W	[M]
R1351	ERJ3GEYJ473V	47K 1/16W	[M]
R1352	ERJ3GEYJ473V	47K 1/16W	[M]
R1353	ERJ3GEYJ152V	1.5K 1/16W	[M]
R1354	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1355	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1356	ERJ3GEYJ152V	1.5K 1/16W	[M]
R1357	ERJ3GEYJ101V	100 1/16W	[M]
R1358	ERJ3GEYJ472V	4.7K 1/16W	[M]
R1359	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1360	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1361	ERJ3GEYJ152V	1.5K 1/16W	[M]
R1402	ERJ3GEYJ102V	1K 1/16W	[M]
R1403	ERJ3GEYJ102V	1K 1/16W	[M]
R1404	ERJ3GEYJ473V	47K 1/16W	[M]
R1405	ERJ3GEYJ473V	47K 1/16W	[M]
R1406	ERJ3GEYJ473V	47K 1/16W	[M]
R1407	ERJ3GEYJ103V	10K 1/16W	[M]
R1408	ERJ3GEYJ103V	10K 1/16W	[M]
R1409	ERJ3GEYJ103V	10K 1/16W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R1410	ERJ3GEYJ473V	47K 1/16W	[M]
R1411	ERJ3GEYJ473V	47K 1/16W	[M]
R1412	ERJ3GEYJ473V	47K 1/16W	[M]
R1413	ERJ3GEYJ102V	1K 1/16W	[M]
R1414	ERJ3GEYJ102V	1K 1/16W	[M]
R1415	ERJ3GEYJ102V	1K 1/16W	[M]
R1451	ERJ3GEYJ473V	47K 1/16W	[M]
R1452	ERJ3GEYJ182V	1.8K 1/16W	[M]
R1453	ERJ3GEYJ101V	100 1/16W	[M]
R1454	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1455	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1456	ERJ3GEYJ101V	100 1/16W	[M]
R1457	ERJ3GEYJ103V	10K 1/16W	[M]
R1458	ERJ3GEYJ473V	47K 1/16W	[M]
R1459	ERJ3GEYJ392V	3.9K 1/16W	[M]
R1460	ERJ3GEYJ102V	1K 1/16W	[M]
R1461	ERJ3GEYJ473V	47K 1/16W	[M]
R1462	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1463	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1464	ERJ3GEYJ473V	47K 1/16W	[M]
R1465	ERJ3GEYJ102V	1K 1/16W	[M]
R1466	ERJ3GEYJ392V	3.9K 1/16W	[M]
R1467	ERJ3GEYJ102V	1K 1/16W	[M]
R1468	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1469	ERJ3GEYJ682V	6.8K 1/16W	[M]
R1470	ERJ3GEYJ102V	1K 1/16W	[M]
R1480	ERJ3GEYJ104V	100K 1/16W	[M]
R1481	ERJ3GEYJ104V	100K 1/16W	[M]
R1483	ERJ3GEYJ104V	100K 1/16W	[M]
R1484	ERJ3GEYJ104V	100K 1/16W	[M]
R1521	ERJ3GEYJ472V	4.7K 1/16W	[M]
R1522	ERJ3GEYJ223V	22K 1/16W	[M]
R1523	ERJ3GEYJ224V	220K 1/16W	[M]
R1524	ERJ3GEYJ103V	10K 1/16W	[M]
R1525	ERJ3GEYJ103V	10K 1/16W	[M]
R1526	ERJ3GEYJ103V	10K 1/16W	[M]
R1527	ERJ3GEYJ472V	4.7K 1/16W	[M]
R1528	ERJ3GEYJ223V	22K 1/16W	[M]
R1529	ERJ3GEYJ224V	220K 1/16W	[M]
R1530	ERJ3GEYJ103V	10K 1/16W	[M]
R1531	ERJ3GEYJ103V	10K 1/16W	[M]
R1681	ERDS2TJ270T	27 1/4W	[M]
R1682	ERDS2TJ270T	27 1/4W	[M]
R1683	ERDS2TJ270T	27 1/4W	[M]
R1684	ERDS2TJ270T	27 1/4W	[M]
R1685	ERDS2TJ270T	27 1/4W	[M]
R1686	ERDS2TJ270T	27 1/4W	[M]
R1687	ERDS2TJ270T	27 1/4W	[M]
R1688	ERDS2TJ270T	27 1/4W	[M]
R1689	ERDS2TJ270T	27 1/4W	[M]
R1690	ERDS2TJ270T	27 1/4W	[M]
R1691	ERDS2TJ270T	27 1/4W	[M]
R1692	ERDS2TJ270T	27 1/4W	[M]
R1693	ERDS2TJ270T	27 1/4W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R1694	ERDS2TJ270T	27 1/4W	[M]
R1695	ERDS2TJ102T	1K 1/4W	[M]
R1696	ERDS2TJ102T	1K 1/4W	[M]
R1699	ERDS2TJ332T	3.3K 1/4W	[M]
R1701	ERDS1FVJ4R7T	4.7 1/2W	[M]
R1702	ERDS1FVJ4R7T	4.7 1/2W	[M]
R1703	ERJ3GEYJ103V	10K 1/16W	[M]
R1704	ERJ3GEYJ272V	2.7K 1/16W	[M]
R1705	ERJ3GEYJ331V	330 1/16W	[M]
R1706	ERJ3GEYJ331V	330 1/16W	[M]
R1707	ERJ3GEYJ821V	820 1/16W	[M]
R1916	ERJ3GEYJ101V	100 1/16W	[M]
R1928	ERJ3GEYJ101V	100 1/16W	[M]
R1929	ERJ3GEYJ101V	100 1/16W	[M]
R1930	ERJ3GEYJ101V	100 1/16W	[M]
R1931	ERJ3GEYJ101V	100 1/16W	[M]
R1932	ERJ3GEYJ101V	100 1/16W	[M]
R1933	ERJ3GEYJ101V	100 1/16W	[M]
R1934	ERJ3GEYJ101V	100 1/16W	[M]
R1942	ERJ3GEYJ101V	100 1/16W	[M]
R1943	ERJ3GEYJ101V	100 1/16W	[M]
R1945	ERJ3GEYJ101V	100 1/16W	[M]
		CAPACITORS	
C351	ECUV1H470JCV	47P 50V	[M]
C352	ECUV1H470JCV	47P 50V	[M]
C353	ECA1CAK470XB	47 16V	[M]
C354	ECA1CAK470XB	47 16V	[M]
C355	ECA1CAK470XB	47 16V	[M]
C356	ECUVNC104ZFV	0.1 16V	[M]
C357	ECUVNC104ZFV	0.1 16V	[M]
C358	ECA0JAK101XB	100 6.3V	[M]
C359	ECA0JAK101XB	100 6.3V	[M]
C360	ECUV1H103KBV	0.01 50V	[M]
C361	ECA0JAK101XB	100 6.3V	[M]
C362	ECA0JAK101XB	100 6.3V	[M]
C363	ECUV1H103KBV	0.01 50V	[M]
C401	ECA1HAK4R7XB	4.7 50V	[M]
C402	ECA1HAK4R7XB	4.7 50V	[M]
C403	ECBT1H103KB5	0.01 50V	[M]
C404	ECBT1H103KB5	0.01 50V	[M]
C405	ECBT1H101KB5	100P 50V	[M]
C409	ECA1CAK220XB	22 16V	[M]
C410	ECA1CAK220XB	22 16V	[M]
C411	ECBT1H101KB5	100P 50V	[M]
C412	ECBT1H101KB5	100P 50V	[M]
C413	ECA1CAK100XB	10 16V	[M]
C414	ECA1CAK100XB	10 16V	[M]
C415	ECBT1H103KB5	0.01 50V	[M]
C416	ECBT1H103KB5	0.01 50V	[M]
C417	ECA1CAK100XB	10 16V	[M]
C418	ECA1CAK100XB	10 16V	[M]
C421	ECBT1H101KB5	100P 50V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C422	ECBT1H101KB5	100P 50V	[M]
C423	ECBT1H101KB5	100P 50V	[M]
C424	ECBT1H101KB5	100P 50V	[M]
C425	ECBT1H331KB5	330P 50V	[M]
C426	ECBT1H331KB5	330P 50V	[M]
C427	ECBT1H331KB5	330P 50V	[M]
C428	ECBT1H331KB5	330P 50V	[M]
C429	ECBT1H101KB5	100P 50V	[M]
C430	ECBT1H101KB5	100P 50V	[M]
C431	ECBT1H101KB5	100P 50V	[M]
C432	ECBT1H101KB5	100P 50V	[M]
C433	ECBT1H101KB5	100P 50V	[M]
C434	ECBT1H101KB5	100P 50V	[M]
C435	ECBT1H104ZF5	0.1 50V	[M]
C451	ECA1HAK4R7XB	4.7 50V	[M]
C452	ECA1HAK4R7XB	4.7 50V	[M]
C453	ECBT1H100J5	10P 50V	[M]
C454	ECBT1H100J5	10P 50V	[M]
C455	ECBT1H102KB5	1000P 50V	[M]
C456	ECBT1H102KB5	1000P 50V	[M]
C457	ECA1AAK330XB	33 10V	[M]
C458	ECA1AAK330XB	33 10V	[M]
C459	ECFR1E223KR	0.022 25V	[M]
C460	ECFR1E223KR	0.022 25V	[M]
C461	ECFR1E682KR	6800P 25V	[M]
C462	ECFR1E682KR	6800P 25V	[M]
C463	ECA1HAK4R7XB	4.7 50V	[M]
C464	ECA1HAK4R7XB	4.7 50V	[M]
C465	ECBT1H103KB5	0.01 50V	[M]
C466	ECBT1H103KB5	0.01 50V	[M]
C467	ECBT1H103KB5	0.01 50V	[M]
C469	ECBT1H181KB5	180P 50V	[M]
C470	ECBT1H181KB5	180P 50V	[M]
C482	ECA1HAK3R3XB	3.3 50V	[M]
C483	ECBT1H101KB5	100P 50V	[M]
C489	ECA1CAK330XB	33 16V	[M]
C490	ECA1CAK330XB	33 16V	[M]
C499	ECBT1H102KB5	1000P 50V	[M]
C533	ECBT1H104ZF5	0.1 50V	[M]
C534	ECBT1H104ZF5	0.1 50V	[M]
C535	ECBT1H104ZF5	0.1 50V	[M]
C583	ECA1CAK100XB	10 16V	[M]
C584	ECA1CAK100XB	10 16V	[M]
C585	ECA1CAK100XB	10 16V	[M]
C586	ECA1CAK100XB	10 16V	[M]
C601	ECA1JAM330XB	33 63V	[M]
C602	ECA1JAM330XB	33 63V	[M]
C603	ECBT1H821KB5	820P 50V	[M]
C604	ECBT1H821KB5	820P 50V	[M]
C607	ECCR1H180KC5	18P 50V	[M]
C608	ECCR1H180KC5	18P 50V	[M]
C611	ECQV1H104JZ3	0.1 50V	[M]
C612	ECQV1H104JZ3	0.1 50V	[M]
C613	ECQV1H104JZ3	0.1 50V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C614	ECQV1H104JZ3	0.1 50V	[M]
C615	ECBT1H103KB5	0.01 50V	[M]
C616	ECA1HAM470XB	47 50V	[M]
C617	ECEA2AN2R2SB	2.2 100V	[M]
C618	ECBT1H102KB5	1000P 50V	[M]
C621	ECA2AAM330XB	33 100V	[M]
C622	ECA2AAM330XB	33 100V	[M]
C625	ECEA1HN100SB	10 50V	[M]
C626	ECEA1HN100SB	10 50V	[M]
C627	ECKR1H223ZF5	0.022 50V	[M]
C628	ECKR1H223ZF5	0.022 50V	[M]
C629	ECKR1H223ZF5	0.022 50V	[M]
C631	ECKR1H223ZF5	0.022 50V	[M]
C632	ECKR1H223ZF5	0.022 50V	[M]
C635	ECKR1H223ZF5	0.022 50V	[M]
C636	ECKR1H223ZF5	0.022 50V	[M]
C639	ECKR1H102ZF5	1000P 50V	[M]
C640	ECKR1H102ZF5	1000P 50V	[M]
C641	ECA1JAM330XB	33 63V	[M]
C642	ECBT1H821KB5	820P 50V	[M]
C643	ECCR1H180KC5	18P 50V	[M]
C644	ECQV1H104JZ3	0.1 50V	[M]
C645	ECQV1H104JZ3	0.1 50V	[M]
C651	ECA1JAM330XB	33 63V	[M]
C652	ECA1JAM330XB	33 63V	[M]
C653	ECBT1H821KB5	820P 50V	[M]
C654	ECBT1H821KB5	820P 50V	[M]
C657	ECCR1H100KC5	10P 50V	[M]
C658	ECCR1H100KC5	10P 50V	[M]
C661	ECQV1H104JZ3	0.1 50V	[M]
C662	ECQV1H104JZ3	0.1 50V	[M]
C663	ECQV1H104JZ3	0.1 50V	[M]
C664	ECQV1H104JZ3	0.1 50V	[M]
C666	ECA1EAM101XB	100 25V	[M]
C667	ECEA2AN2R2SB	2.2 100V	[M]
C668	ECBT1H102KB5	1000P 50V	[M]
C671	ECA2AAM330XB	33 100V	[M]
C672	ECA2AAM330XB	33 100V	[M]
C685	ECBT1H103KB5	0.01 50V	[M]
C701	ECBT1H103KB5	0.01 50V	[M]
C702	ECQE2104KF3	0.1 250V	[M]
C703	RCE1J472MHSK	4700P 63V	[M] ⚠
C704	RCE1J472MHSK	4700P 63V	[M] ⚠
C705	RCE1V562MHSK	5600P 50V5	[M] ⚠
C706	RCE1V562MHSK	5600P 50V5	[M] ⚠
C707	ECA1VAM101XB	100 50V5	[M]
C708	ECBT1H103KB5	0.01 50V	[M]
C709	ECA1CAK330XB	33 16V	[M]
C710	ECBT1H103KB5	0.01 50V	[M]
C711	ECBT1H103KB5	0.01 50V	[M]
C712	ECA1HAK100XB	10 50V	[M]
C713	ECBT1H103KB5	0.01 50V	[M]
C714	ECA1EAK470XB	47 25V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C715	ECA1CAK101XB	100 16V	[M]
C721	ECQE2104KF3	0.1 250V	[M]
C722	ECQE2104KF3	0.1 250V	[M]
C741	ECQV1H104JZ3	0.1 50V	[M]
C751	ECKWRS102MBC	1000P 400V	[M] ⚠
C752	ECKR1H103ZF5	0.01 50V	[M]
C753	ECA1EAM331XB	330 25V	[M]
C754	ECBT1H103KB5	0.01 50V	[M]
C755	ECA1CAK470XB	47 16V	[M]
C757	ECA1CAK100XB	10 16V	[M]
C758	ECA1CAK101XB	100 16V	[M]
C771	ECA1HAK4R7XB	4.7 50V	[M]
C772	ECA1HAK4R7XB	4.7 50V	[M]
C773	ECBT1H104ZF5	0.1 50V	[M]
C774	ECA0JAK101XB	100 6.3V	[M]
C775	ECA1CAK100XB	10 16V	[M]
C776	ECA1HAK010XB	1 50V	[M]
C777	ECA1CAM221XB	220 16V	[M]
C778	ECA1CAK101XB	100 16V	[M]
C779	ECA1CAK101XB	100 16V	[M]
C780	ECA1CAM471XB	470 16V	[M]
C781	ECBT1H103KB5	0.01 50V	[M]
C901	ECA0JM102B	1000P 6.3V	[M] ⚠
C902	ECBT1H104KB5	0.1 50V	[M]
C903	ECBT1H103KB5	0.01 50V	[M]
C904	ECA0JM102B	1000P 6.3V	[M] ⚠
C905	ECA1HAK010XB	1 50V	[M]
C906	ECA1HAK010XB	1 50V	[M]
C907	ECBT1H103KB5	0.01 50V	[M]
C908	ECBT1H103KB5	0.01 50V	[M]
C909	ECA1HAK220XB	22 50V	[M]
C910	ECA1HAK220XB	22 50V	[M]
C911	ECA1HAK220XB	22 50V	[M]
C912	ECA1HAK220XB	22 50V	[M]
C913	ECA1HAK100XB	10 50V	[M]
C914	ECA1HAK100XB	10 50V	[M]
C915	ECA0JAK101XB	100 6.3V	[M]
C916	ECBT1H103KB5	0.01 50V	[M]
C917	ECA1CAK100XB	10 16V	[M]
C918	ECBT1H471KB5	470P 50V	[M]
C919	ECBT1H471KB5	470P 50V	[M]
C921	ECBT1H331KB5	330P 50V	[M]
C922	ECBT1H331KB5	330P 50V	[M]
C923	ECBT1H331KB5	330P 50V	[M]
C924	ECBT1H331KB5	330P 50V	[M]
C925	ECBT1H331KB5	330P 50V	[M]
C926	ECBT1H331KB5	330P 50V	[M]
C927	ECBT1H331KB5	330P 50V	[M]
C928	ECBT1H331KB5	330P 50V	[M]
C929	ECBT1H331KB5	330P 50V	[M]
C930	ECBT1H331KB5	330P 50V	[M]
C970	ECBT1H102KB5	1000P 50V	[M]
C971	ECA0JAK101XB	100 6.3V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C972	ECBT1H470J5	47P 50V	[M]
C973	ECBT1H470J5	47P 50V	[M]
C974	ECBT1H561KB5	560P 50V	[M]
C975	ECBT1H331KB5	330P 50V	[M]
C976	ECA1CAK100XB	10 16V	[M]
C977	ECBT1H103KB5	0.01 50V	[M]
C978	ECA0JAK101XB	100 6.3V	[M]
C991	ECBT1H101KB5	100P 50V	[M]
C992	ECBT1H101KB5	100P 50V	[M]
C993	ECBT1H101KB5	100P 50V	[M]
C994	ECBT1H101KB5	100P 50V	[M]
C1003	ECA1HAK010XB	1 50V	[M]
C1004	ECA0JAK101XB	100 6.3V	[M]
C1005	ECA0JAK101XB	100 6.3V	[M]
C1006	ECA1EAM331XB	330 25V	[M]
C1007	ECA1HAK2R2XB	2.2 50V	[M]
C1008	ECA0JAK101XB	100 6.3V	[M]
C1009	ECA0JAK101XB	100 6.3V	[M]
C1010	ECA0JAK101XB	100 6.3V	[M]
C1011	ECA0JAK101XB	100 6.3V	[M]
C1024	ECUVNC104ZFV	0.1 16V	[M]
C1025	ECUVNC104ZFV	0.1 16V	[M]
C1026	ECUVNC104ZFV	0.1 16V	[M]
C1027	ECUVNC104ZFV	0.1 16V	[M]
C1028	ECUV1H101KCV	100P 50V	[M]
C1029	ECUVNC104ZFV	0.1 16V	[M]
C1030	ECUV1H471KBV	470P 50V	[M]
C1031	ECUV1E103KBV	0.01 25V	[M]
C1032	ECUVNC104ZFV	0.1 16V	[M]
C1033	ECUV1H220JCV	22P 50V	[M]
C1034	ECUV1H101KCV	100P 50V	[M]
C1035	ECUV1H220JCV	22P 50V	[M]
C1036	ECUV1H101KCV	100P 50V	[M]
C1037	ECUV1H102KBV	1000P 50V	[M]
C1038	ECUV1H102KBV	1000P 50V	[M]
C1039	ECUV1H101KCV	100P 50V	[M]
C1040	ECUVNC104ZFV	0.1 16V	[M]
C1041	ECUVNC104ZFV	0.1 16V	[M]
C1042	ECUV1H102KBV	1000P 50V	[M]
C1043	ECUVNC104ZFV	0.1 16V	[M]
C1044	ECUV1H101KCV	100P 50V	[M]
C1045	ECUV1H101KCV	100P 50V	[M]
C1046	ECUV1H102KBV	1000P 50V	[M]
C1047	ECUV1H102KBV	1000P 50V	[M]
C1048	ECUVNC104ZFV	0.1 16V	[M]
C1049	ECUV1H102KBV	1000P 50V	[M]
C1050	ECUV1H102KBV	1000P 50V	[M]
C1051	ECUV1H152KBV	1500P 50V	[M]
C1052	ECUV1E103KBV	0.01 25V	[M]
C1053	ECUVNC104ZFV	0.1 16V	[M]
C1070	ECA1EPXS470B	47 25V	[M]
C1201	ECUV1H103KBV	0.01 50V	[M]
C1202	ECUV1A224KBV	0.22 10V	[M]
C1203	ECA1CAK330XB	33 16V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C1204	ECUV1H103KBV	0.01 50V	[M]
C1205	ECA1CAK330XB	33 16V	[M]
C1206	ECUV1H472KBV	4700P 50V	[M]
C1207	ECUV1H272JCV	2700P 50V	[M]
C1208	ECUV1H472KBV	4700P 50V	[M]
C1209	ECUV1H272JCV	2700P 50V	[M]
C1210	ECA1CAK330XB	33 16V	[M]
C1211	ECUV1H101KCV	100P 50V	[M]
C1212	ECUV1H101KCV	100P 50V	[M]
C1213	ECUV1H391JCV	390P 50V	[M]
C1214	ECUV1H391JCV	390P 50V	[M]
C1215	ECA1HAK100XB	10 50V	[M]
C1216	ECA1HAK100XB	10 50V	[M]
C1217	ECUV1H103KBV	0.01 50V	[M]
C1218	ECUV1H103KBV	0.01 50V	[M]
C1219	ECA1EAK100XB	10 25V	[M]
C1220	ECA1EAK100XB	10 25V	[M]
C1221	ECUVNC104ZFV	0.1 16V	[M]
C1222	ECA1EAK100XB	10 25V	[M]
C1223	ECUVNC104ZFV	0.1 16V	[M]
C1224	ECQV1H104JZ3	0.1 50V	[M]
C1231	ECA1CAK330XB	33 16V	[M]
C1232	ECUV1H472KBV	4700P 50V	[M]
C1233	ECUV1H472KBV	4700P 50V	[M]
C1234	ECA1CAK330XB	33 16V	[M]
C1235	ECUV1H472KBV	4700P 50V	[M]
C1236	ECA1CAK330XB	33 16V	[M]
C1237	ECUV1H331KBV	330P 50V	[M]
C1238	ECUV1H101KCV	100P 50V	[M]
C1239	ECUV1H272JCV	2700P 50V	[M]
C1240	ECUV1H272JCV	2700P 50V	[M]
C1241	ECUV1H101KCV	100P 50V	[M]
C1242	ECUV1H101KCV	100P 50V	[M]
C1243	ECUV1H272JCV	2700P 50V	[M]
C1244	ECUV1H103KBV	0.01 50V	[M]
C1245	ECUV1H103KBV	0.01 50V	[M]
C1246	ECA1EAK100XB	10 25V	[M]
C1247	ECA1EAK100XB	10 25V	[M]
C1250	ECUV1E223KBV	0.022 25V	[M]
C1251	ECA1CAK330XB	33 16V	[M]
C1252	ECUV1H103KBV	0.01 50V	[M]
C1253	ECUV1H103KBV	0.01 50V	[M]
C1260	ECA1HAK4R7XB	4.7 50V	[M]
C1261	ECA1HAK4R7XB	4.7 50V	[M]
C1280	ECUV1H221KBV	220P 50V	[M]
C1281	ECUVH331KBV	330P 50V	[M]
C1302	ECUV1H103KBV	0.01 50V	[M]
C1303	ECUVNC104ZFV	0.1 16V	[M]
C1305	ECUV1H103KBV	0.01 50V	[M]
C1306	ECUVNC104ZFV	0.1 16V	[M]
C1307	ECUV1H103KBV	0.01 50V	[M]
C1308	ECUVNC104ZFV	0.1 16V	[M]
C1309	ECUVNC104ZFV	0.1 16V	[M]
C1311	ECUVNC104ZFV	0.1 16V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C1312	ECUVNC104ZFV	0.1 16V	[M]
C1313	ECUV1H103KBV	0.01 50V	[M]
C1341	ECUV1H331KBV	330P 50V	[M]
C1342	ECUV1H331KBV	330P 50V	[M]
C1343	ECUV1H331KBV	330P 50V	[M]
C1344	ECUV1H331KBV	330P 50V	[M]
C1345	ECA1HAK4R7XB	4.7 50V	[M]
C1346	ECA1HAK4R7XB	4.7 50V	[M]
C1347	ECA1HAK4R7XB	4.7 50V	[M]
C1348	ECA1HAK4R7XB	4.7 50V	[M]
C1349	ECUV1H221KBV	220P 50V	[M]
C1350	ECUV1H221KBV	220P 50V	[M]
C1351	ECUV1H221KBV	220P 50V	[M]
C1352	ECUV1H221KBV	220P 50V	[M]
C1401	ECA1HAK4R7XB	4.7 50V	[M]
C1402	ECA1HAK4R7XB	4.7 50V	[M]
C1403	ECUV1H103KBV	0.01 50V	[M]
C1404	ECUV1H103KBV	0.01 50V	[M]
C1405	ECA1CAK330XB	33 16V	[M]
C1406	ECA1CAK330XB	33 16V	[M]
C1407	ECA1CAK330XB	33 16V	[M]
C1408	ECUV1H101KCV	100P 50V	[M]
C1409	ECA1CAK330XB	33 16V	[M]
C1410	ECA1EAK470XB	47 25V	[M]
C1411	ECA1EAK470XB	47 25V	[M]
C1412	ECUVNC104ZFV	0.1 16V	[M]
C1413	ECUVNC104ZFV	0.1 16V	[M]
C1414	ECA1CAK330XB	33 16V	[M]
C1415	ECA1CAK330XB	33 16V	[M]
C1451	ECA1HAK4R7XB	4.7 50V	[M]
C1452	ECUV1H470JCV	47P 50V	[M]
C1453	ECUV1H470JCV	47P 50V	[M]
C1454	ECA1HAK4R7XB	4.7 50V	[M]
C1455	ECUV1H151JCV	150P 50V	[M]
C1456	ECUV1H221KBV	220P 50V	[M]
C1457	ECA1CAK330XB	33 16V	[M]
C1458	ECA1CAK330XB	33 16V	[M]
C1459	ECUV1H151JCV	150P 50V	[M]
C1460	ECUV1H221KBV	220P 50V	[M]
C1480	ECA1HAK4R7XB	4.7 50V	[M]
C1481	ECA1HAK4R7XB	4.7 50V	[M]
C1483	ECA1HAK4R7XB	4.7 50V	[M]
C1484	ECA1HAK4R7XB	4.7 50V	[M]
C1521	ECEA1CKN100B	10 16V	[M]
C1522	ECEA1CKN100B	10 16V	[M]
C1523	ECUV1H391JCV	390P 50V	[M]
C1524	ECA1CAK100XB	10 16V	[M]
C1525	ECUV1H151JCV	150P 50V	[M]
C1526	ECA1CAK100XB	10 16V	[M]
C1527	ECA1CAK100XB	10 16V	[M]
C1528	ECUV1H103KBV	0.01 50V	[M]
C1529	ECEA1CKN100B	10 16V	[M]
C1530	ECEA1CKN100B	10 16V	[M]
C1531	ECUV1H391JCV	390P 50V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C1532	ECA1CAK100XB	10 16V	[M]
C1533	ECUV1H151JCV	150P 50V	[M]
C1681	ECBT1H103KB5	0.01 50V	[M]
C1682	ECBT1H103KB5	0.01 50V	[M]
C1683	ECBT1C332KR5	3300P 16V	[M]
C1684	ECBT1C332KR5	3300P 16V	[M]
C1685	ECBT1H103KB5	0.01 50V	[M]
C1701	ECA1CAK101XB	100 16V	[M]
C1702	ECA1AM332E	3300 10V	[M] ⚠
C1703	ECUV1H103KBV	0.01 50V	[M]
C1704	ECA1CAK100XB	10 16V	[M]
C1705	ECA1CAK220XB	22 16V	[M]
C1706	ECUV1H391JCV	390P 50V	[M]
C1801	ECUVNC104ZFV	0.1 16V	[M]
C1802	ECUVNC104ZFV	0.1 16V	[M]
C1909	ECUV1H472KBV	4700P 50V	[M]
C1910	ECUVNC104ZFV	0.1 16V	[M]
C1911	ECUV1H102KBV	1000P 50V	[M]

13.3. Packing Materials & Accessories Parts List

Ref. No.	Part No.	Part Name & Description	Remarks
		PACKING MATERIALS	
P1	RPG5224	PACKING CASE	[M]
P2	RPN1384	POLYFOAM	[M]
P3	RPFX0005	MIRAMAT BAG	[M]
		ACCESSORIES	
A1	EUR7702030	REMOTE CONTROL	[M]
A1-1	UR64EC2337D	R/C BATTERY COVER	[M]
A2	RJA0019-2K	AC CORD (SF)	[M]EG E ⚠
A2	VJA0733	AC CORD (SF)	[M]EB ⚠
A3	RQT5809-R	O/I BOOK FOR REMOTE (Cz/Po/Ru/Sp)	[M]E
A3	RQT5810-D	O/I BOOK FOR REMOTE (Sw/Da/Du/Fr/It/Ge)	[M]EG
A3	RQT5812-B	O/I BOOK FOR REMOTE (En)	[M]EB E
A3	RQT5815-R	O/I BOOK (Cz/Po/Ru/Sp)	[M]E
A3	RQT5816-D	O/I BOOK (Fr/It/Ge)	[M]EG
A3	RQT5817-H	O/I BOOK (Sw/Da/Du)	[M]EG
A3	RQT5818-B	O/I BOOK (En)	[M]EB E
A4	RSA0007-L	FM ANTENNA WIRE	[M]
A5	RSA0012	AM LOOP ANT	[M]
A6	SJP9009	ANT ADAPTER	[M]EB

13.4. Packaging

ACCESSORY CASE

A1 : REMOTE CONTROL

A2 : AC CORD

A3 : O/I BOOK

A4 : FM ANTENNA WIRE

A5 : AM LOOP ANTENNA
A6 : ANTENNA ADAPTER

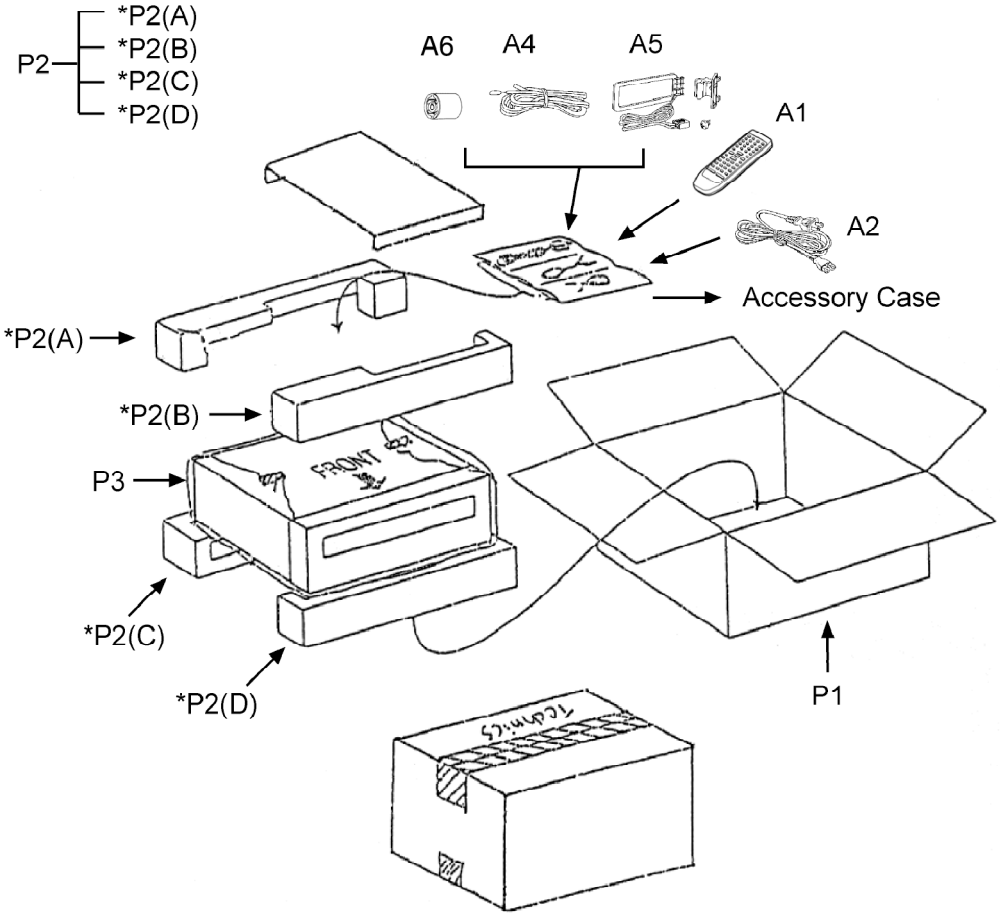

/ Printed in Singapore / M010300001FLE/H/C/J/D/N

A DIGITAL P.C.B. (REP3107D-T) (SIDE A)

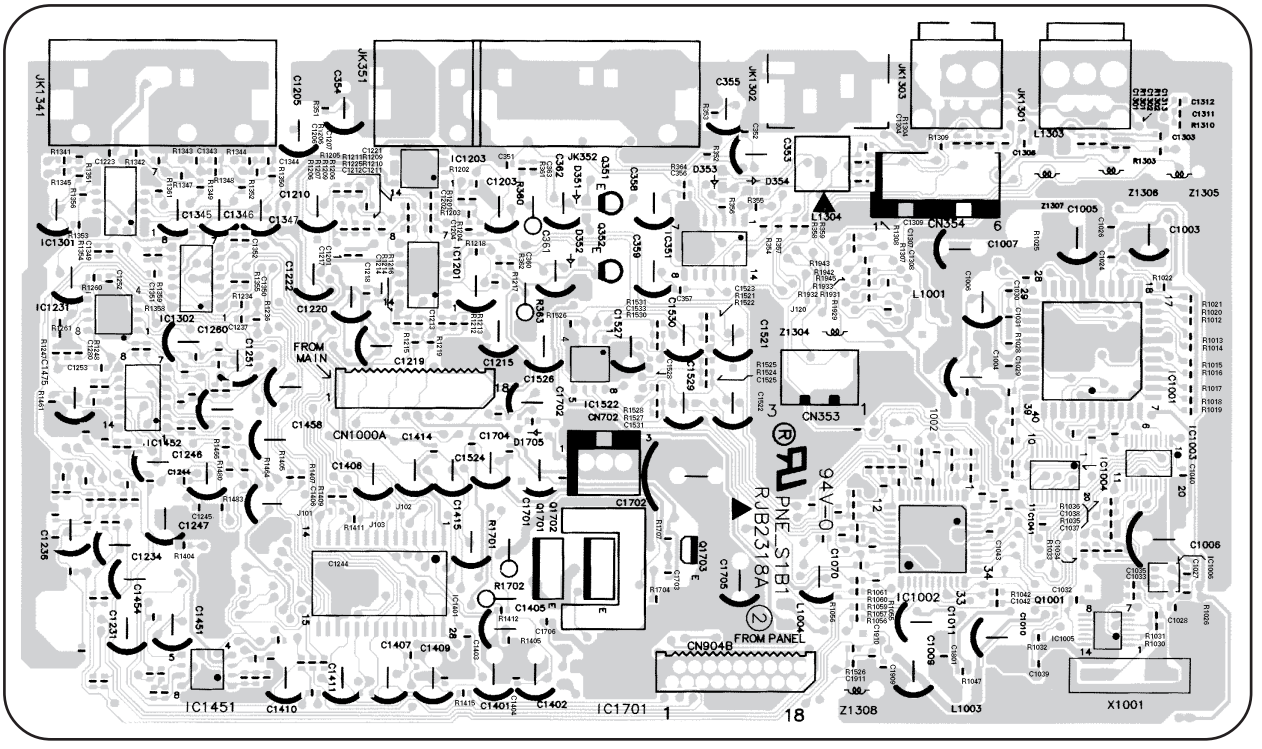

A DIGITAL P.C.B. (REP3107D-T) (SIDE B)

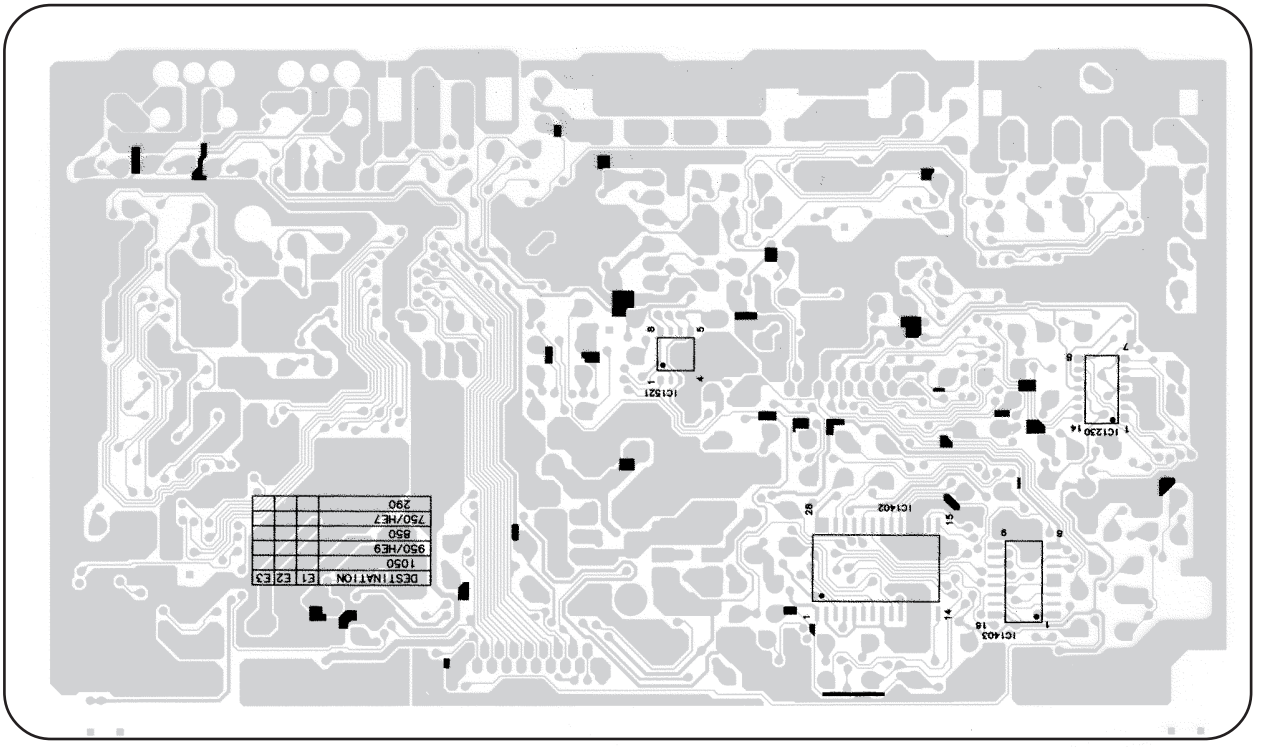

C MAIN P.C.B. (REP3109C-M...E/EG)
(REP3109D-M...EB)

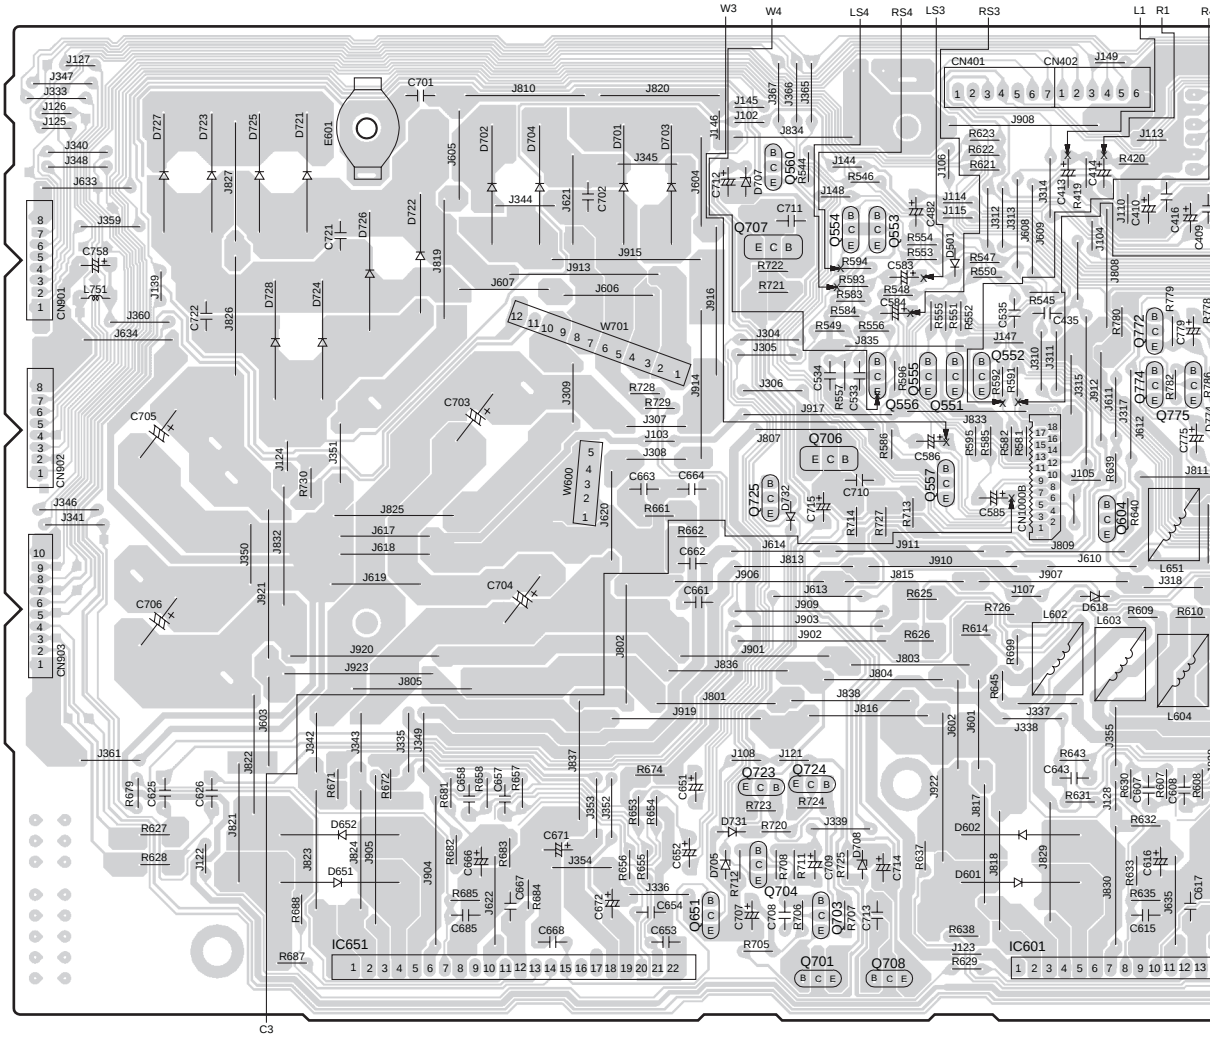

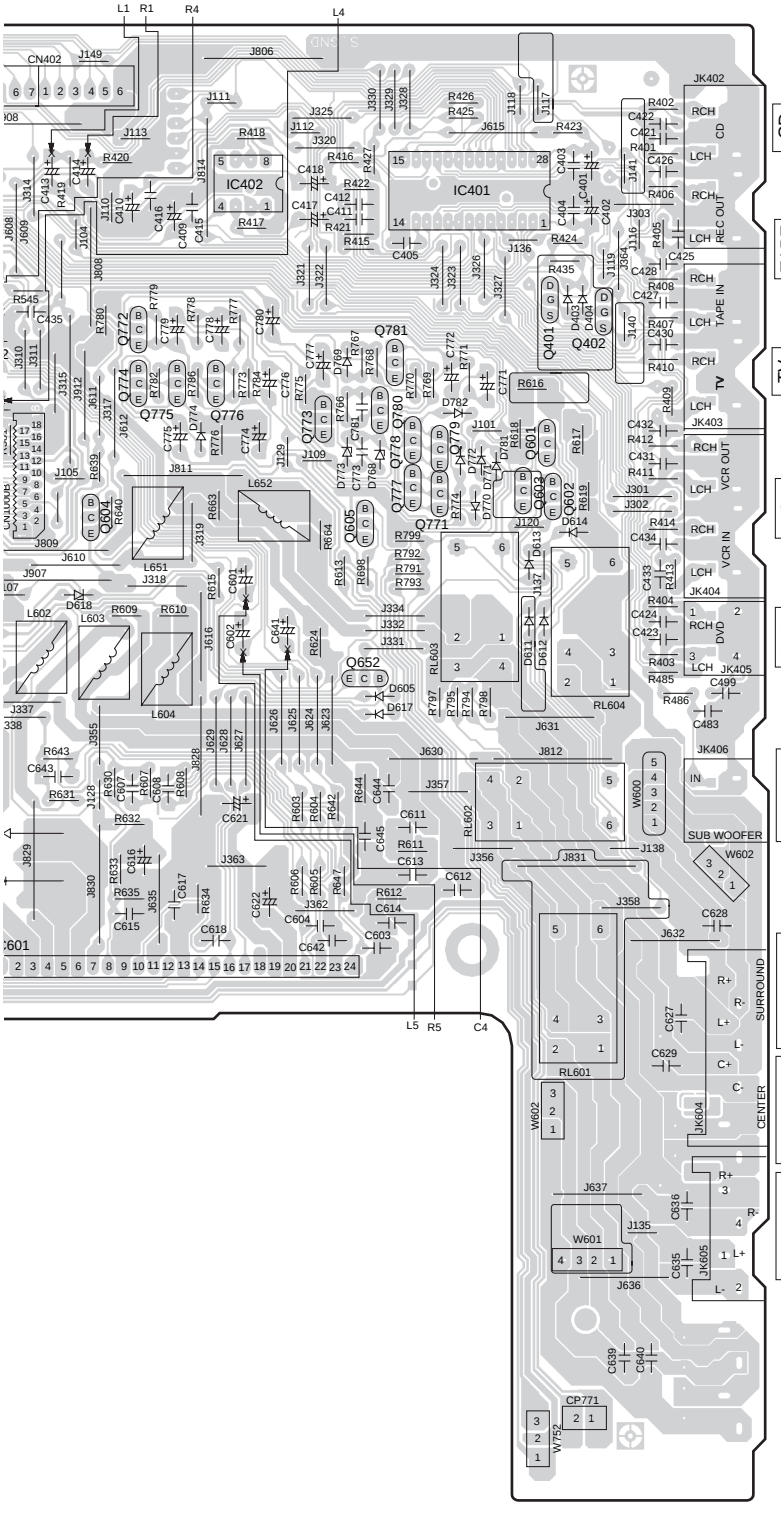
G
H
I
J
K
L
M
CD
TAPE
TV
VCR
DVD
SUB WOOFER
SURROUND SPEAKERS
CENTER SPEAKERS
FRONT SPEAKERS
IC401
IC402
Q401
Q402
Q771
Q772
Q773
Q774
Q775
Q776
Q777
Q778
Q779
Q780
Q781
Q601
Q602
Q603
Q604
Q605
Q652
RL601
RL602
RL603
RL604
CN402
JK402
JK403
JK404
JK405
JK406
JK604
JK605
W600
W601
W602
W752
CP771

B PANEL P.C.B. (REP3104E-S)

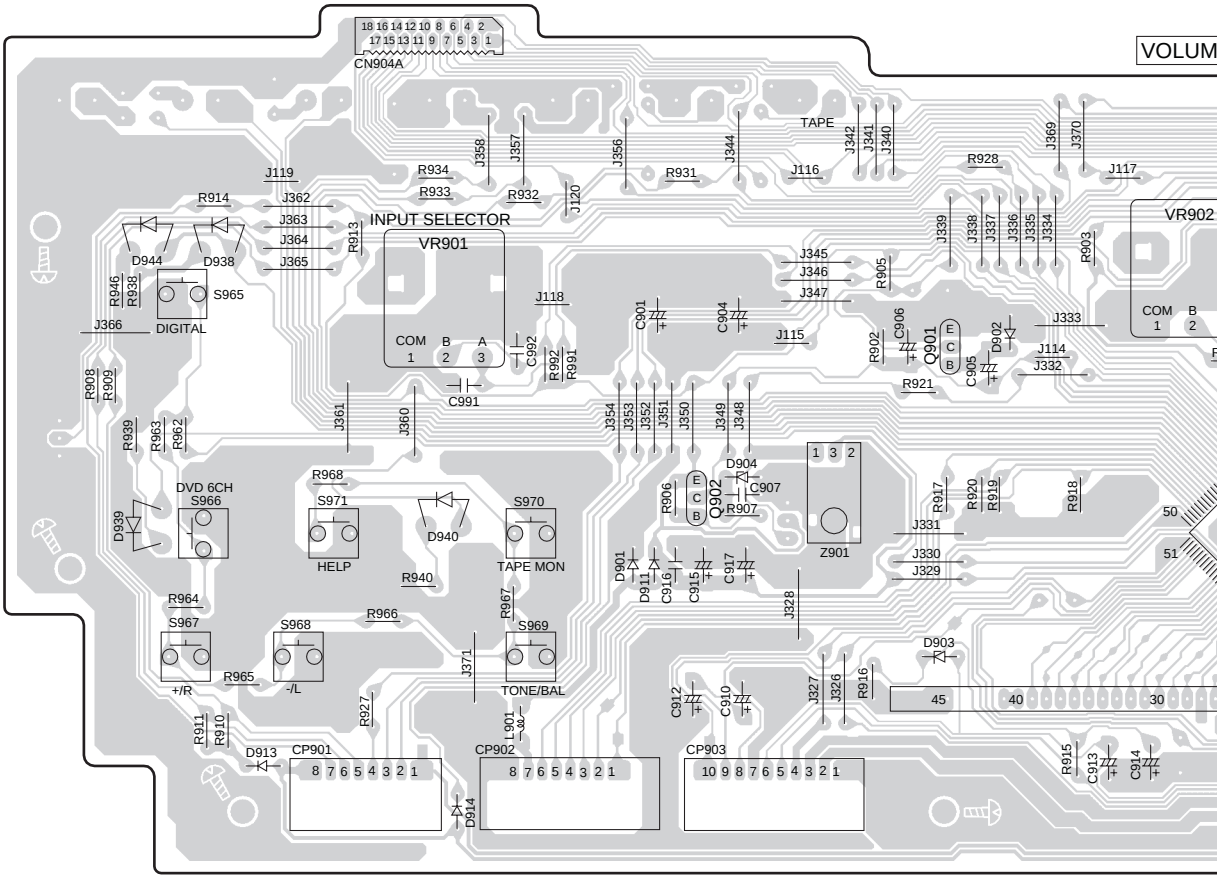

G H I J K L M

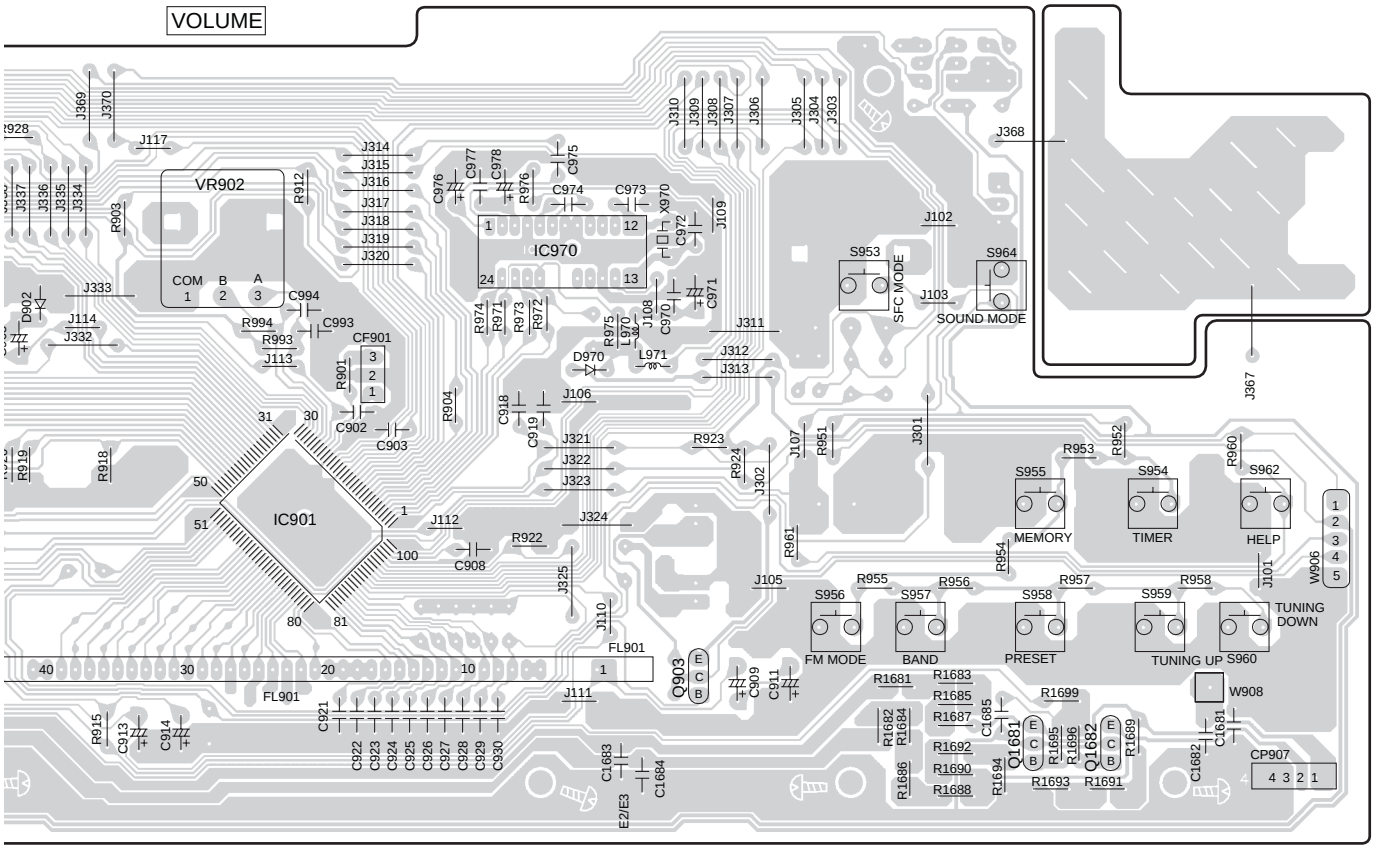

E PHONO EQ P.C.B. (REP3109C-M...E/EG) (REP3109D-M...EB)

L TUNER PACK P.C.B. (RAN0002EM)

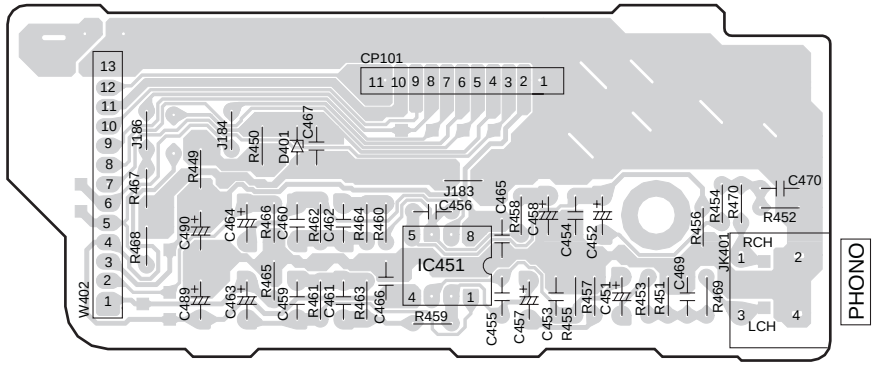

H SWITCH P.C.B. (REP3104E-S)

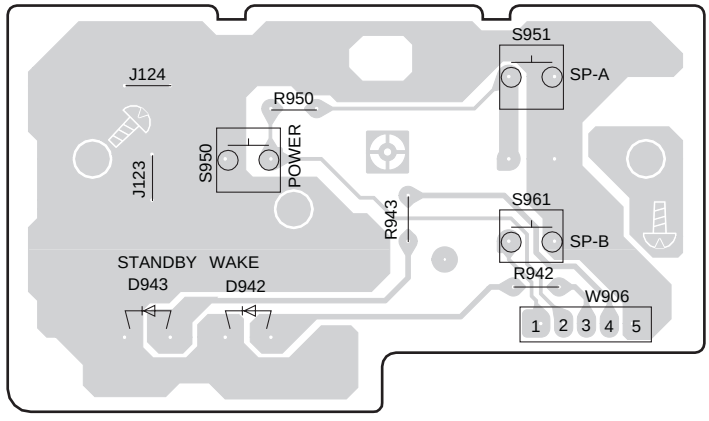

J HEADPHONE P.C.B. (REP3104E-S)

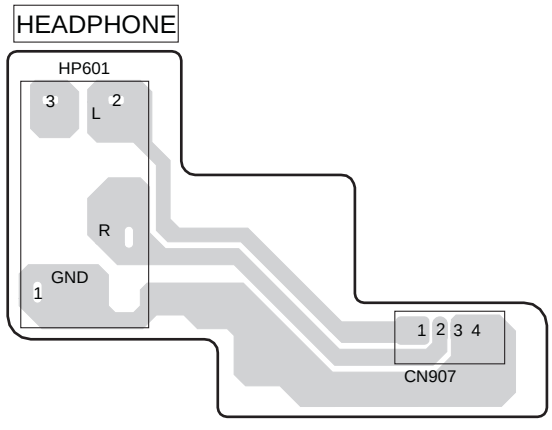

K FRONT SPEAKER A P.C.B. (REP3104E-S)



M SUB-TRANSFORMER P.C.B. (REP3109C-M...E/EG)
(REP3109D-M...EB)

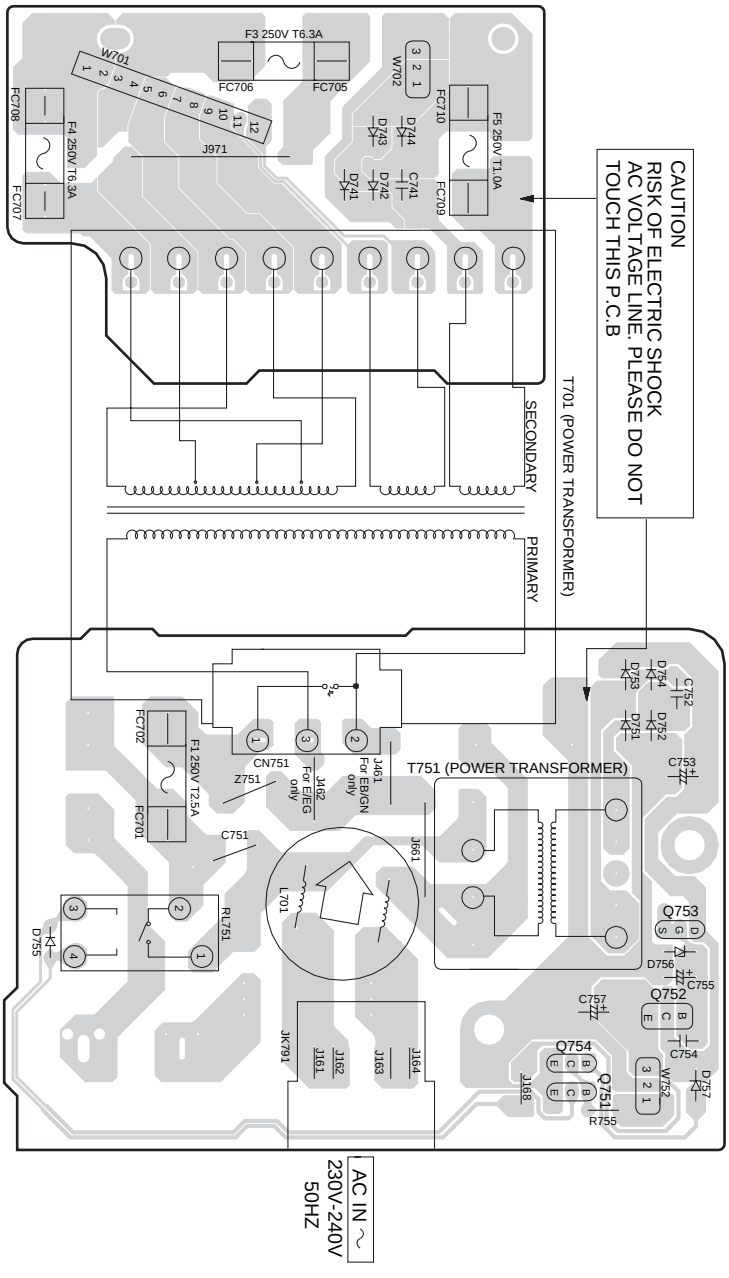

F TRANSFORMER P.C.B. (REP3109C-M...E/EG)
(REP3109D-M...EB)

SCHEMATIC DIAGRAM - 1

—— : +B SIGNAL LINE - – : -B SIGNAL LINE ⇨ : MAIN SIGNAL LINE

A DIGITAL CIRCUIT

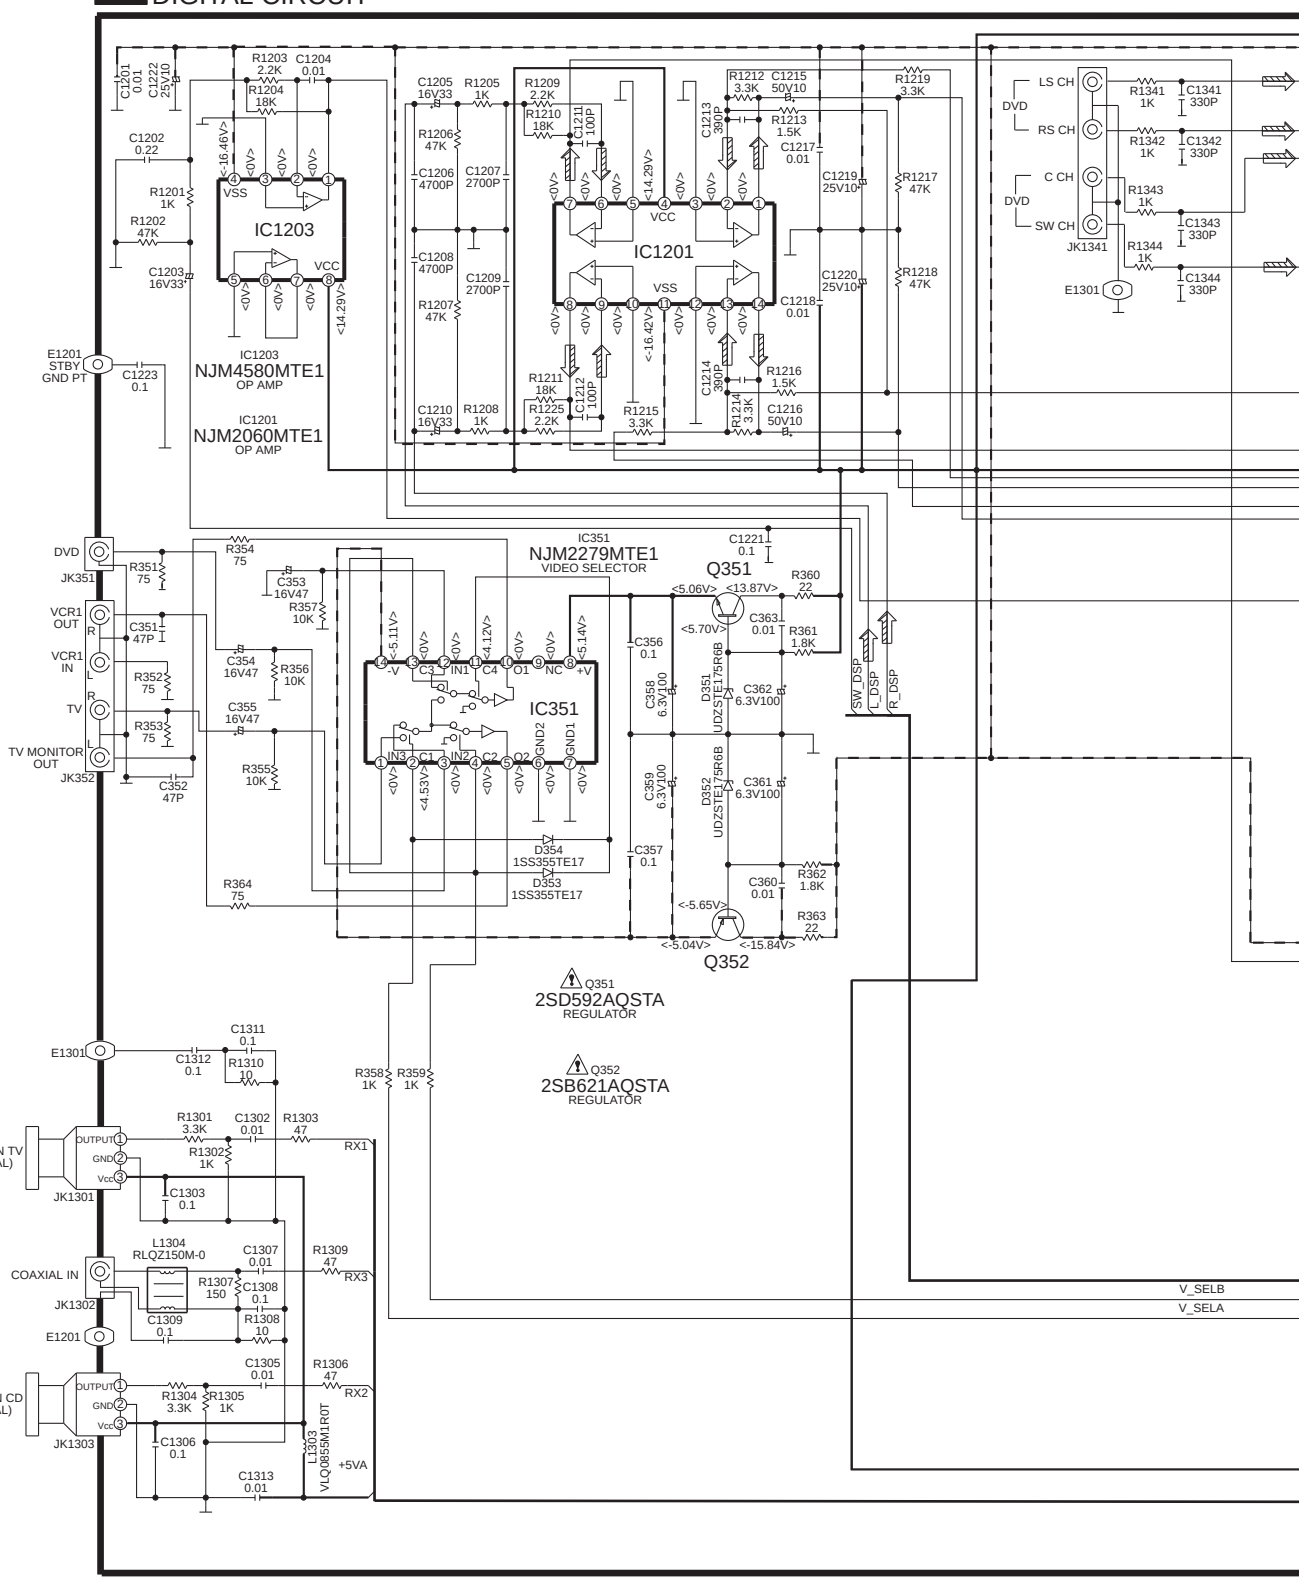

SCHEMATIC DIAGRAM - 2

—— : +B SIGNAL LINE - - : -B SIGNAL LINE ⇒ : MAIN SIGNAL LINE

A DIGITAL CIRCUIT

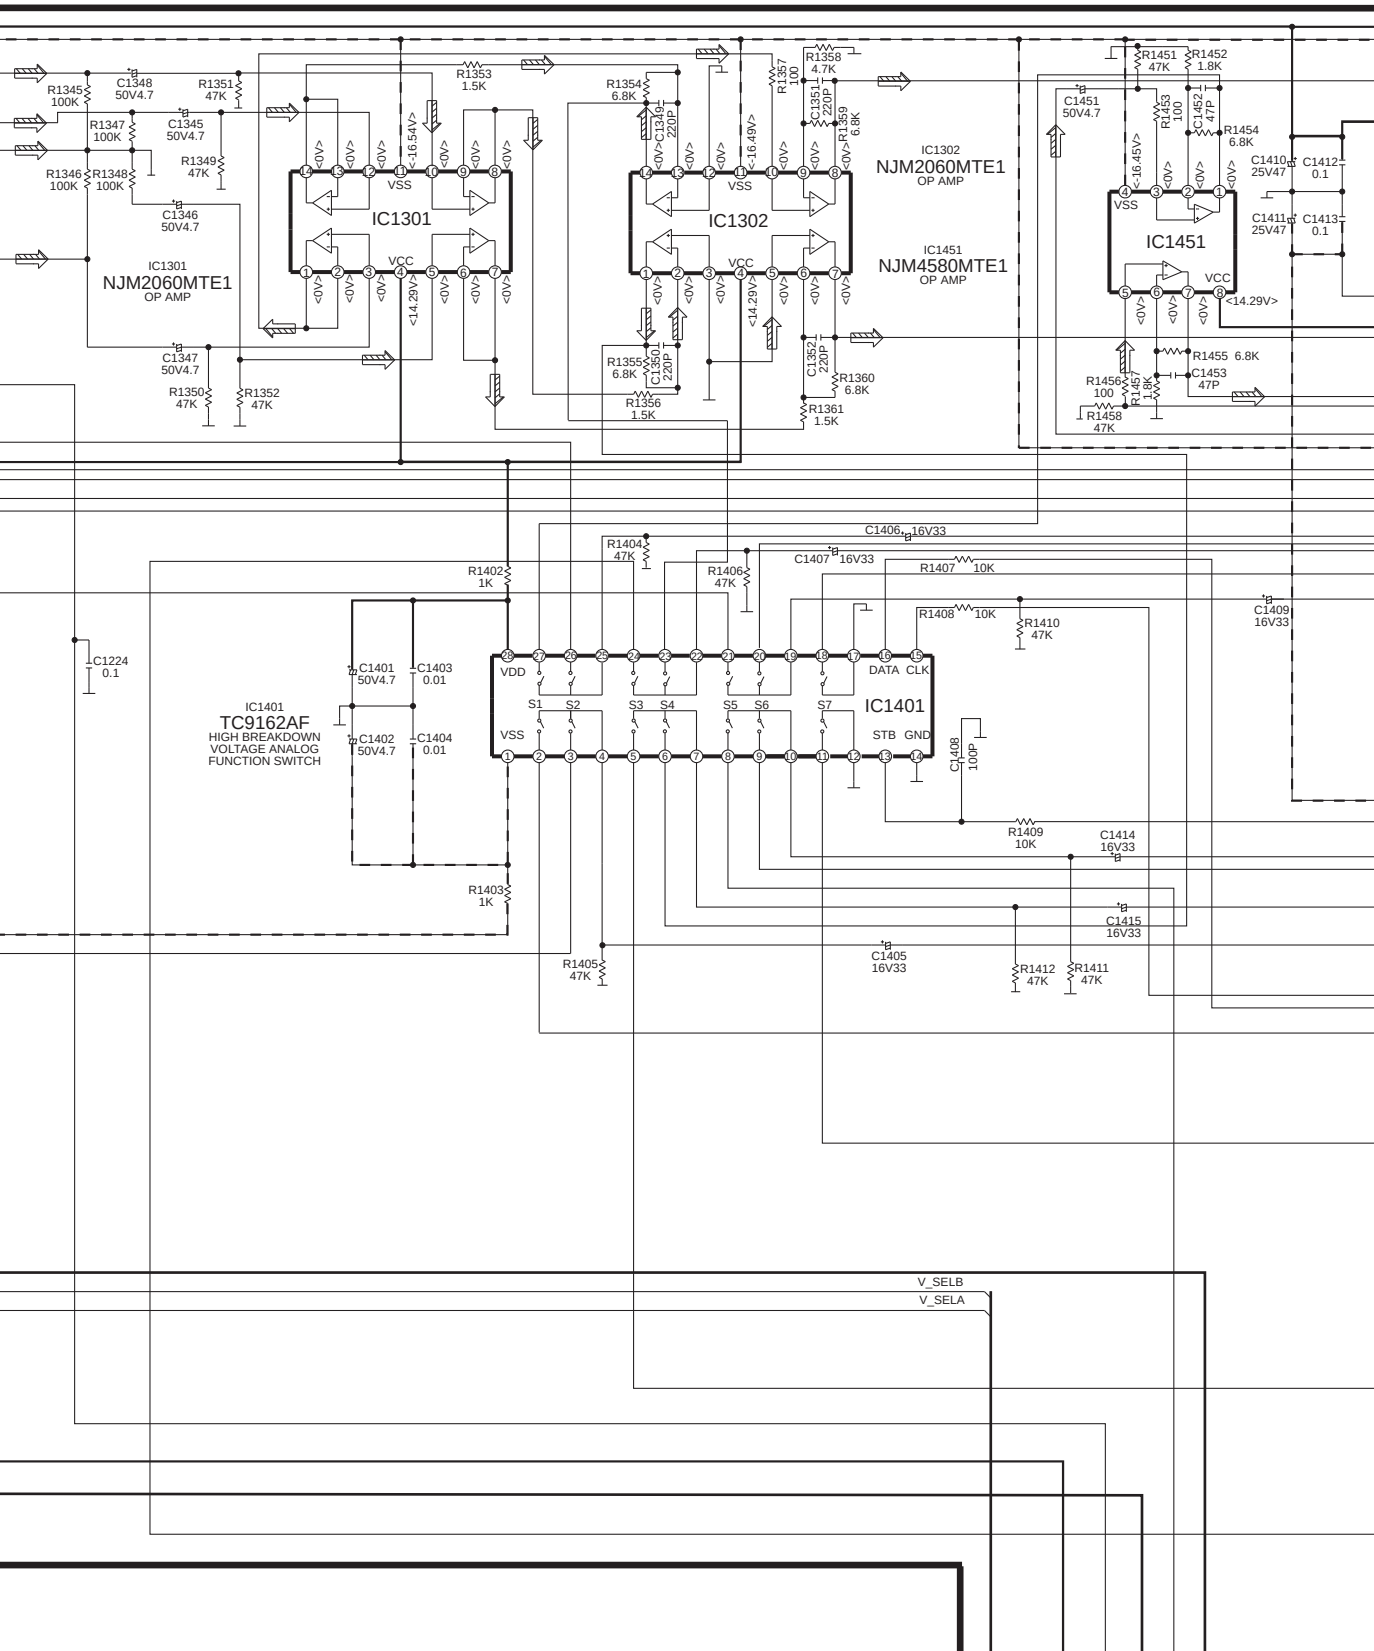

SCHEMATIC DIAGRAM - 3

—— : +B SIGNAL LINE - – : -B SIGNAL LINE ⇨ : MAIN SIGNAL LINE

A DIGITAL CIRCUIT

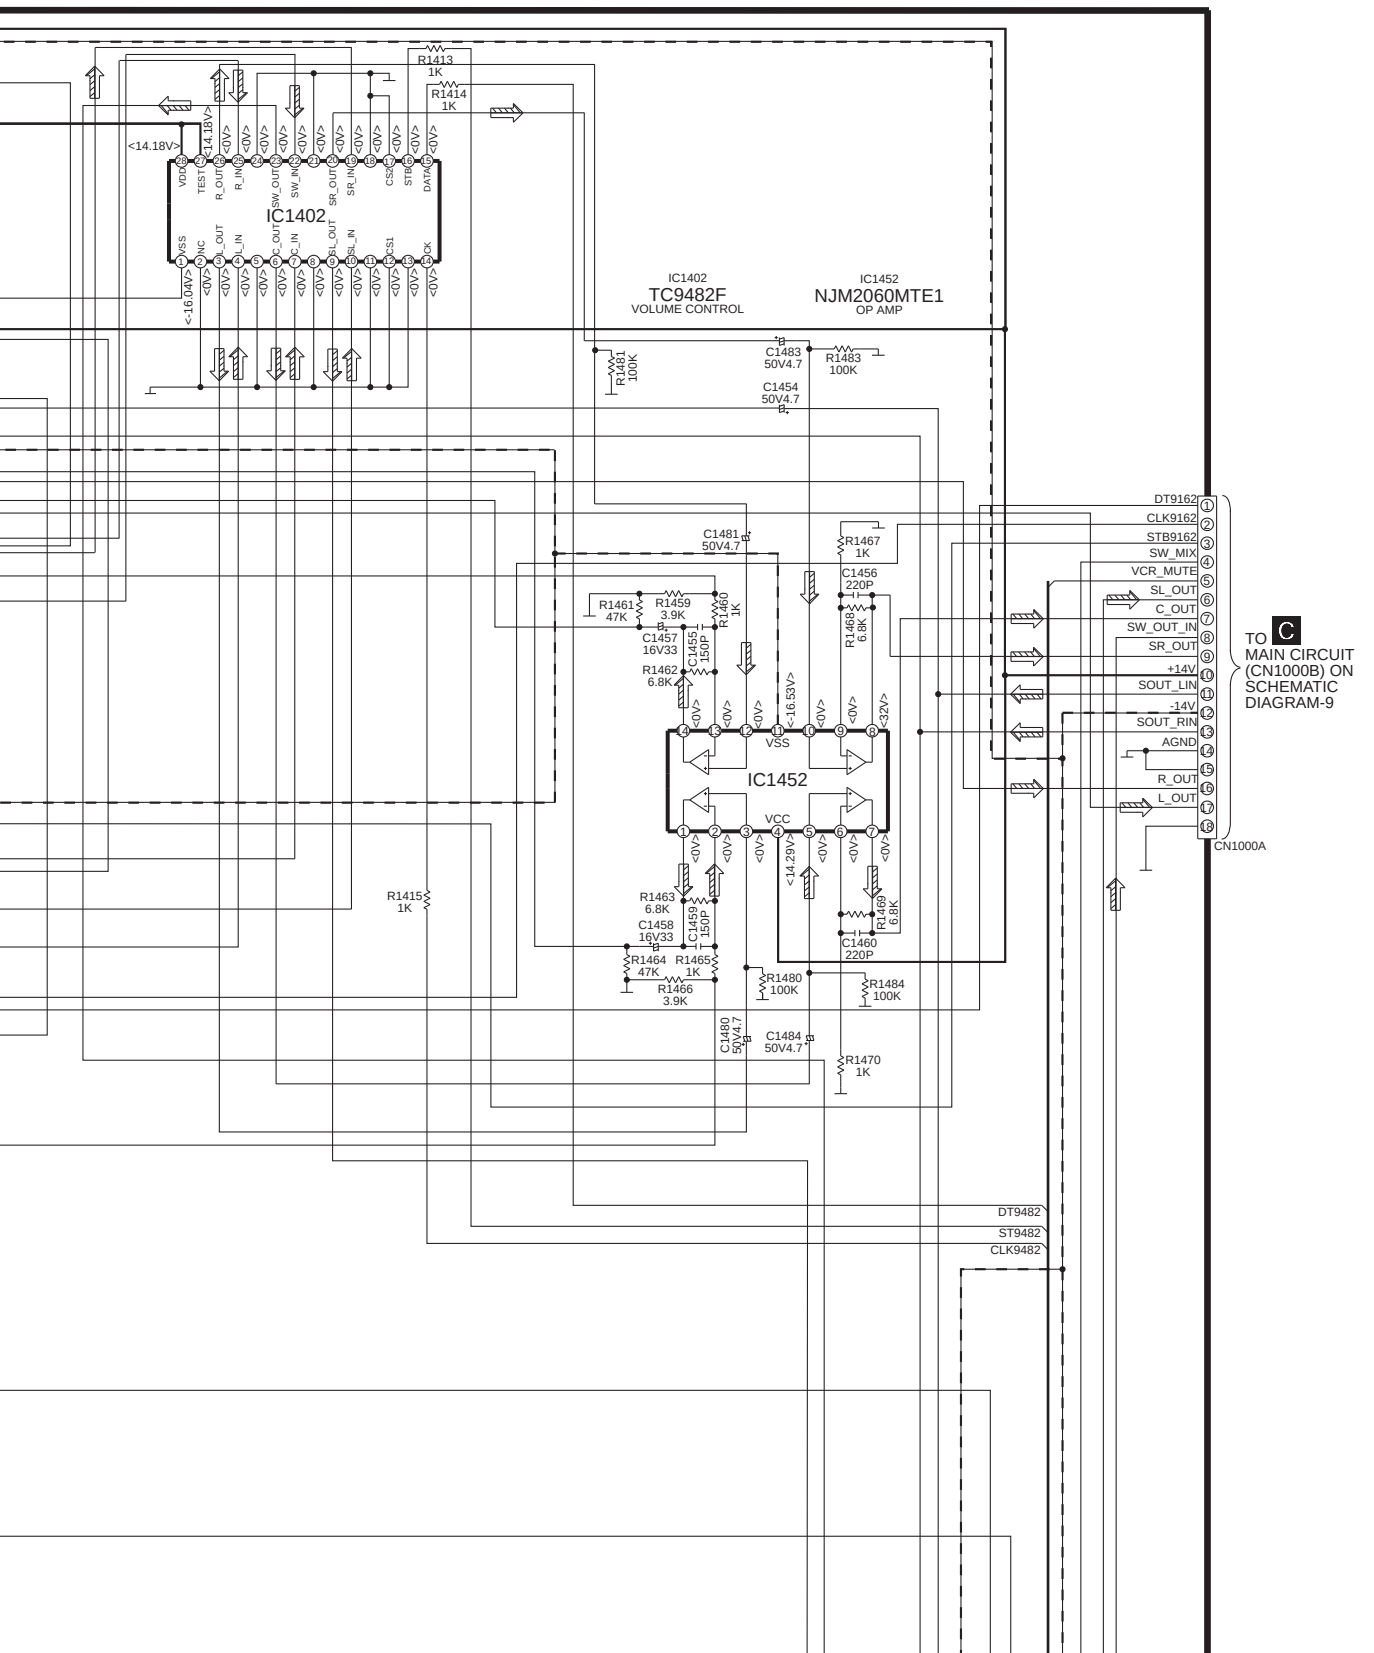

SCHEMATIC DIAGRAM - 4

—— : +B SIGNAL LINE

A DIGITAL CIRCUIT

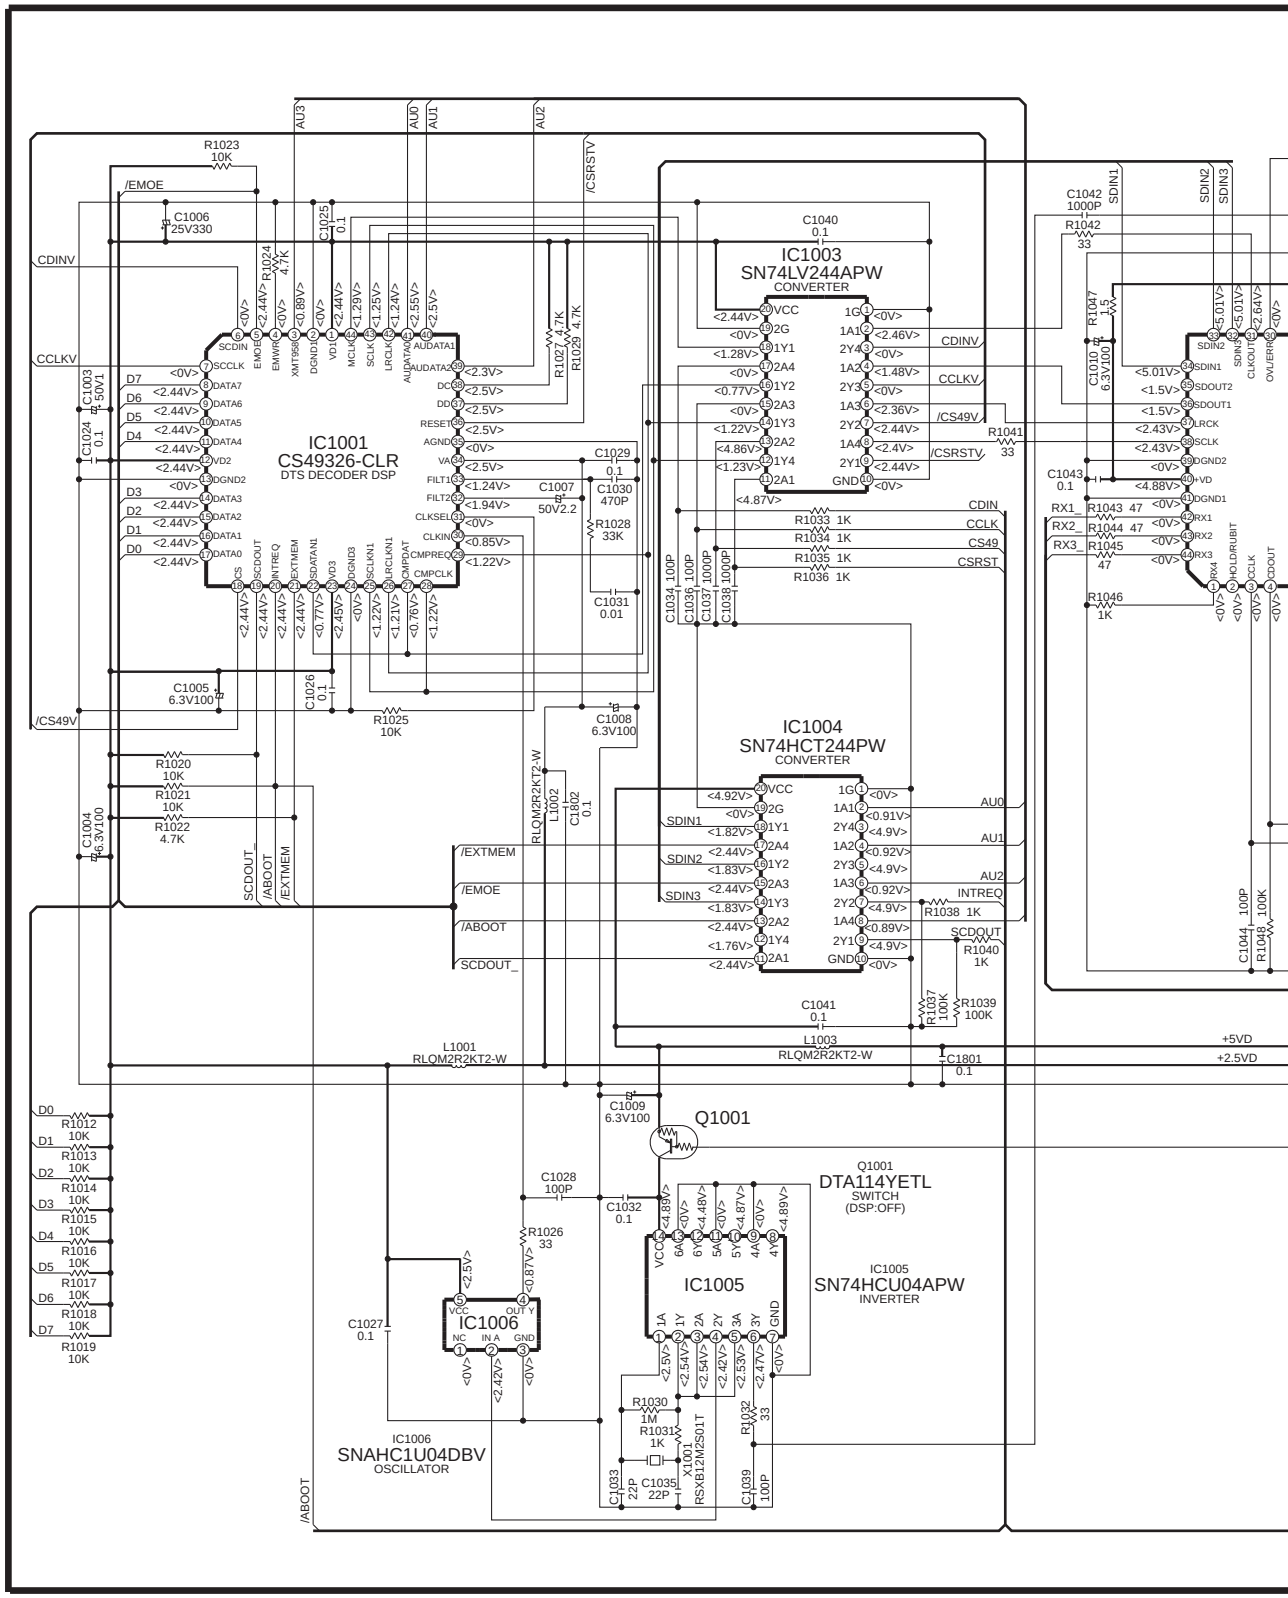

SCHEMATIC DIAGRAM - 5

: +B SIGNAL LINE : MAIN SIGNAL LINE

A DIGITAL CIRCUIT

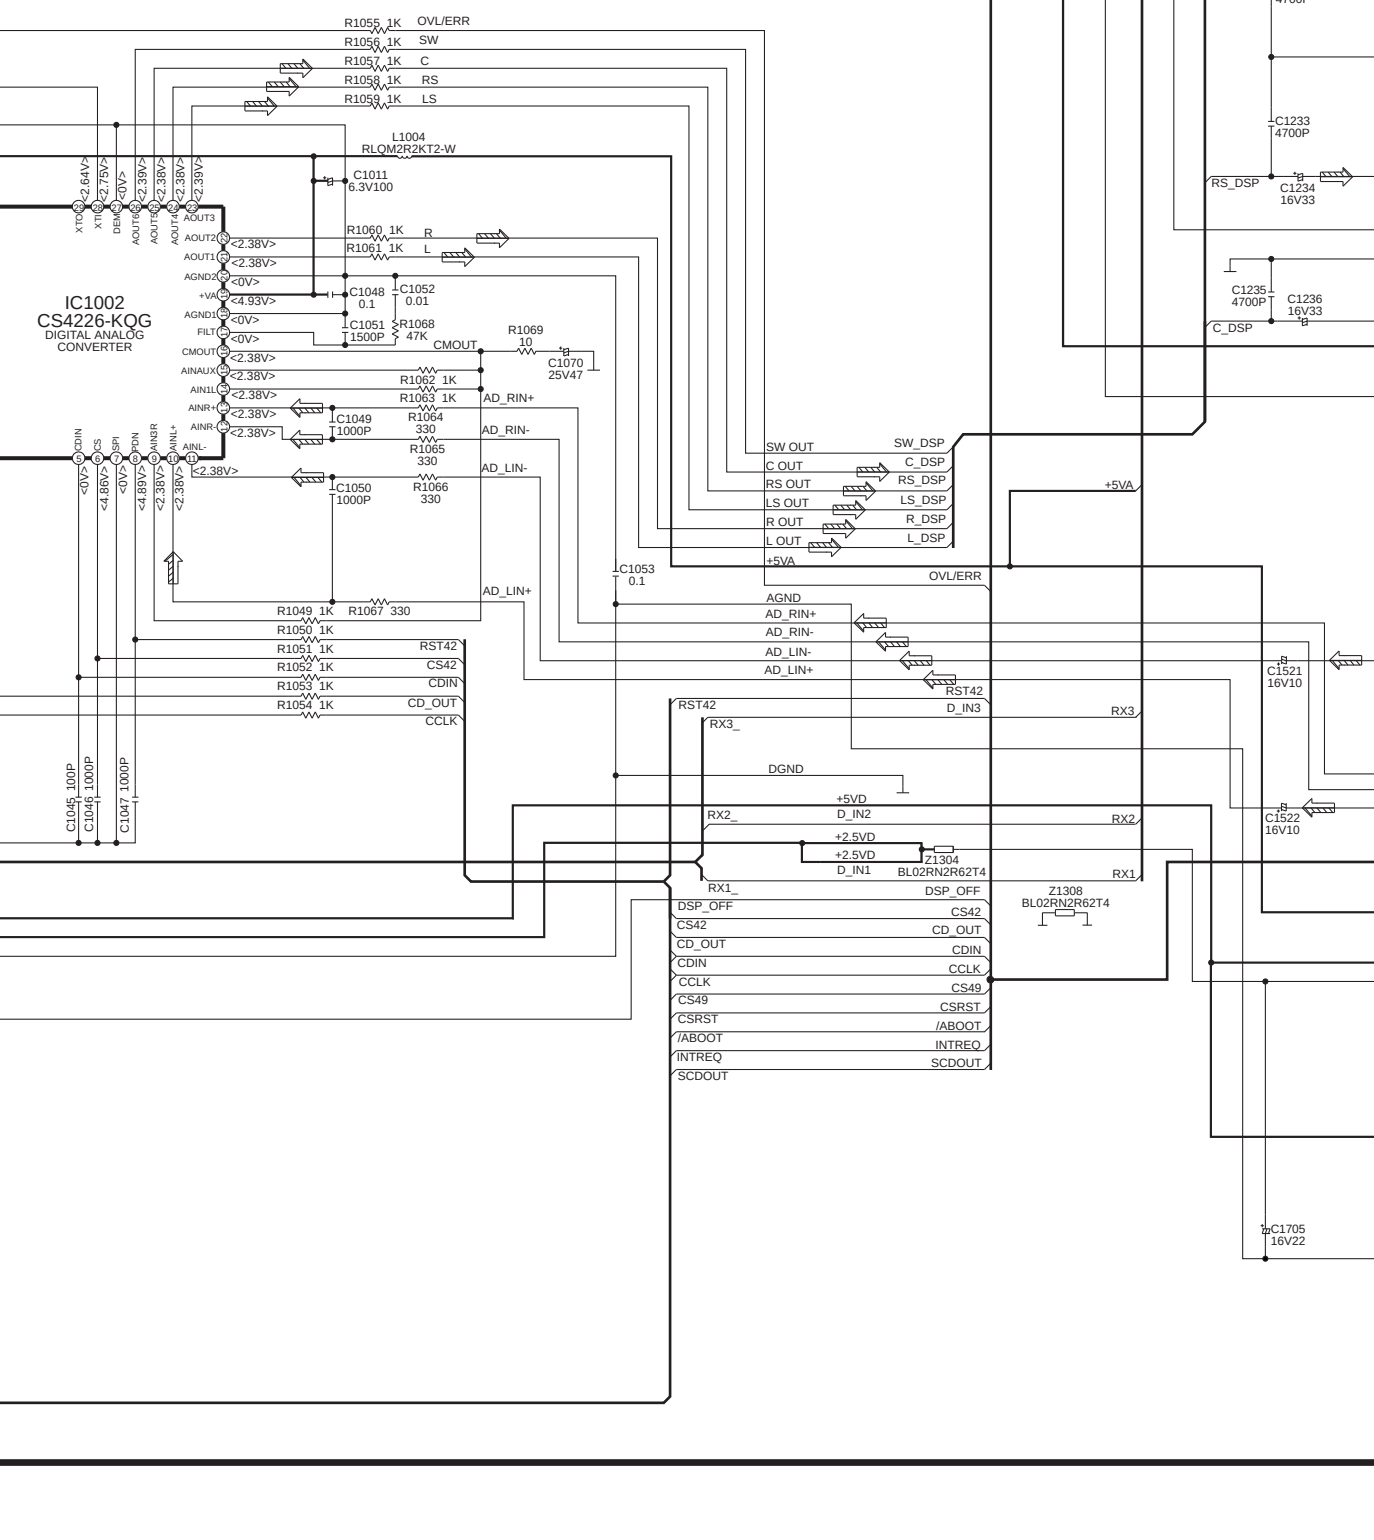

SCHEMATIC DIAGRAM - 6

—— : +B SIGNAL LINE - – : -B SIGNAL LINE ⇒ : MAIN SIGNAL LINE

A DIGITAL CIRCUIT

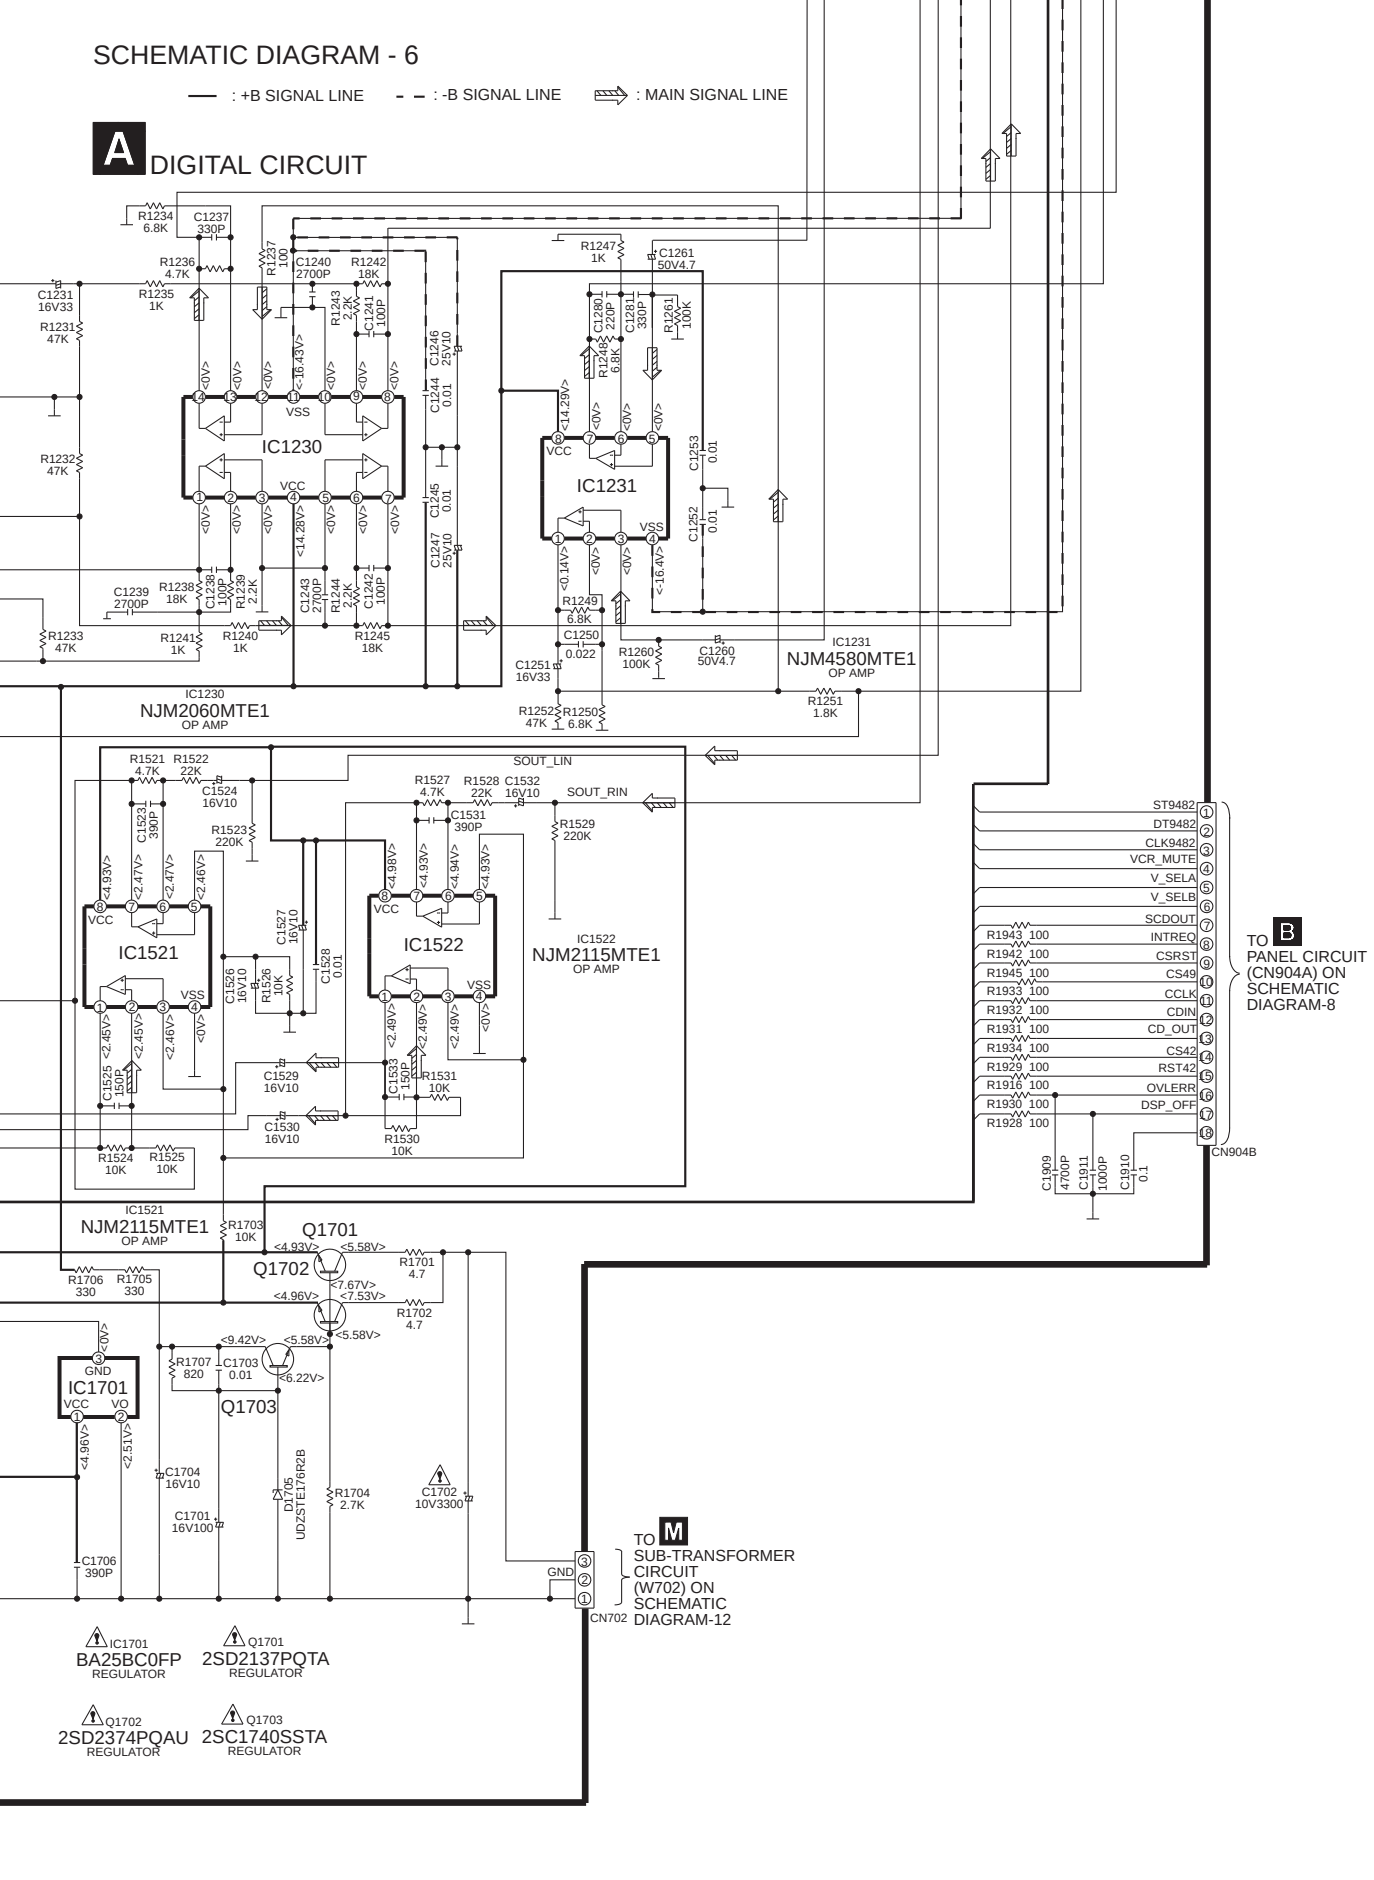

SCHEMATIC DIAGRAM - 7

—— : +B SIGNAL LINE - - : -B SIGNAL LINE ⇨ : MAIN SIGNAL LINE

B PANEL CIRCUIT

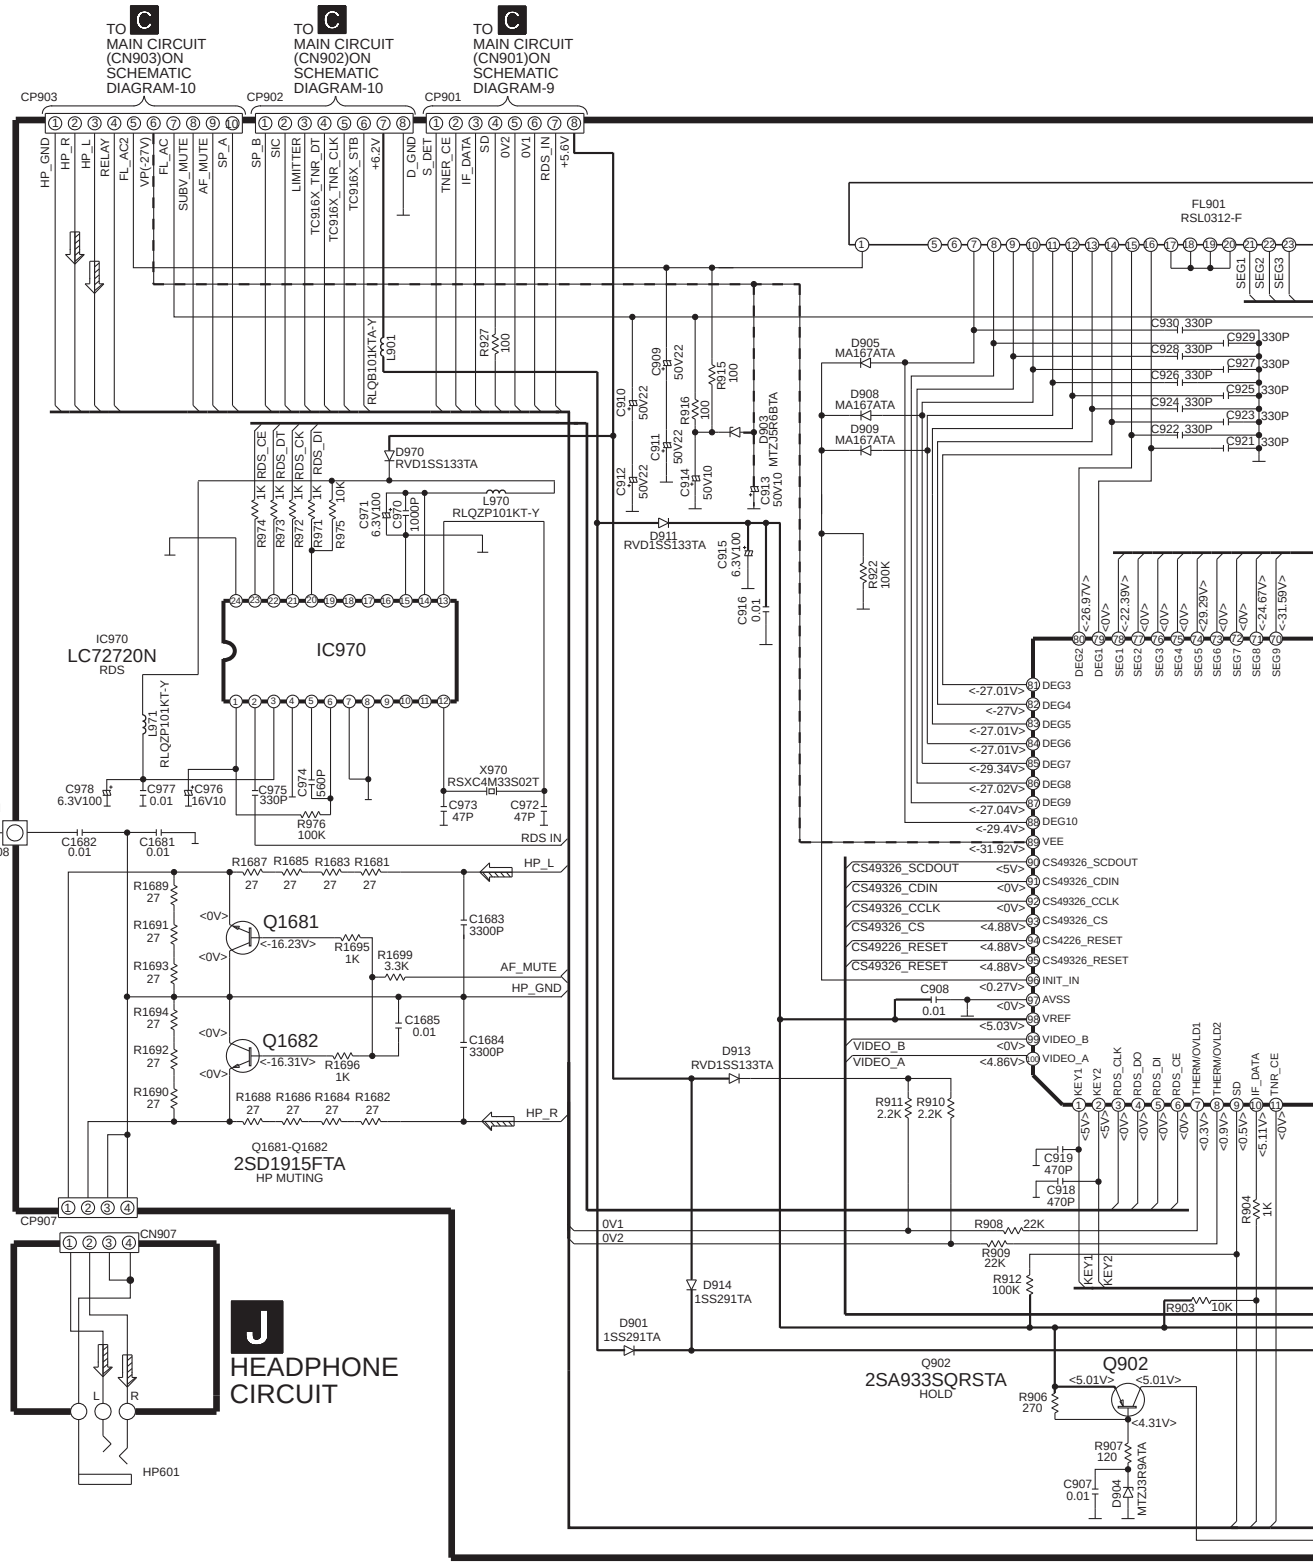

SCHEMATIC DIAGRAM - 8

—— : +B SIGNAL LINE

B PANEL CIRCUIT

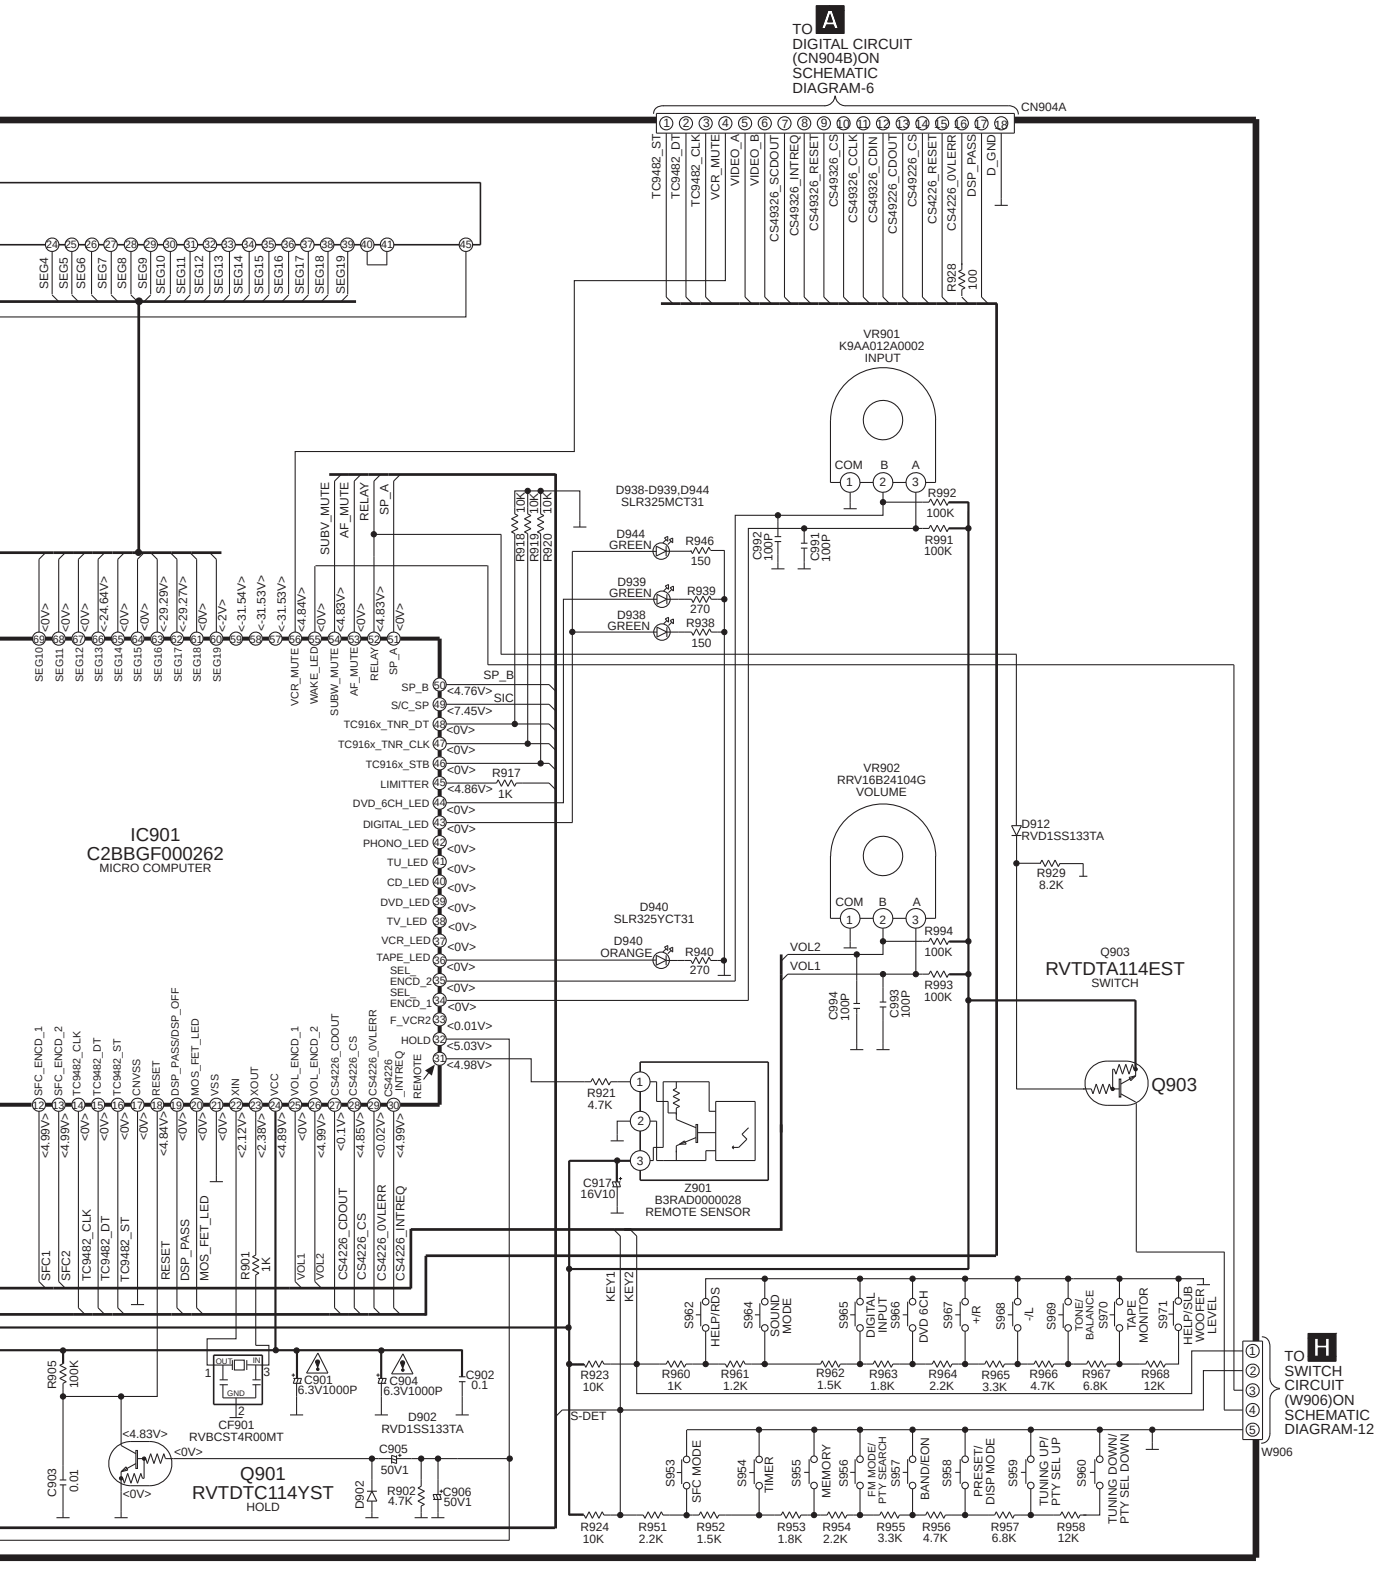

SCHEMATIC DIAGRAM - 9

: +B SIGNAL LINE : -B SIGNAL LINE : FM/AM SIGNAL LINE : MAIN SIGNAL LINE

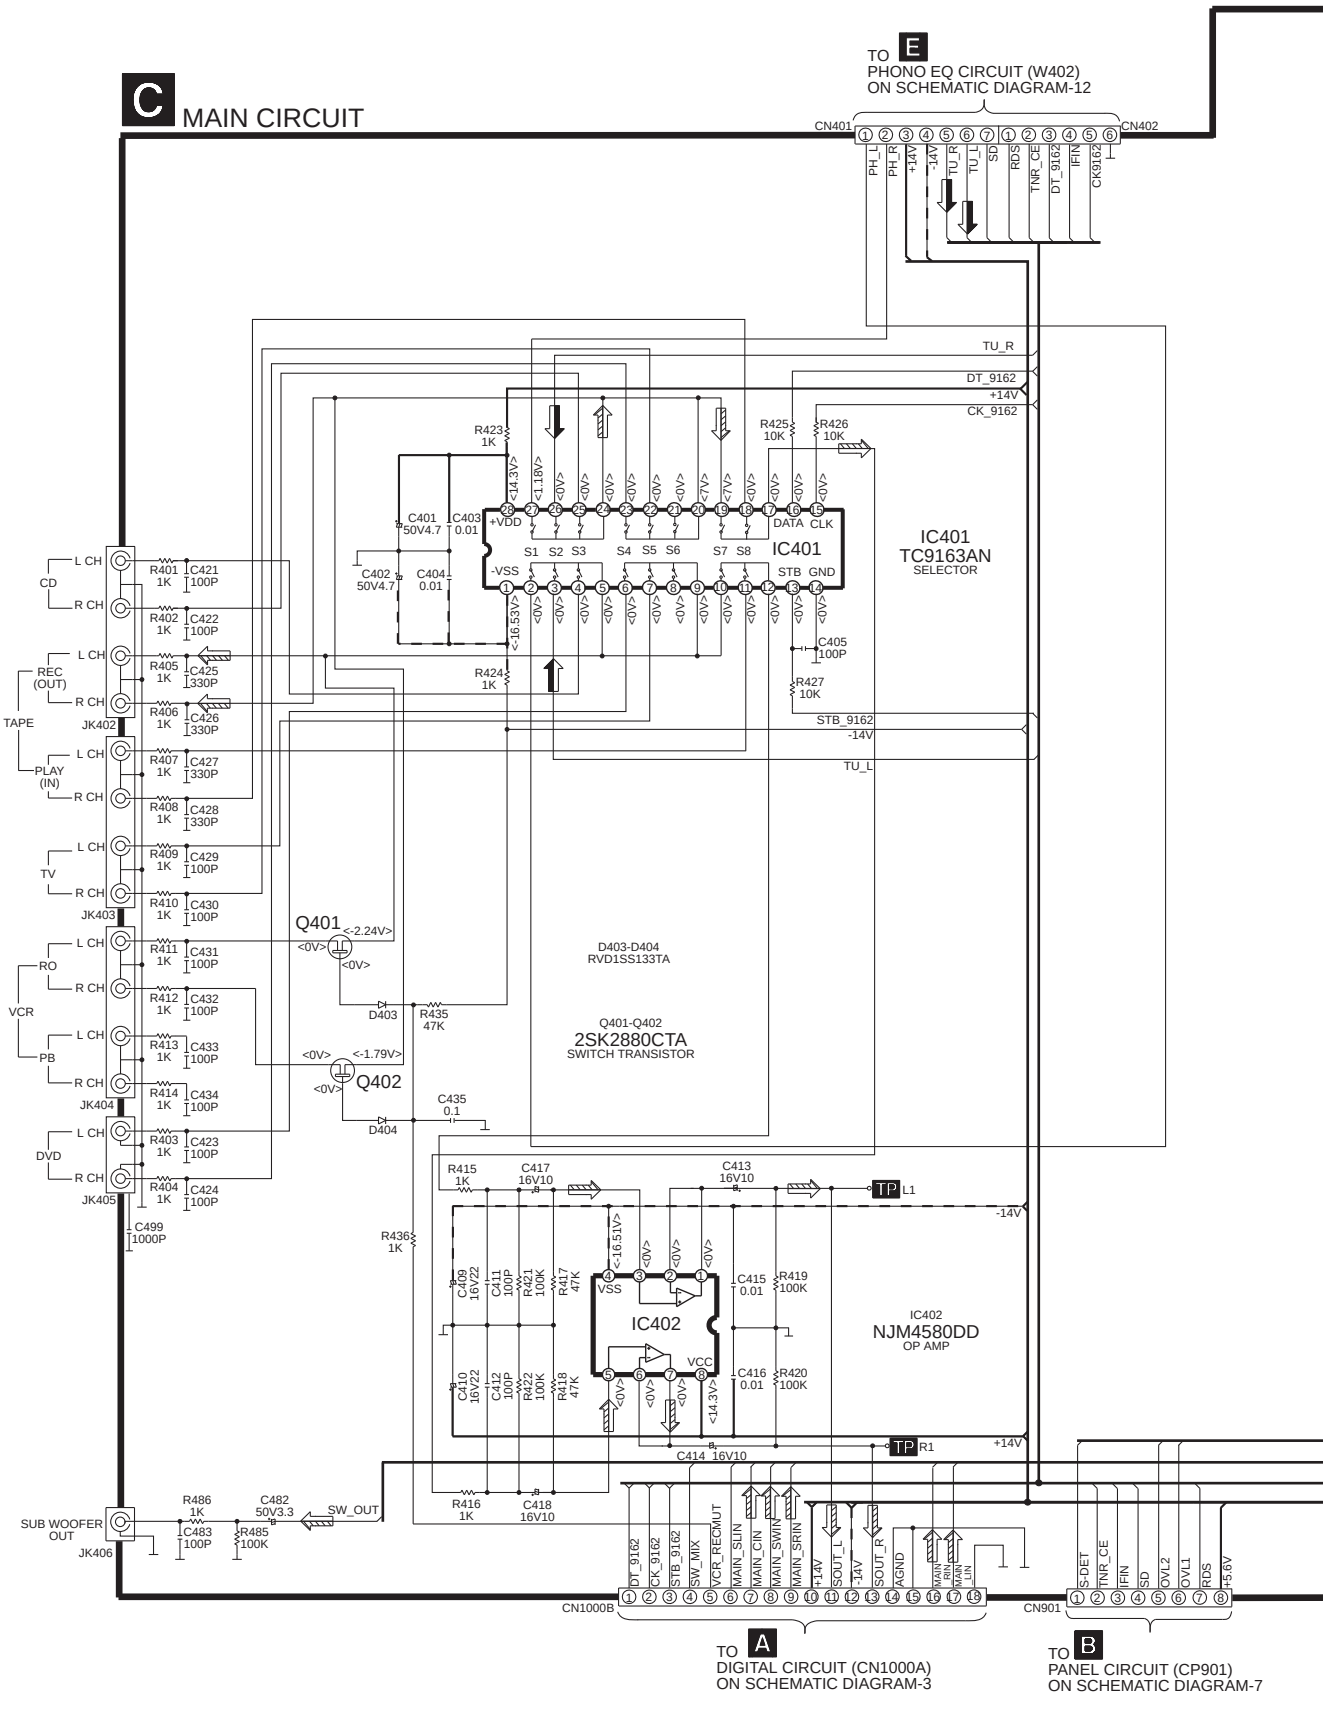

SCHEMATIC DIAGRAM - 10

C MAIN CIRCUIT

—— : +B SIGNAL LINE - – : -B SIGNAL LINE ⇨ : MAIN SIGNAL LINE

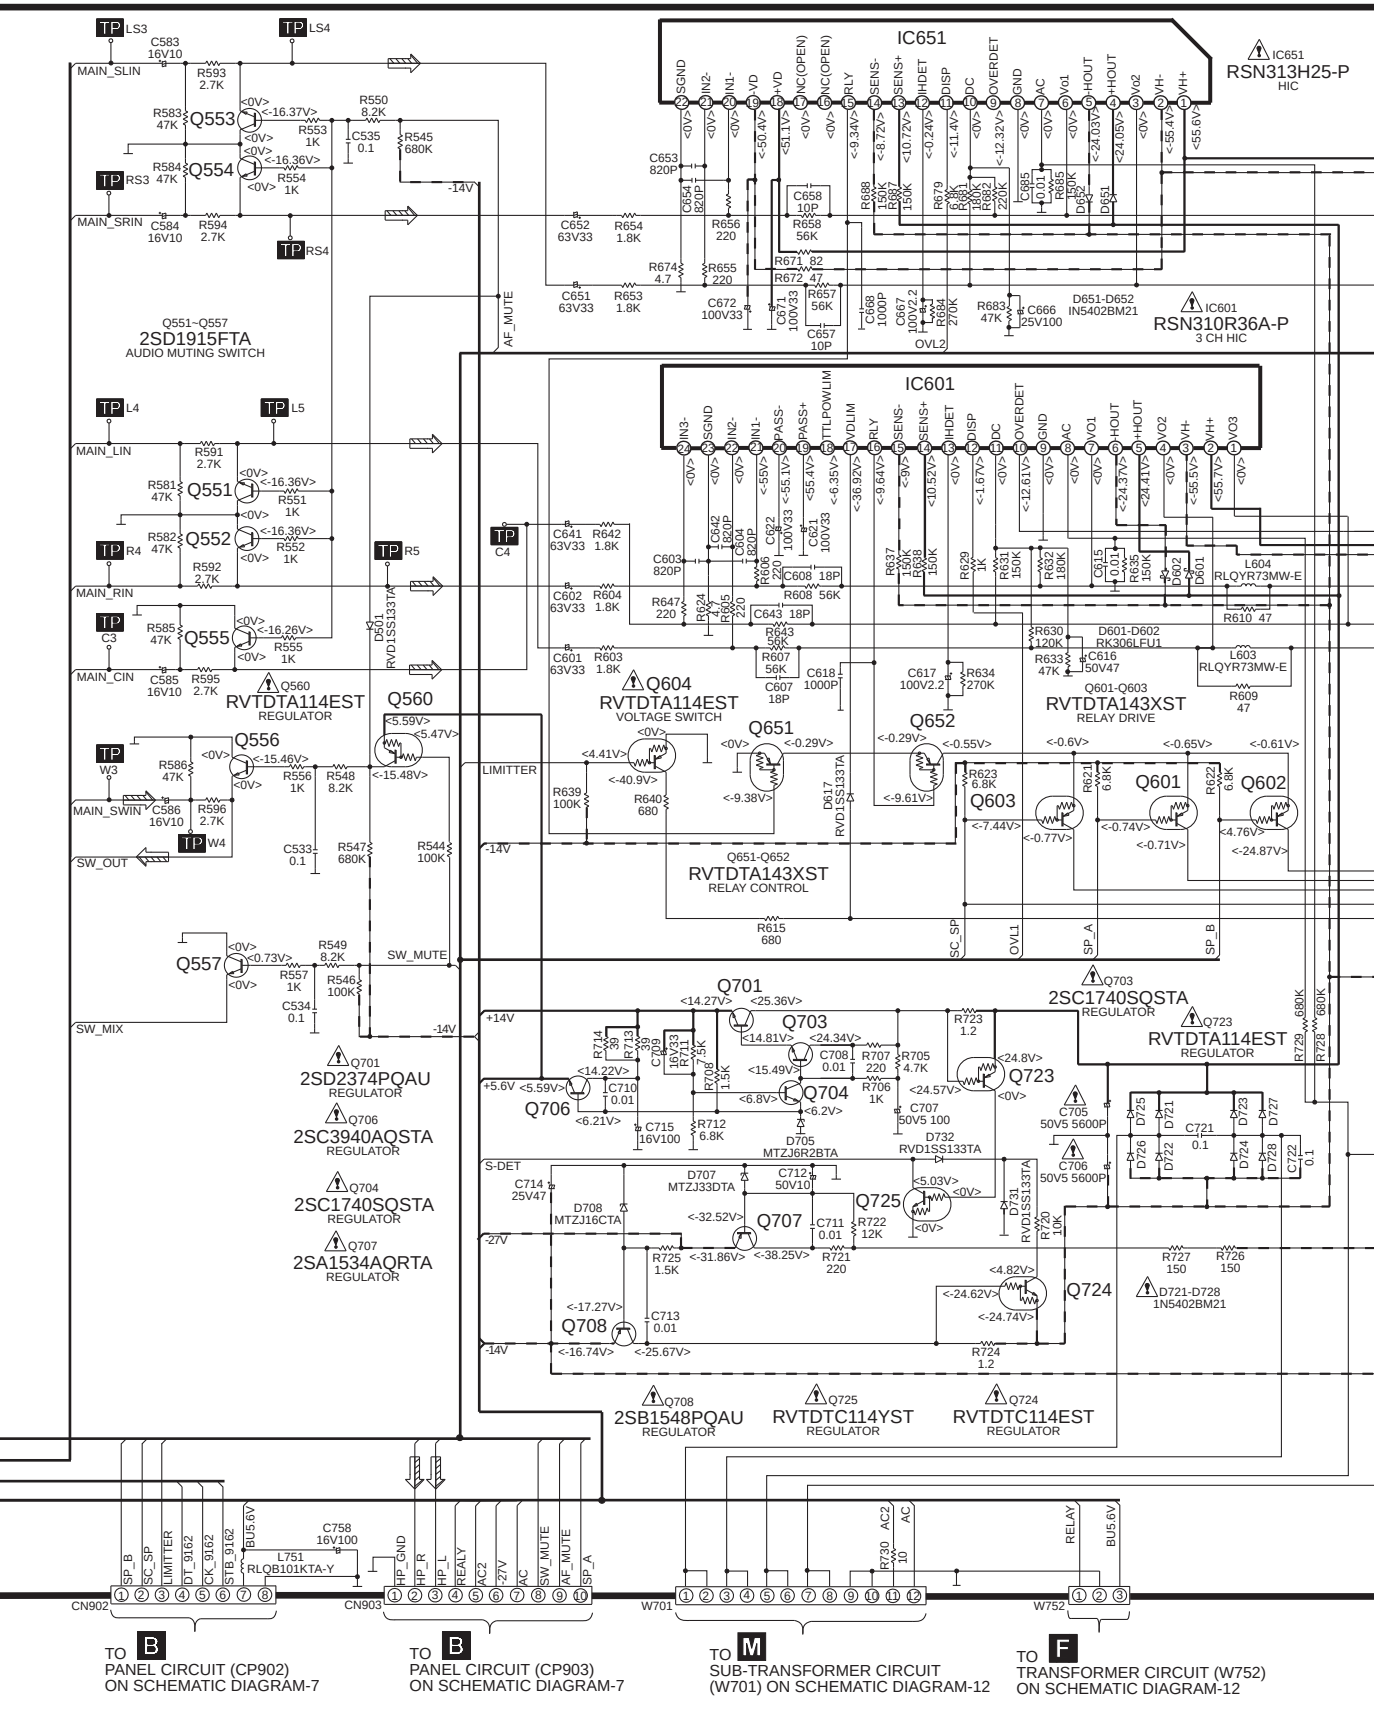

SCHEMATIC DIAGRAM - 11

C MAIN CIRCUIT

—— : +B SIGNAL LINE - – : -B SIGNAL LINE ⇨ : MAIN SIGNAL LINE

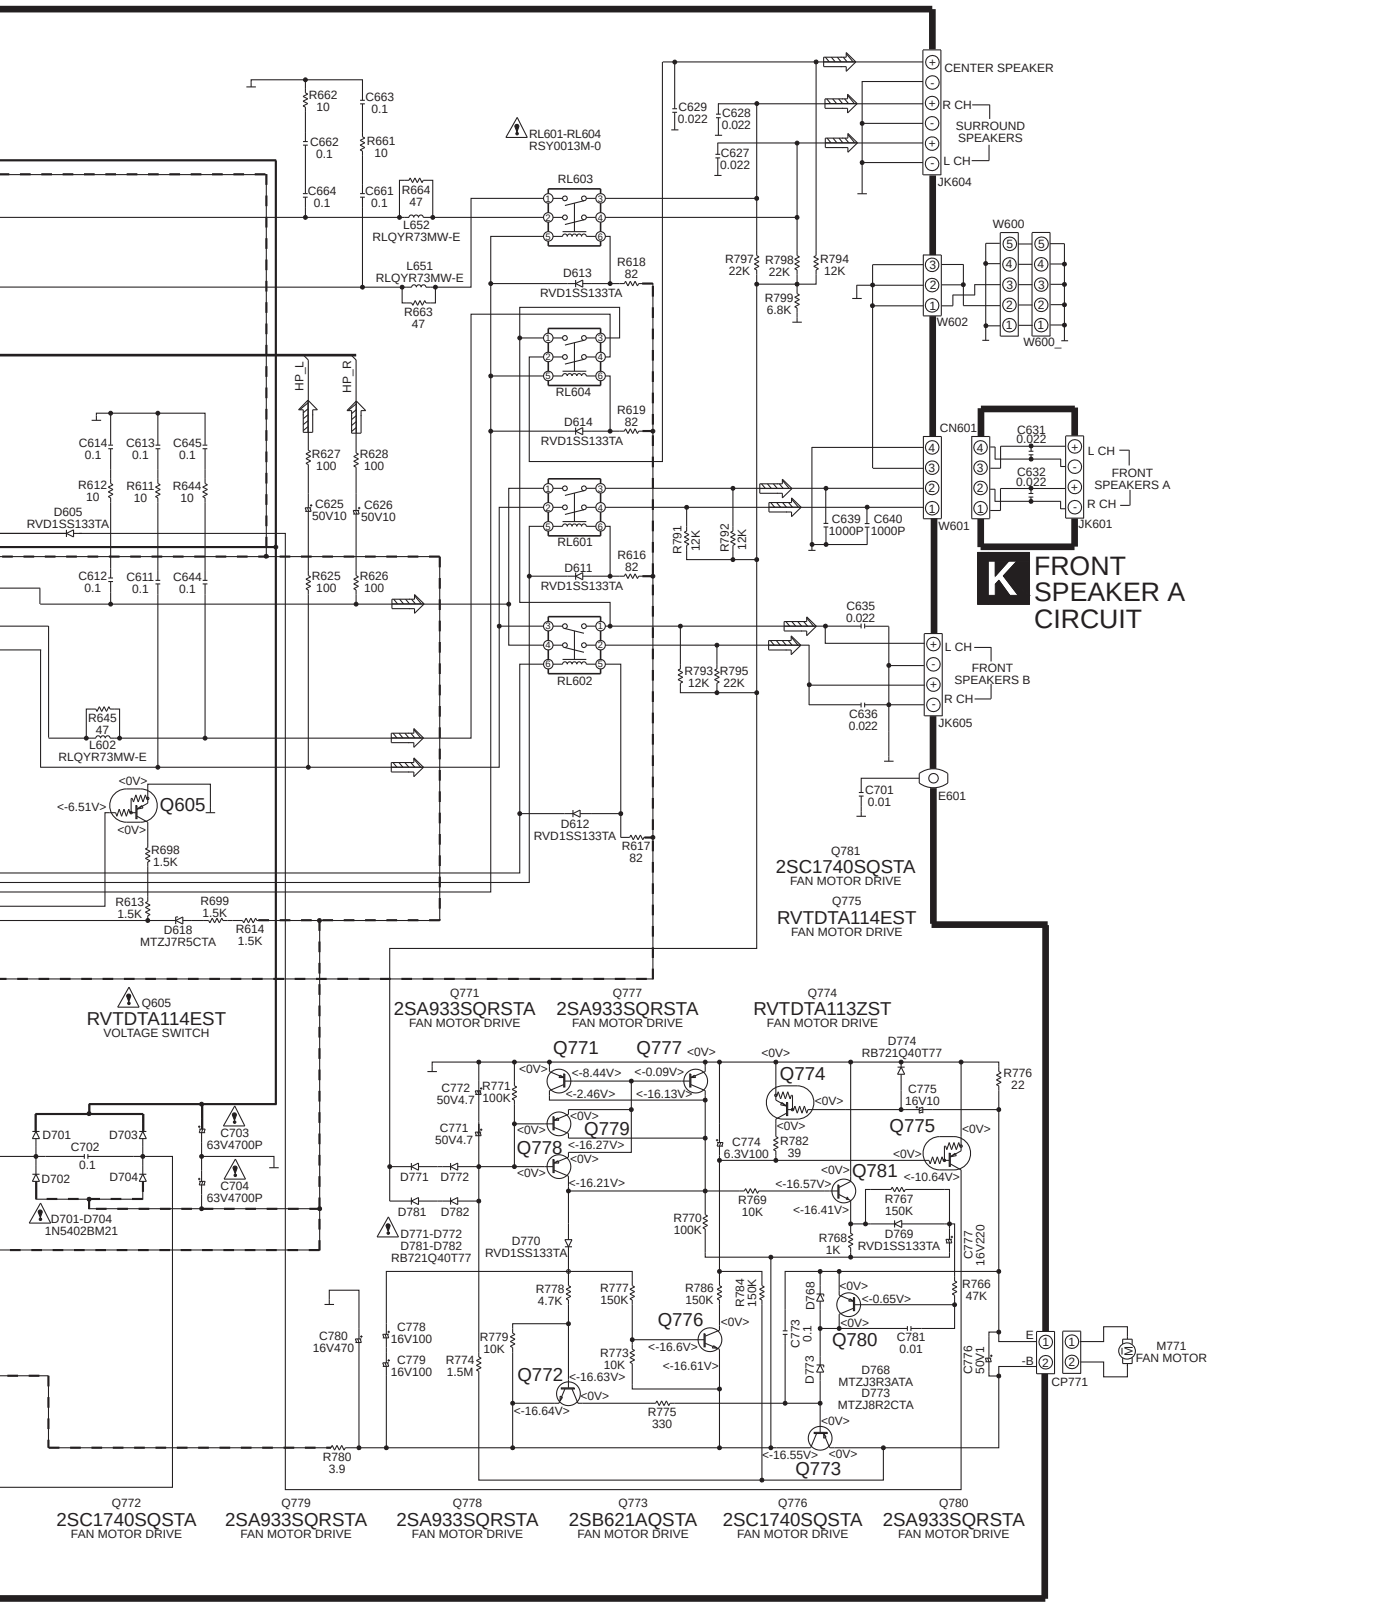

SCHEMATIC DIAGRAM - 12

—— : +B SIGNAL LINE　– – : -B SIGNAL LINE　⇨ : FM/AM SIGNAL LINE

TO L TUNER PACK (RAN0002EM)

E PHONO EQ CIRCUIT

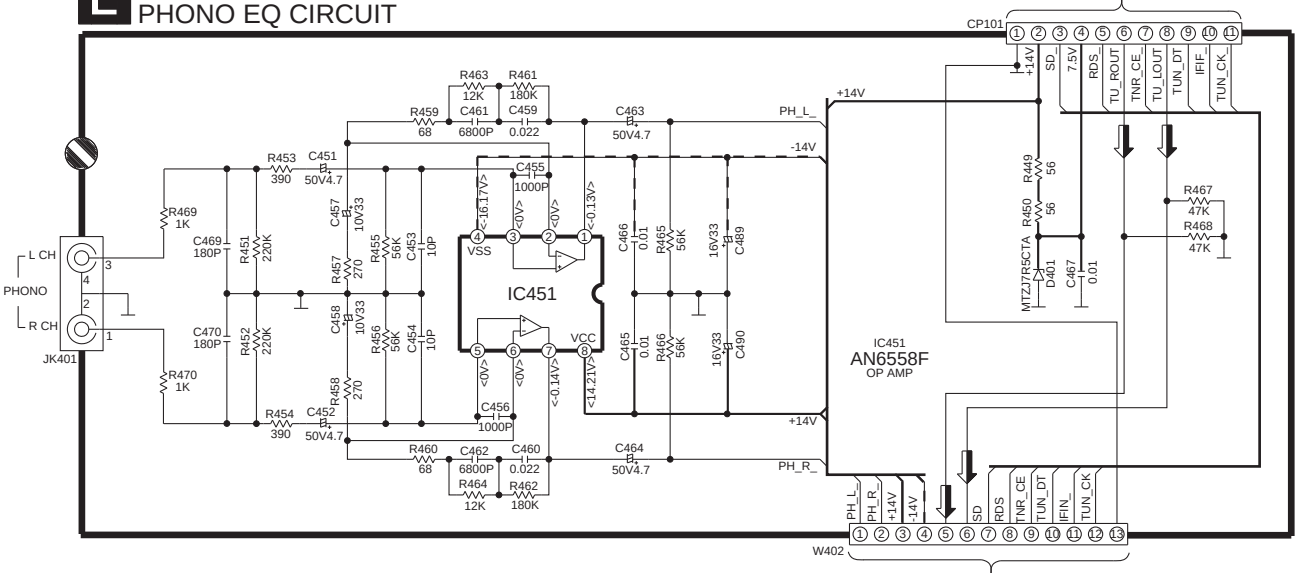

TO C MAIN CIRCUIT (CN401/CN402) ON SCHEMATIC DIAGRAM-9

F TRANSFORMER CIRCUIT

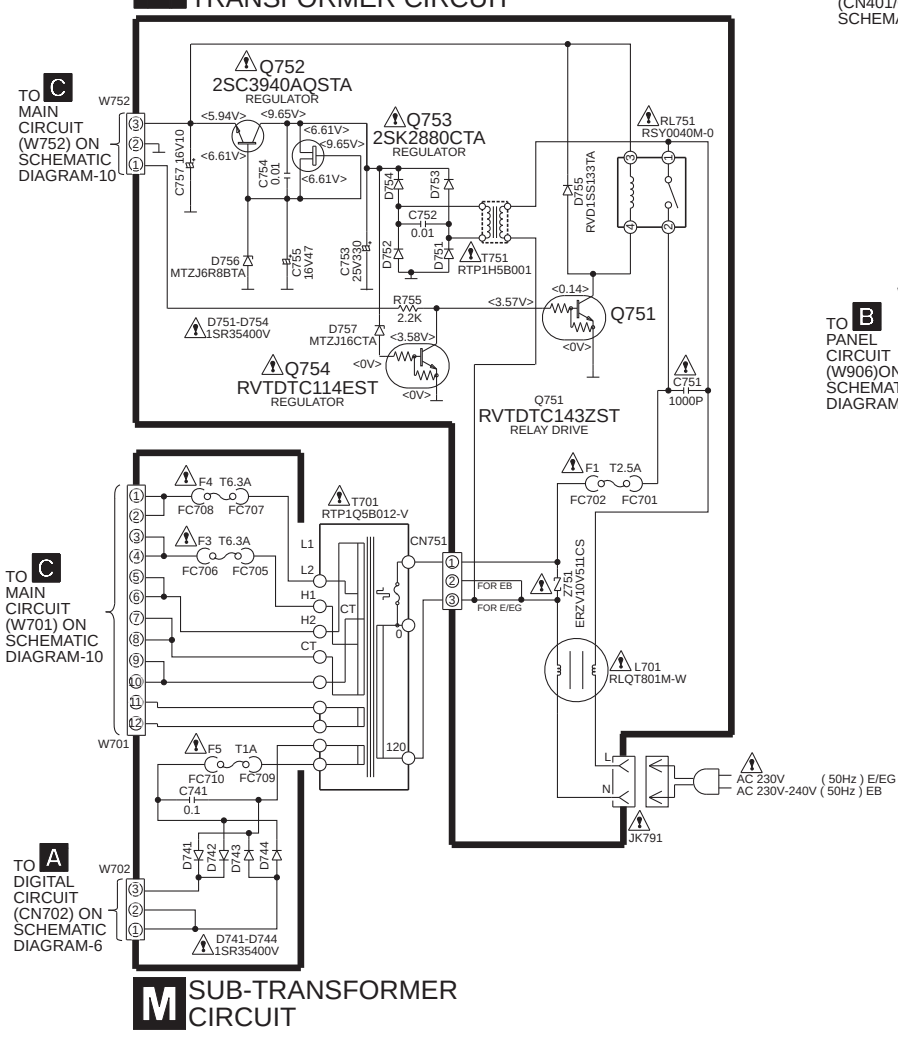

TO C MAIN CIRCUIT (W752) ON SCHEMATIC DIAGRAM-10

TO C MAIN CIRCUIT (W701) ON SCHEMATIC DIAGRAM-10

TO A DIGITAL CIRCUIT (CN702) ON SCHEMATIC DIAGRAM-6

H SWITCH CIRCUIT



TO B PANEL CIRCUIT (W906)ON SCHEMATIC DIAGRAM-8

M SUB-TRANSFORMER CIRCUIT

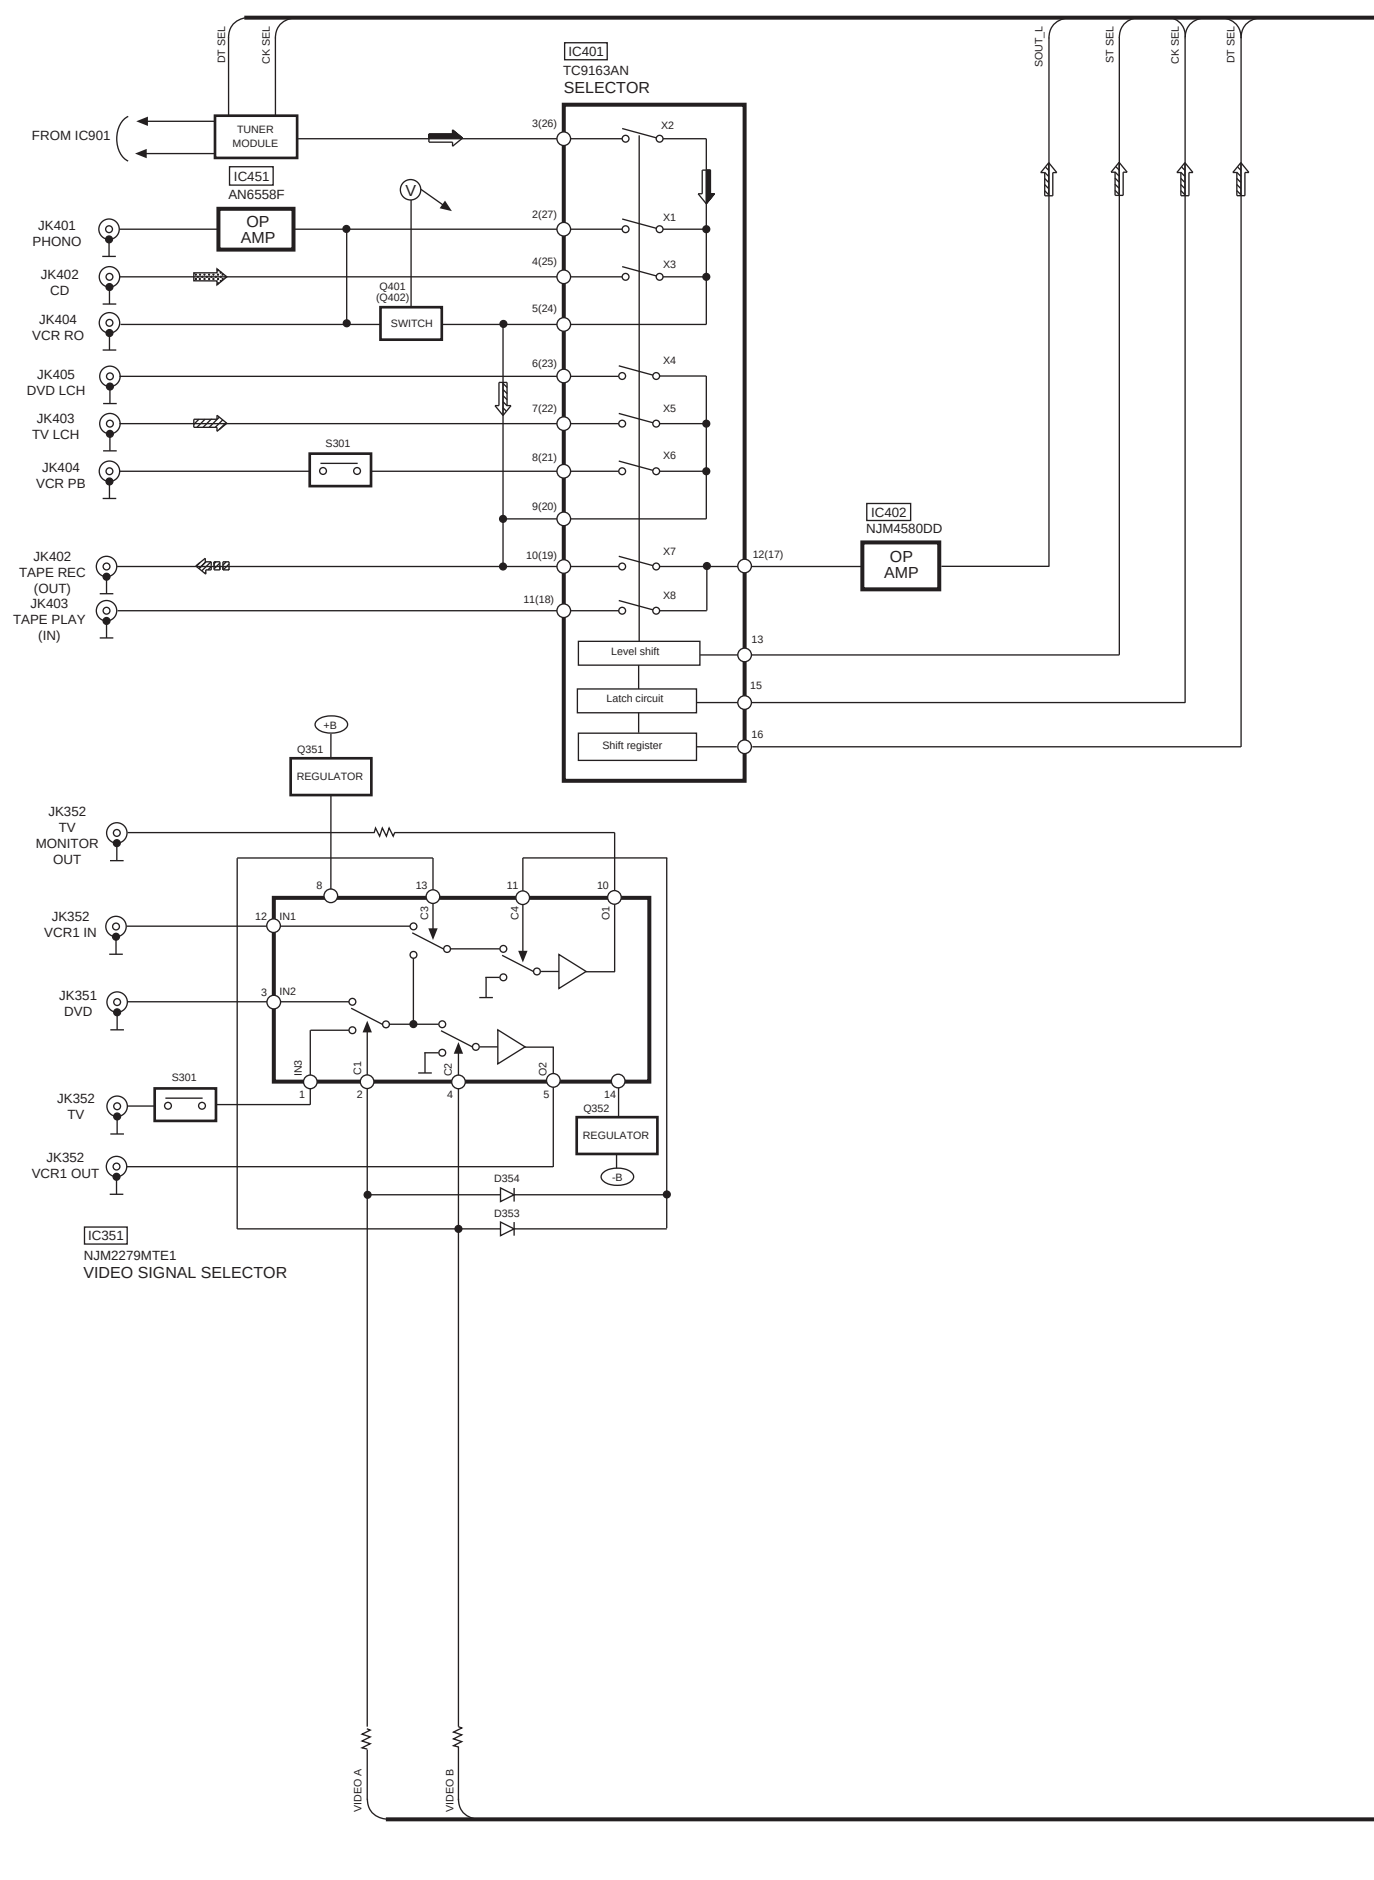
DT SEL
CK SEL
IC401
TC9163AN
SELECTOR
SOUT_L
ST SEL
CK SEL
DT SEL
FROM IC901
TUNER MODULE
IC451
AN6558F
OP AMP
JK401 PHONO
JK402 CD
JK404 VCR RO
JK405 DVD LCH
JK403 TV LCH
JK404 VCR PB
Q401 (Q402)
SWITCH
S301
3(26)
2(27)
4(25)
5(24)
6(23)
7(22)
8(21)
9(20)
10(19)
11(18)
X1
X2
X3
X4
X5
X6
X7
X8
IC402
NJM4580DD
OP AMP
12(17)
JK402 TAPE REC (OUT)
JK403 TAPE PLAY (IN)
Level shift
Latch circuit
Shift register
13
15
16
+B
Q351
REGULATOR
JK352 TV MONITOR OUT
JK352 VCR1 IN
JK351 DVD
JK352 TV
JK352 VCR1 OUT
IN1
IN2
IN3
C1
C2
C3
C4
O1
O2
Q352
REGULATOR
-B
D354
D353
IC351
NJM2279MTE1
VIDEO SIGNAL SELECTOR
VIDEO A
VIDEO B

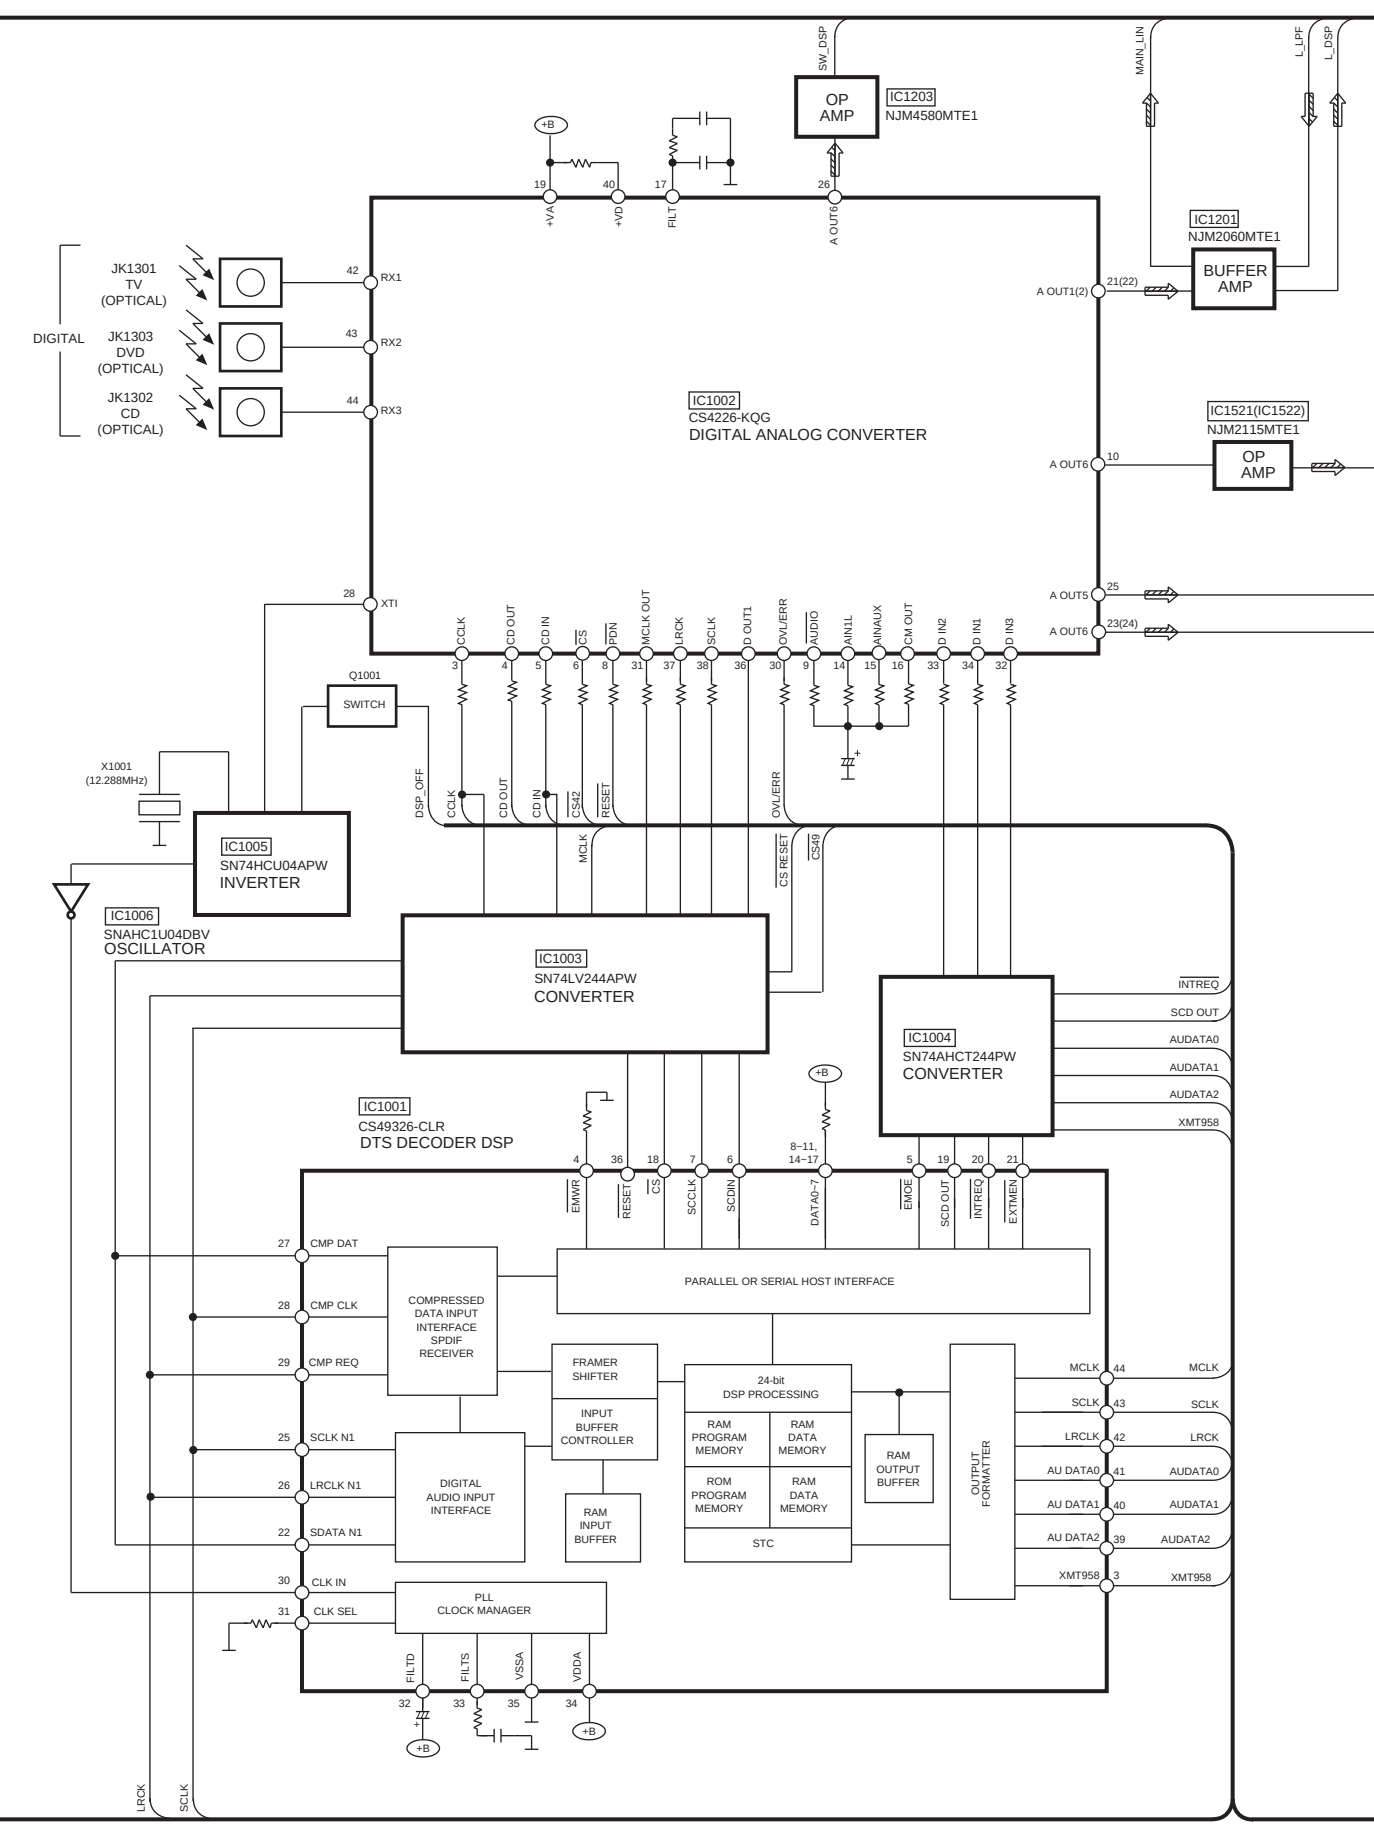
SW_DSP
OP AMP
IC1203
NJM4580MTE1
MAIN_LIN
L_LPF
L_DSP
+B
19
+VA
40
+VD
17
FILT
26
A OUT6
IC1201
NJM2060MTE1
BUFFER AMP
A OUT1(2)
21(22)
DIGITAL
JK1301
TV
(OPTICAL)
JK1303
DVD
(OPTICAL)
JK1302
CD
(OPTICAL)
42
RX1
43
RX2
44
RX3
IC1002
CS4226-KQG
DIGITAL ANALOG CONVERTER
IC1521(IC1522)
NJM2115MTE1
OP AMP
A OUT6
10
A OUT5
25
23(24)
28
XTI
CCLK
CD OUT
CD IN
CS
PDN
MCLK OUT
LRCK
SCLK
D OUT1
OVL/ERR
AUDIO
AIN1L
AINAUX
CM OUT
D IN2
D IN1
D IN3
3
4
5
6
8
31
37
38
36
30
9
14
15
16
33
34
32
Q1001
SWITCH
X1001
(12.288MHz)
DSP_OFF
CCLK
CD OUT
CD IN
CS42
RESET
MCLK
OVL/ERR
CS RESET
CS49
IC1005
SN74HCU04APW
INVERTER
IC1006
SNAHC1U04DBV
OSCILLATOR
IC1003
SN74LV244APW
CONVERTER
IC1004
SN74AHCT244PW
CONVERTER
INTREQ
SCD OUT
AUDATA0
AUDATA1
AUDATA2
XMT958
IC1001
CS49326-CLR
DTS DECODER DSP
+B
8–11,
14–17
4
36
18
7
6
5
19
20
21
EMWR
RESET
CS
SCCLK
SCDIN
DATA0~7
EMOE
SCD OUT
INTREQ
EXTMEN
27
CMP DAT
28
CMP CLK
29
CMP REQ
25
SCLK N1
26
LRCLK N1
22
SDATA N1
30
CLK IN
31
CLK SEL
COMPRESSED DATA INPUT INTERFACE SPDIF RECEIVER
DIGITAL AUDIO INPUT INTERFACE
PARALLEL OR SERIAL HOST INTERFACE
FRAMER SHIFTER
INPUT BUFFER CONTROLLER
RAM INPUT BUFFER
24-bit DSP PROCESSING
RAM PROGRAM MEMORY
RAM DATA MEMORY
ROM PROGRAM MEMORY
RAM DATA MEMORY
STC
RAM OUTPUT BUFFER
OUTPUT FORMATTER
PLL CLOCK MANAGER
FILTD
FILTS
VSSA
VDDA
32
33
35
34
MCLK
SCLK
LRCK
AU DATA0
AU DATA1
AU DATA2
XMT958
44
43
42
41
40
39
3
AUDATA0
AUDATA1
AUDATA2
LRCK
SCLK

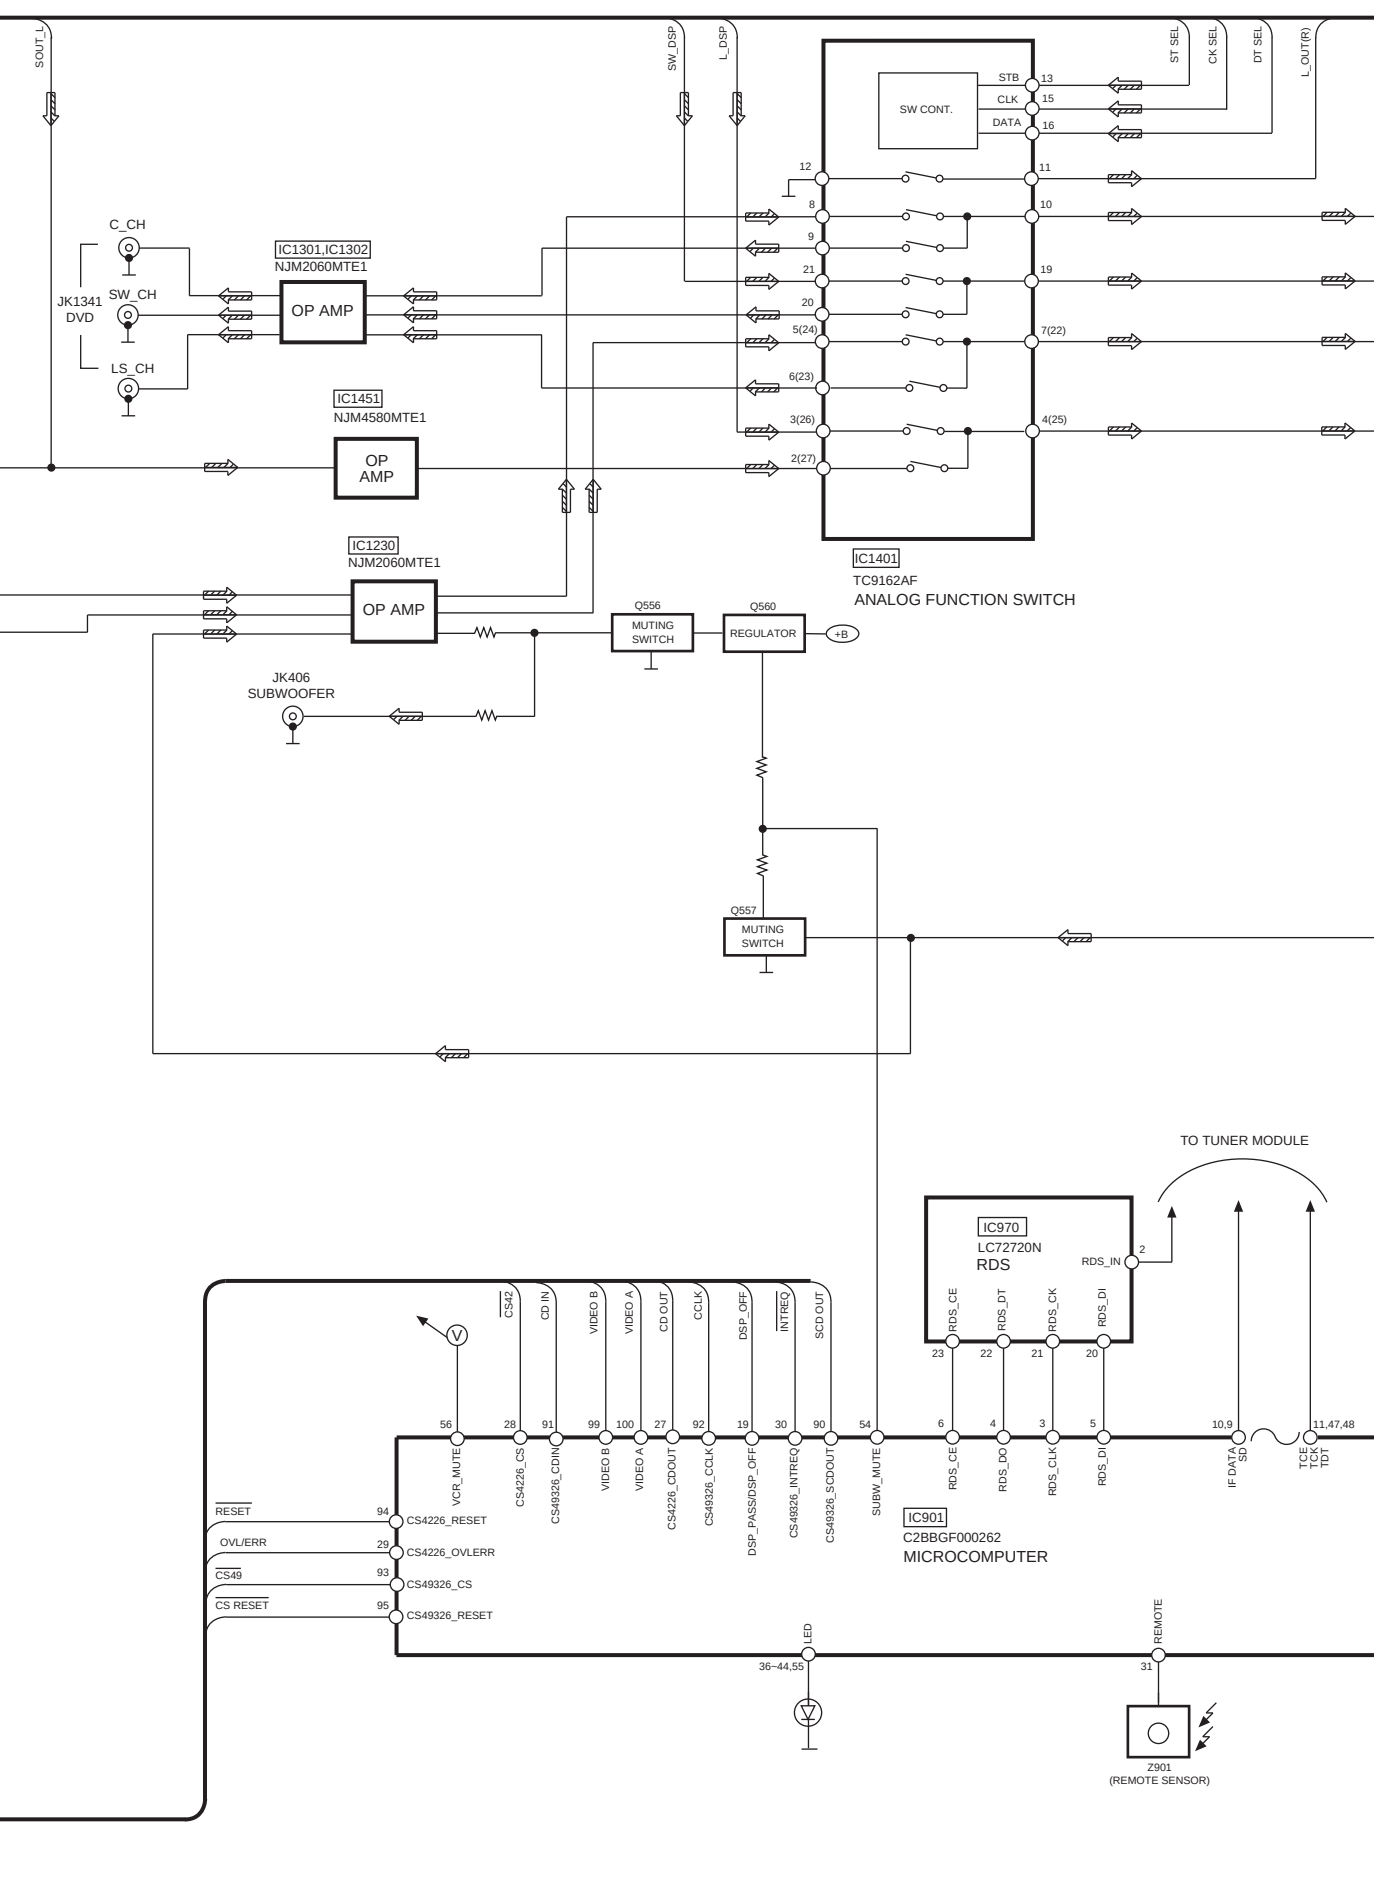
SOUT_L
SW_DSP
L_DSP
ST SEL
CK SEL
DT SEL
L_OUT(R)
SW CONT.
STB
CLK
DATA
13
15
16
12
11
8
10
9
21
19
20
5(24)
7(22)
6(23)
3(26)
4(25)
2(27)
C_CH
SW_CH
LS_CH
JK1341
DVD
IC1301,IC1302
NJM2060MTE1
OP AMP
IC1451
NJM4580MTE1
OP AMP
IC1230
NJM2060MTE1
OP AMP
IC1401
TC9162AF
ANALOG FUNCTION SWITCH
Q556
MUTING SWITCH
Q560
REGULATOR
+B
JK406
SUBWOOFER
Q557
MUTING SWITCH
TO TUNER MODULE
IC970
LC72720N
RDS
RDS_IN
2
RDS_CE
RDS_DT
RDS_CK
RDS_DI
23
22
21
20
V
CS42
CD IN
VIDEO B
VIDEO A
CD OUT
CCLK
DSP_OFF
INTREQ
SCD OUT
56
28
91
99
100
27
92
19
30
90
54
6
4
3
5
10,9
11,47,48
VCR_MUTE
CS4226_CS
CS49326_CDIN
VIDEO B
VIDEO A
CS4226_CDOUT
CS49326_CCLK
DSP_PASS/DSP_OFF
CS49326_INTREQ
CS49326_SCDOUT
SUBW_MUTE
RDS_CE
RDS_DO
RDS_CLK
RDS_DI
IF DATA
SD
TCE
TCK
TDT
RESET
94
CS4226_RESET
OVL/ERR
29
CS4226_OVLERR
CS49
93
CS49326_CS
CS RESET
95
CS49326_RESET
IC901
C2BBGF000262
MICROCOMPUTER
LED
36~44,55
REMOTE
31
Z901
(REMOTE SENSOR)

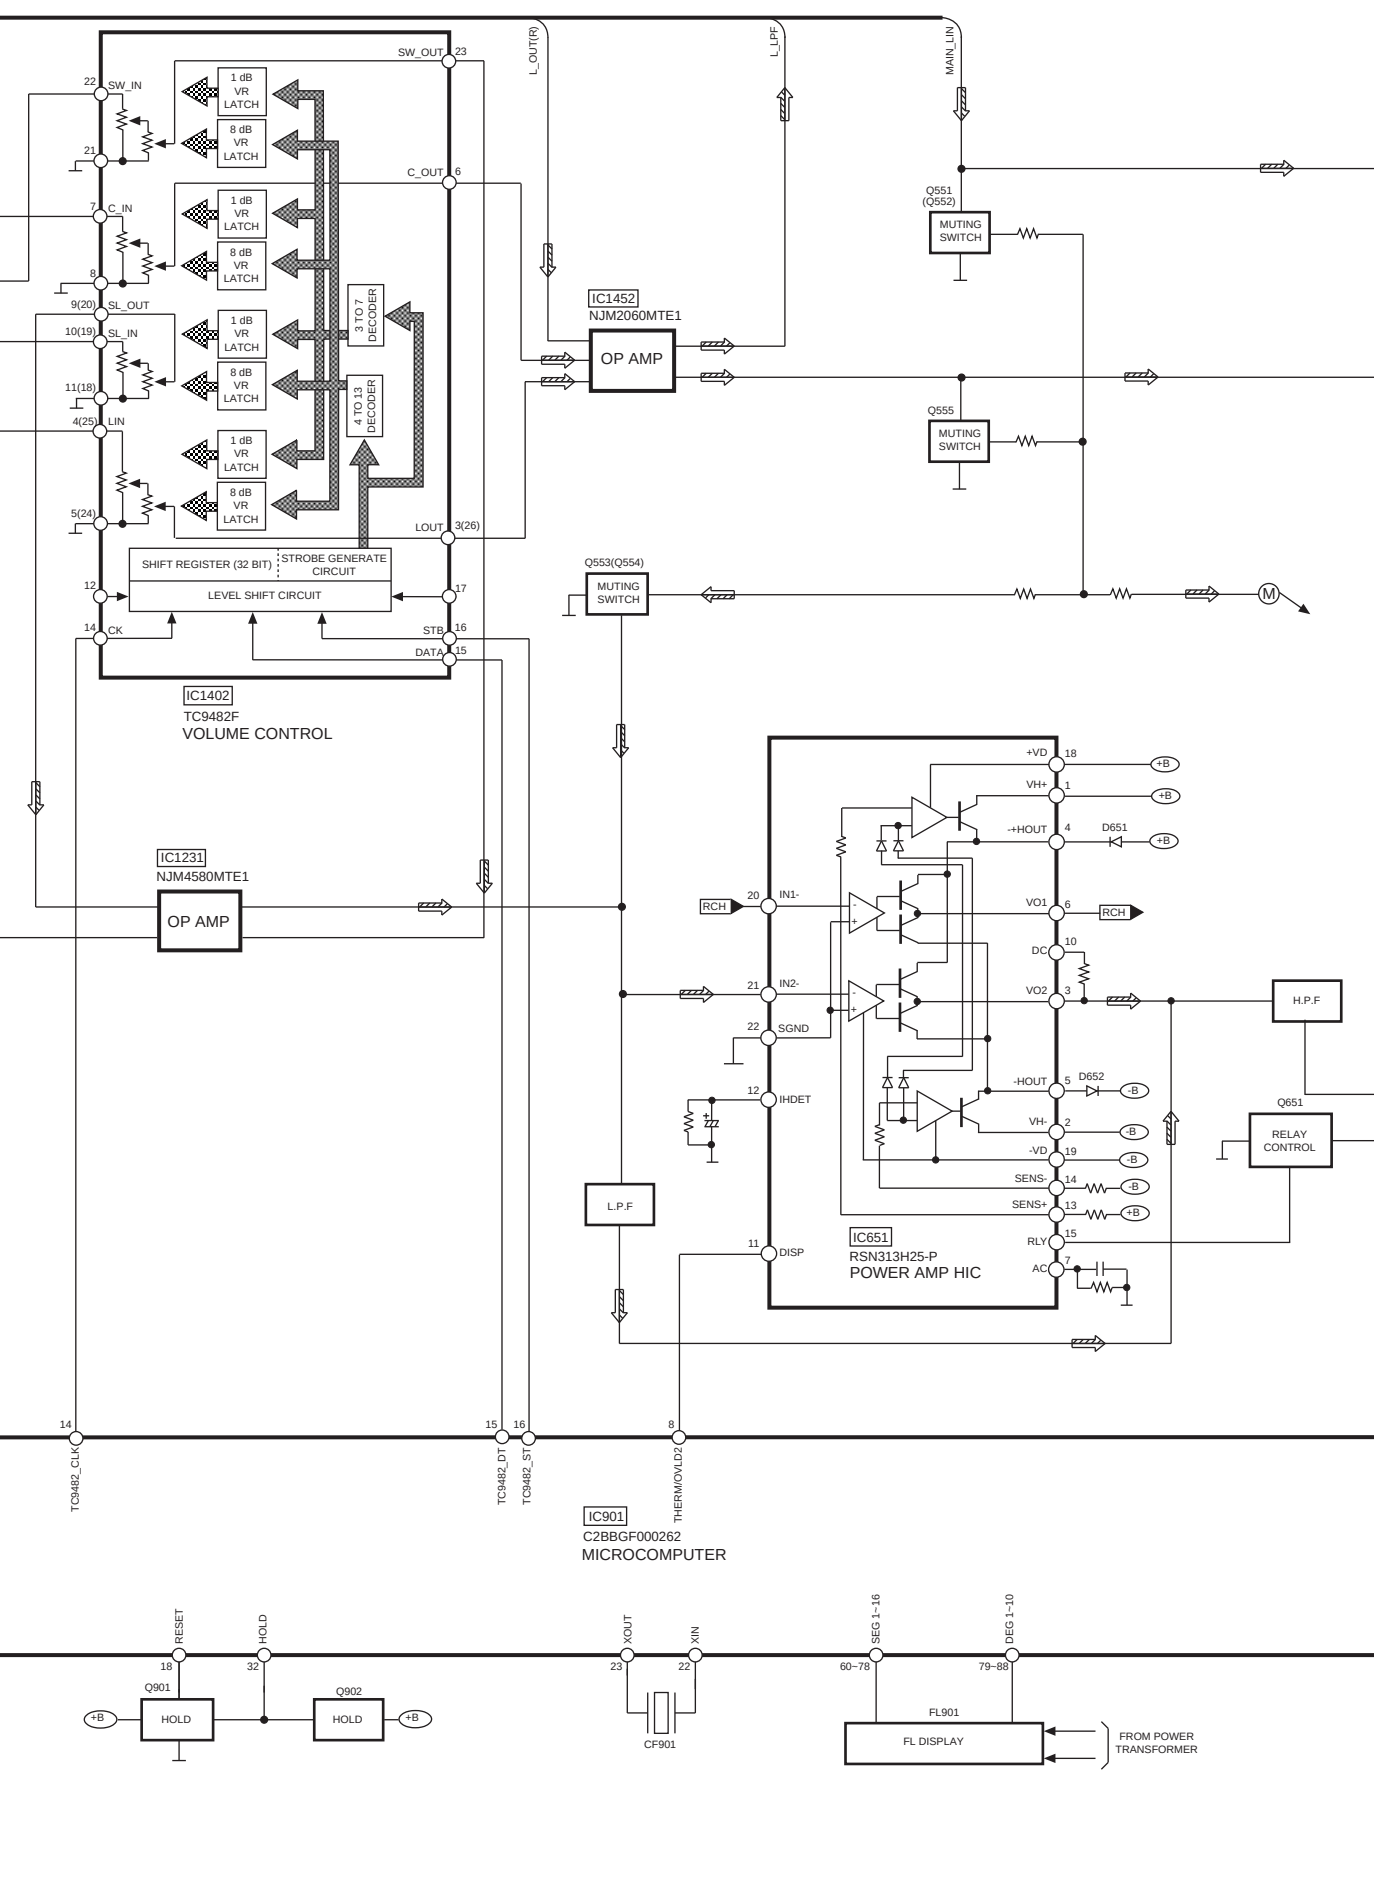
SW_OUT 23
22 SW_IN
21
C_OUT 6
7 C_IN
8
9(20) SL_OUT
10(19) SL_IN
11(18)
4(25) LIN
5(24)
LOUT 3(26)
1 dB VR LATCH
8 dB VR LATCH
3 TO 7 DECODER
4 TO 13 DECODER
SHIFT REGISTER (32 BIT)
STROBE GENERATE CIRCUIT
LEVEL SHIFT CIRCUIT
12
17
14 CK
STB 16
DATA 15
IC1402
TC9482F
VOLUME CONTROL
L_OUT(R)
L_LPF
MAIN_LIN
IC1452
NJM2060MTE1
OP AMP
Q551 (Q552)
MUTING SWITCH
Q555
MUTING SWITCH
Q553(Q554)
MUTING SWITCH
M
IC1231
NJM4580MTE1
OP AMP
+VD 18
VH+ 1
-+HOUT 4
D651
+B
RCH 20 IN1-
VO1 6
RCH
DC 10
21 IN2-
VO2 3
H.P.F
22 SGND
12 IHDET
-HOUT 5
D652
-B
VH- 2
-VD 19
SENS- 14
SENS+ 13
RLY 15
AC 7
Q651
RELAY CONTROL
L.P.F
11 DISP
IC651
RSN313H25-P
POWER AMP HIC
14 TC9482_CLK
15 TC9482_DT
16 TC9482_ST
8 THERM/OVLD2
IC901
C2BBGF000262
MICROCOMPUTER
RESET 18
HOLD 32
Q901
Q902
HOLD
HOLD
+B
XOUT 23
XIN 22
CF901
SEG 1–16 60–78
DEG 1–10 79–88
FL901
FL DISPLAY
FROM POWER TRANSFORMER

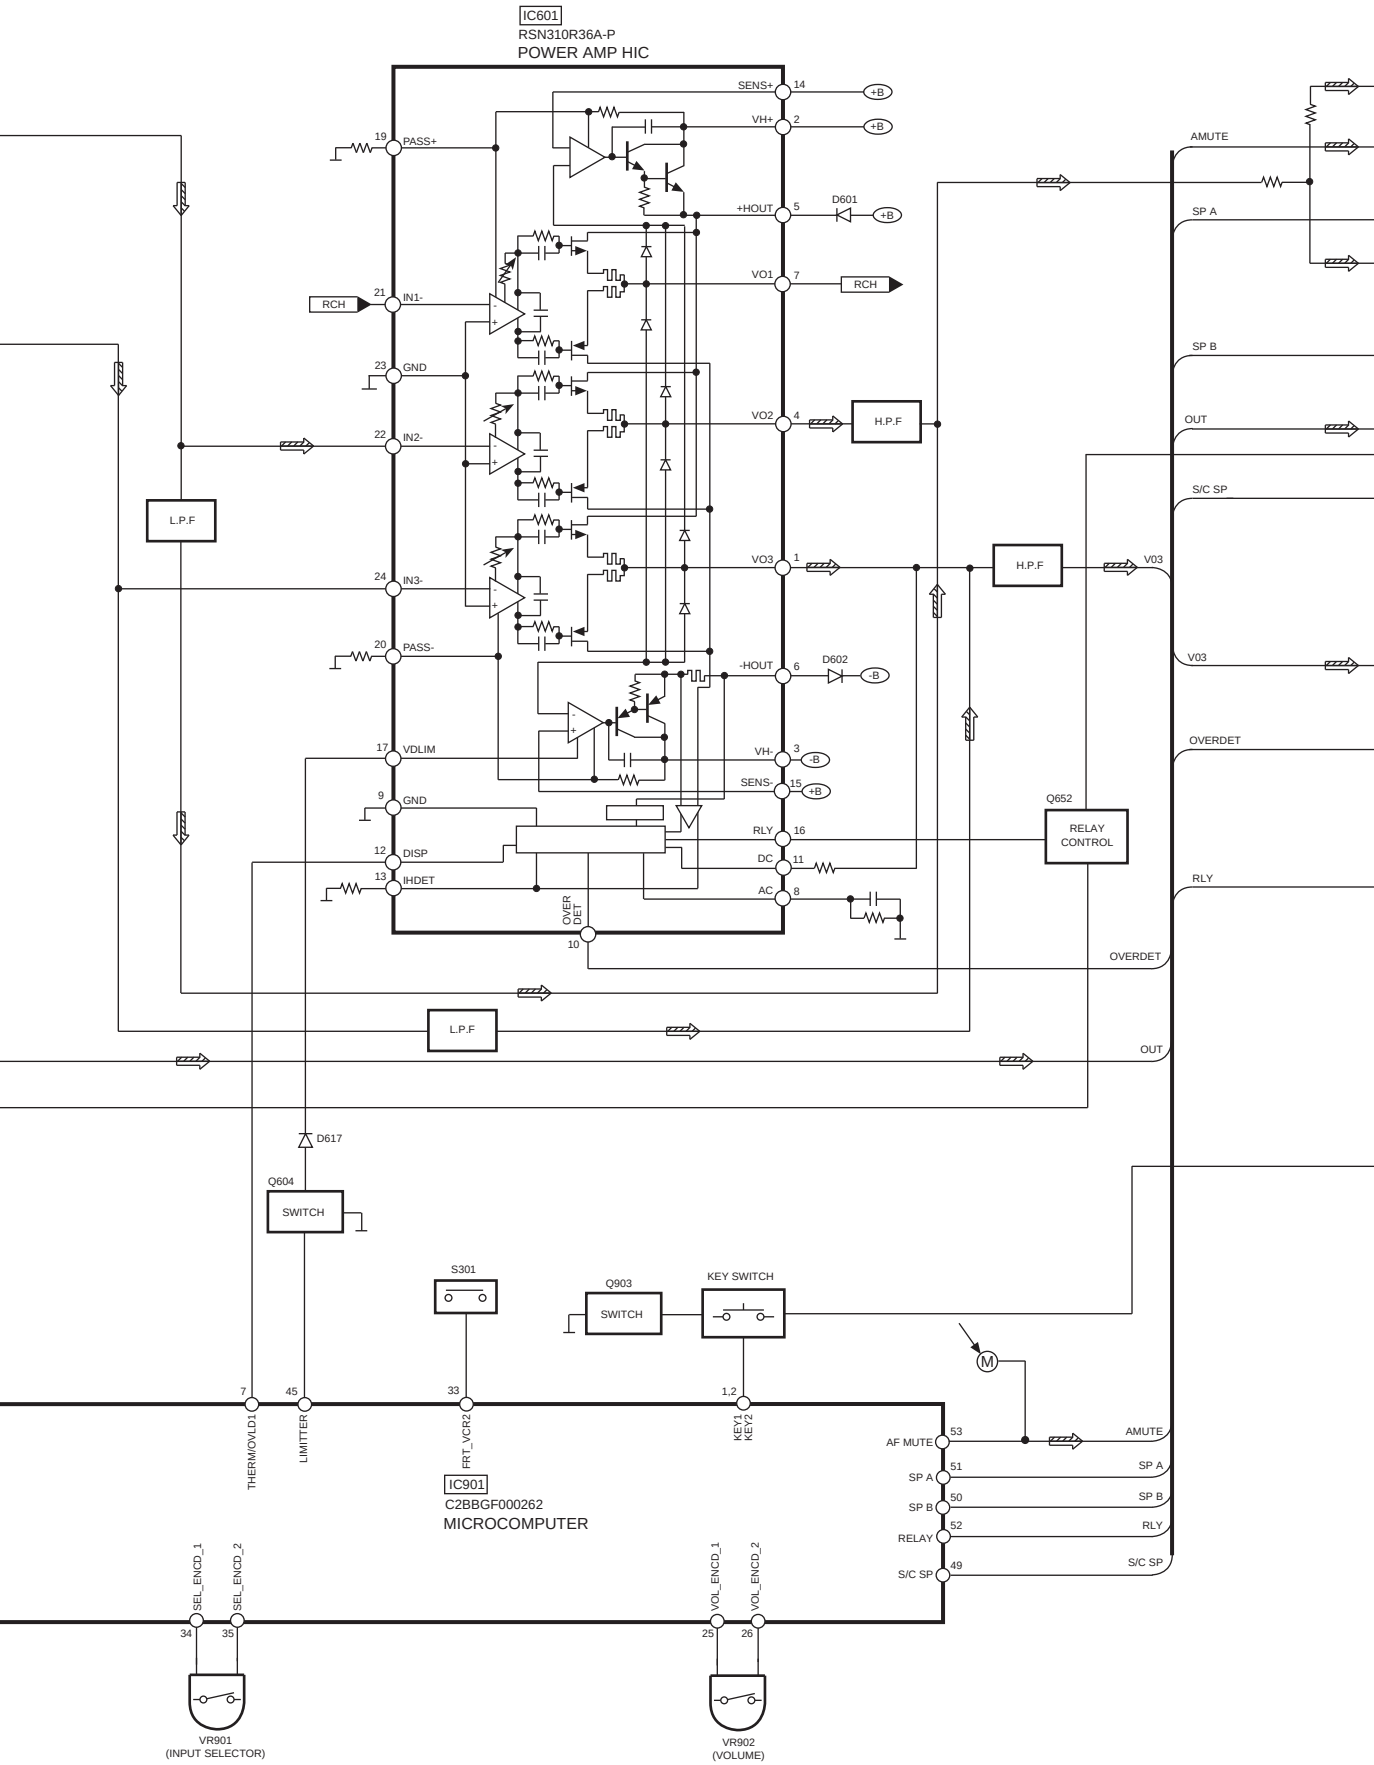
IC601
RSN310R36A-P
POWER AMP HIC
SENS+
VH+
+HOUT
VO1
VO2
VO3
-HOUT
VH-
SENS-
RLY
DC
AC
PASS+
IN1-
GND
IN2-
IN3-
PASS-
VDLIM
GND
DISP
IHDET
OVER DET
+B
-B
D601
D602
RCH
L.P.F
H.P.F
AMUTE
SP A
SP B
OUT
S/C SP
V03
OVERDET
RLY
Q652
RELAY CONTROL
D617
Q604
SWITCH
S301
Q903
SWITCH
KEY SWITCH
THERM/OVLD1
LIMITTER
FRT_VCR2
KEY1
KEY2
IC901
C2BBGF000262
MICROCOMPUTER
AF MUTE
SP A
SP B
RELAY
S/C SP
SEL_ENCD_1
SEL_ENCD_2
VOL_ENCD_1
VOL_ENCD_2
VR901
(INPUT SELECTOR)
VR902
(VOLUME)

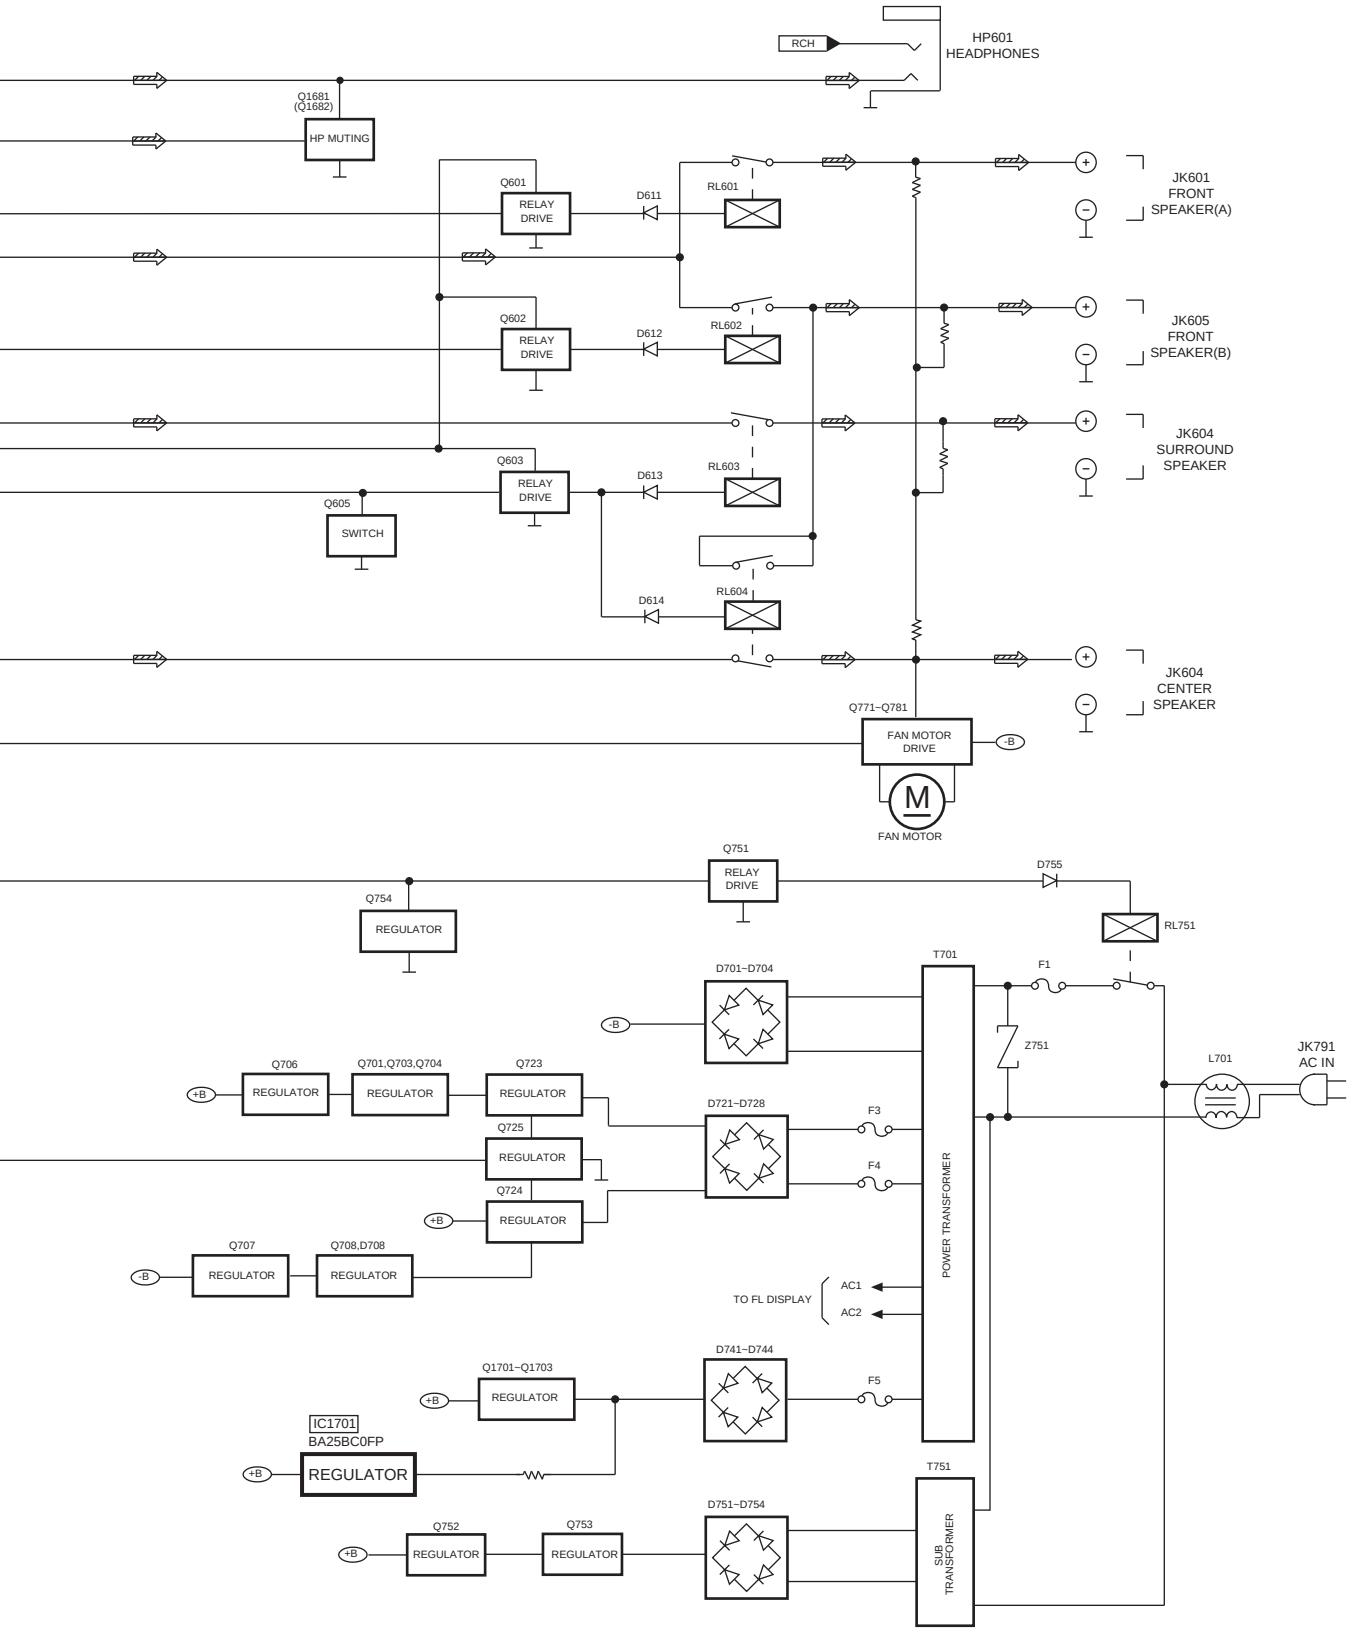

SIGNAL LINES

MAIN SIGNAL LINE	RECORD SIGNAL LINE
CD SIGNAL LINE	PLAYBACK SIGNAL LINE

( ) indicates Pin No. of right channel.

C2BBGF000262 (80p)
CS49326-CLR (40p)
CS4226-KQG (44p)



RSN313H25-P



NJM2279MTE1 (14p)



BA25BC0FP



AN6558F
NJM2115MTE1
NJM4580DD
NJM4580MTE1



SNAHC1U04DBV



NJM2060MTE1



TC9163AN



RSN310R36A -P



TC9162AF (28p)
TC9482F (28p)



SN74LV244APW (20p)
SN74HCT244PW (20p)
SN74HCU04APW (14p)



LC72720N (24p)



2SA1534AQRTA
2SC3940AQSTA



2SD1915FTA



2SK2880CTA



2SB1548PQAU
2SD2374PQAU



2SB621AQSTA
2SD592AQSTA



DTA114YETL



2SD2137PQTA



2SA933SQRSTA
2SC1740SSTA
2SC1740SQSTA
RVTDTA114EST
RVTDTC114YST
RVTDTA143XST
RVTDTC143ZST
RVTDTC114EST
RVTDTA113ZST



1SS355TE17
UDZSTE176R2B
UDZSTE175R6B



1N5402BM21
RK306LFU1



SLR325MCT31
SLR325YCT31
SLR325VCT31



MTZJ16CTA
MTZJ33DTA
MTZJ3R9ATA
MTZJ5R6BTA
MTZJ6R2BTA
MTZJ6R8BTA
MTZJ7R5CTA
MTZJ3R3ATA

MTZJ8R2CTA
1SS291TA
RVD1SS133TA
1SR35400V
RB721Q40T77



MA167ATA